

Original Research Articles

Interference Cancellation by Regenerated Signals in Cellular Network System

Ukhurebor Kingsley E; Maor Moses S; Aigbe Efosa E and Adeel Munir

Department of Physics, Edo University, Iyamho, Edo State, Nigeria

ukeghonghon@gmail.com

Abstract

Interference reduces the signal quality of any cellular network system and is a major problem in Radio Access Network that need to be addressed because its causes degradation of the signal quality thereby reducing the quality of service of the particular network service provider. Hence, interference must be controlled and managed in other to improve the quality of signal in the cellular network system. This research presents a method of interference reduction by canceling interference by regenerated signals from a cellular network by analyzing the network data from the network statistics using the Microsoft Excel tool. This technique regenerates demodulated uplink data signals for High Speed Uplink Packet Access capable User Equipment and cancels interference by the regenerated signals. This technique will reduce the Multiple Access Interference, improves demodulation performance and increase the uplink system capacity in Wideband Code Division Multiple Access (WCDMA) of the cellular network system.

Keywords: Interference, Cellular Network, Uplink, Signal, Demodulation

Acronym	Meaning
1xRTT	Single Carrier Radio Transmission Technology
AMPS	Advanced Mobile Phone System
AMR	Adaptive MultiRate
AuC	Authentication Centre
BSC	base station controller
BTS	base transceiver station
CDMA	Code Division Multiple Access
CODEC	Coding/Decoding
CS	Circuit Switched
CSSR	Call setup success rate
DAMPS	Digital Advanced Mobile Phone Service
DPCCH	Dedicated Physical Control Channel
DPDCH	Dedicated Physical Data Channel
E_AGCH	E-DCH Absolute Grant Channel
E_DPCCH	E-DCH Dedicated Physical Control Channel
E_DPDCH	E-DCH Dedicated Physical Data Channel
E_RGCH	E-DCH Relative Grant Channel
E-DCH	Enhanced Dedicated Channel
EDGE	Enhanced Data rates for GSM Evolution
E-HICH	E-DCH Hybrid ARQ Indicator Channel

EIR	Equipment Identity Register
EPC	Evolved Packet Core network
EVDO	Evolution-Data Optimized
GGSN	Gateway GPRS Service Node
GPRS	General Packet Radio System
GSM	Global System for Mobile Communications
HLR	Home Location Register
HSDPA	High Speed Downlink Packet Access
HSDPA UE	High Speed Downlink Packet Access User Equipment
HSDPCCH	High Speed Downlink Packet Access Dedicated Physical Control Channel
HSPDSCH	High-Speed Physical DL Shared Channels
HSS	Home Subscriber Server
HSUPA	High Speed Uplink Packet Access
HSUPA UE	High Speed Uplink Packet Access User Equipment
IMS	IP Multimedia Subsystem
KPI	Key Performance indicators
LTE	Long Term Evolution
MGW	Media Gateway
MME	Mobility Management Entity
MSC	Mobile Switching Center
NMT	Nordic Mobile Telephone
PDC	personal digital cellular
P-GW	PDN-Gateway
PLMN	Public Land Mobile Network
PS	Packet Switched
PSTN	Public Switched Telephone Network
QoS	Quality of Service
R99 UE	Release 99 User Equipment
RNC	Radio Network Controller
RTWP	Receive Total Wideband Power
SGSN	Serving GPRS Service Node
S-GW	Signaling Gateway
SMSC	Short Message service center
TACS	Total Access Communication System
TDMA	Time Division Multiple Access
TD-SCDMA	Time Division-Synchronous Code Division Multiple Access (TD-SCDMA)
UMTS	Universal Mobile Telecommunications System
UTRAN	UMTS Terrestrial Radio Access Network
VLR	Visitor Location Register
WBSS	Wireless Base Station Subsystem
WCDMA	Wide-band Code Division Multiple Access
WiMAX	Worldwide Interoperability for Microwave Access

22

23

24

25

26 1.0 Introduction

27 Mobile telecommunication industries in Nigeria have undergone significant changes and
28 great improvements over the past few decades. Studies have shown that foreign direct
29 investments in telecommunication have effectively improved the economic growth of Nigeria
30 than Government investment; it is therefore, imperative for Nigerian Government to increase
31 its spending on telecommunication and attract more foreign investment in telecommunication
32 in order to boost productivity and economic growth. A well-structured strategic technology
33 alliance relationship among telecommunications firms can also bring about better services for
34 sustainable development in the country [1, 2].

35 Furthermore, the position of the regulatory authorities in developing policies that will address
36 customers' satisfaction based on defined priorities need to be strengthen; that mobile
37 operators should improve the quality of mobile services offered to customers in terms of
38 responsiveness, assurance and empathy in order to achieve high level of customer satisfaction
39 and brand loyalty [3]. The players in the mobile telecommunications industry should strive to
40 raise the level of customer satisfaction by focusing on courtesy and upgrading of their
41 operational facilities in order to widen their coverage area. Also, regulatory authorities,
42 especially the Nigerian Communication Commission (NCC), should step up the level of
43 supervision, while the Government should register and grant licenses to more mobile
44 telecommunication companies to increase competition in the industry [4].

45 In addition, the Nigerian administration should lay emphasis on the expansion of
46 telecommunication facilities to rural areas. Aside from telegraphs, telephones, and facsimiles,
47 the eventual introduction of digital radio, digital switches and optical fiber broadcasting
48 should be completed. Like any other developing Nation, Nigeria must regard
49 telecommunications as a crucial ingredient to economic and industrial progress [5].

50 However, there have been some limitations to the development of the cellular network system
51 not only in Nigeria but also in some part of the World especially in developing Countries [6,
52 7]. In cellular network system, it is however difficult to manage the medium of transmission
53 because of interference waves and noise problems that are not easy to mitigate. Interference
54 which is anything that changes or disrupts a signal as it moves along a channel between a
55 source and a receiver; typically it is the addition of signals that are not welcome or wanted to
56 a needful signal and which is the sum of all signal contributions that are neither noise nor the
57 wanted signal is a fundamental limiting factor in the performance of cellular network
58 systems. In cellular networks, interference is one of the most common problems in the Radio
59 Access Network (RAN). It is a serious challenge for wireless systems, this is one the main
60 reason why there has been a great attention to the reduction of interference effects on cellular
61 network systems in order to procure sufficient and better quality of service (QoS) for the
62 subscribers [6, 8].

63 Interference is generated by various factors like; thermal noise, intra cell traffic, traffic in
64 adjacent cells and external traffic. Also, the increase in number of users in a cell directly
65 increases the total interference in the network system. Therefore, interference must be

controlled and manage in other to improve the rate at which data is processed and transferred through the network system. During the initial development of cellular network systems, the Global System of Mobile Communication (GSM) which is the second generation (2G) cellular phones generates much interference. Though, the interference from the third generation (3G) cellular phones is considerably lower than the ones from the 2G phones [6, 7]. Interference can cause degradation of signal quality thereby reducing the QoS of the particular network service provider. Some causes and sources of interference are:

- i. Another mobile in the same cell
- ii. A call in progress in the neighboring cell
- iii. Other base stations operating on the same frequency
- iv. Any non-cellular system which leaks energy into the cellular frequency band

(i) and (ii) are the ones prominent with WCDMA. Moreover, even if various wireless services do not produce harmonics, frequency drifts, or Radio Frequency (RF) leakage, cell sites are likely to be affected by internal interference caused by the unsuitable conductivity of passive devices such as connectors, cables, or antennas. This internal interference can produce inter-modulation signals at the same frequency band as mobile transmitters (uplink). The common case of interference internal to the RAN is also caused by frequency re-farming. Network service providers that are transforming their mobile technology to LTE use refarming to achieve higher throughput for mobile devices while maintaining their existing technologies such as GSM and WCDMA. This technique supports a gradual adoption of LTE. The co-existence of multiple technologies in a limited spectrum is making mobile operators to increase the number of carriers and to re-use frequencies, producing a RAN subject to internal interference. Inter-modulation in passive components is produced when two signals are transmitted in a cabling system with improper conductivity characteristics such as loose jumpers, bent cables, different metals in jumpers, or corrosion. This inter-modulation produces signals as products or multiples of the two transmitted signals [9, 10, 11]

2.0 Wideband Code Division Multiple Access (WCDMA)

Wideband Code Division Multiple Access (WCDMA) is a 3G technology that gives a better data transmission rates through the Code Division Multiplexing (CDM) air interface rather than the Time Division Multiplexing (TDM) air interface of Global System of Mobile Communication (GSM) systems. It is compatible with very high speed multimedia services such as full motion video, internet access and video conferencing. It can also easily manage bandwidth intensive applications such as data and image transmission through the Internet. WCDMA is a direct spread technology it spreads its transmissions over a wide range, 5MHz carrier and can carry both voice and data simultaneously via a technique termed Multi-Rab technology. It features a peak data rate of 384 kbps with peak network downlink speed of 2 Mbps and average user throughput of 220- 320 kbps. WCDMA boasts increased capacity over EDGE for high bandwidth uses and features which include; enhanced security, quality of service, multimedia support and reduced latency. It is compatible with fiber based wireless access using radio over fiber (RoF) technology. Access schemes effectively combine the high capacity of optical fiber with the flexibility of wireless networks. WCDMA RoF systems have great influence not only on multiple-user interference but also on inter-modulation distortion and clipping noise power.

WCDMA or the family of Universal Mobile Telecommunications System (UMTS) along with UMTSFDD, UTRA-FDD or IMT-2000 CDMA Direct Spread are air interface standard

found in 3G mobile telecommunications networks that is being developed as WCDMA. Unlike GSM and GPRS which rely on the use of the TDMA protocol, WCDMA which is like CDMA allows all users to transmit at the same time and to share the same RF carrier. Each mobile user's call is uniquely differentiated from other calls by a set of specialized codes added to the transmission [10].

Interference is a major factor in CDMA technology due to the fact that communications occur on the same frequency band and time slot as in the UMTS FDD mode; it has a direct link to coverage and capacity of such network system. So, understanding the connection between coverage and capacity and how it is affected by interference and transmit power which is essential for UMTS network planning for optimization purposes. The interference level is directly connected to the user's density in the considered cell and its neighbors and affects both the cell range and the capacity of the system. The higher the numbers of the users in the network system the greater the interference and the smaller the cell range. Many factors are responsible for interference in a network system; Radio Frequency (RF) interference to mobile communication network may be caused by such parameters as an original dedicated radio system occupying an existing frequency resource, improper network configuration by different operators (value of power), cell overlapping, the radio channel, electromagnetic compatibility (EMC) and external interference sources. The main forms of interference to mobile communication systems mainly include: common-frequency interference, adjacent-frequency interference, out of band spurious emission, inter-modulation emission, and blocking interference. The difficulties of interference between systems working in different frequencies are caused by hardware problem in the transmitter (Tx) and the receiver (Rx). In addition, the interference between the Tx and the Rx depends on some parameters like the interval between the working frequency ranges of the two systems and the spatial distance which separate the Tx and Rx. For a WCDMA system, the interference can be produced by different means, such as; thermal noise, traffic intra-cell, traffic in adjacent cells and external traffic [7, 12].

3.0 High Speed Uplink Packet Access (HSUPA)

In Release 5, HSDPA technology was introduced. This greatly increased downlink transmission rate. The HSUPA was introduced in order to meet with the increasing demands for data services in uplink from the 3GPP Release 6. The technical advancements in HSUPA include fast scheduling, fast hybrid automatic repeat request (HARQ), shorter transmission time interval (TTI), and macro diversity combining (MDC). Benefits of HSUPA were improvement in the uplink capacity, increase in user data rate, and reduction in the transmission delay on the WCDMA network.

HSUPA has the following impacts on the network:

- i. A new control channel that needs greater power in the uplink, called E-DPCCH.
- ii. When the uplink load is not sufficient and there is a huge number of UEs, the UEs can upload data only at a guaranteed bit rate (GBR), for example, 64 kbit/s. As compared with R99 channels, E-DPCCH consumes more system resources.

3.1 HSUPA Channels

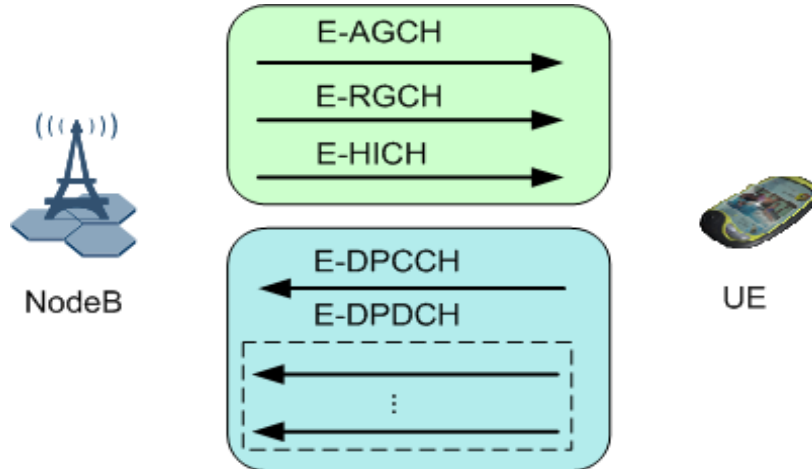


Figure 1: HSUPA Physical Channels [9]

The enhanced dedicated channel (E-DCH) has a TTI of either 10 ms or 2 ms. It is mapped onto the E-DPDCH or E-DPCCH. When the TTI is 10 ms, the E-DCH gives a better uplink coverage performance; when the TTI is 2 ms, the E-DCH gives greater transmission rates.

The E-DPDCH carries data in the uplink. The spreading factor of the E-DPDCH changes from SF256 to SF2 as a result of the data transmission rate.

The E-DPCCH carries control information related to data transmission in the uplink. The control information is made up of the E-DCH transport format combination indicator (E-TFCI), retransmission sequence number (RSN), and happy bit. The SF of the E-DPCCH is fixed to 256.

To carry out the HARQ function, the E-HICH is added in the downlink. The E-HICH transfers the retransmission requests from the Node B. The SF of the E-HICH is fixed to 128.

The downlink E-AGCH and E-RGCH transfer the HSUPA scheduling control information. The E-AGCH is a shared channel, which transfers the maximum E-DPDCH to DPCCH power ratio, that is, absolute grants. The SF of the E-AGCH is fixed to 256.

The E-RGCH is a dedicated channel, which is used to point out the relative grants and increase or decrease the maximum E-DPDCH to DPCCH power ratio. The SF of the E-RGCH is fixed to 128 [9].

4.0 Methodology

As stated earlier, interference in WCDMA is generated by different attributes such as thermal noise, intra cell traffic, traffic in adjacent cells and external traffic. Therefore, the use of regenerated signal from the network statistics as a suitable technique to mitigate and possibly cancel the interference was employed in this work because this strategy reduces the Multiple Access Interference (MAI), improves demodulation performance and increases the uplink system capacity. The network statistics was analyzed using Microsoft Excel tool. Interference cancellation procedures and objectives are as itemized beneath:

- (i) The network detects E-DPDCH signals from HSUPA User's Equipments (UEs).
- (ii) The network regenerates signals of UEs on their respective E-DPDCHs by using the detection results and channel estimation results.
- (iii) The regenerated signals are then removed from the received signals and demodulated.
- (iv) The network demodulates and decodes the baseband signals with interference canceled.

5.0 Discussion of Results

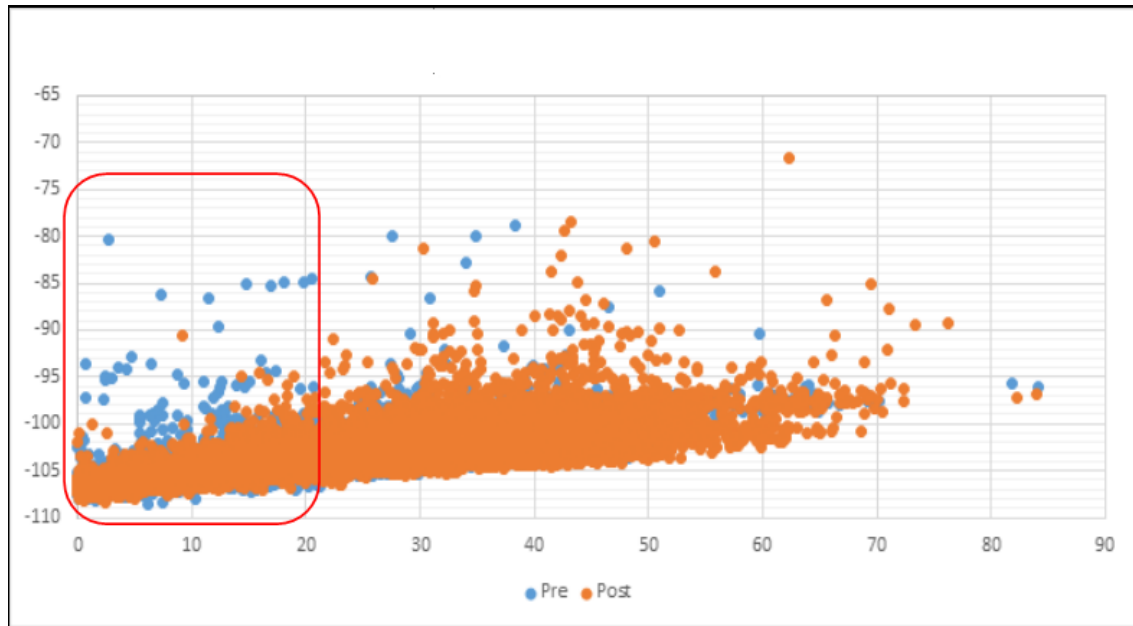


Figure 2: Number of DCH UE's as Compared to UL Load of Different Cells

It can be seen from Figure 2 chart showing DCH User Number versus RTWP trend that post RTWP samples have shifted to lower values particularly on cells with DCH UE numbers less than 20. This is a great achievement as for cells with lower user numbers, whose experience was supposedly very poor as result of high RTWP was greatly improved.

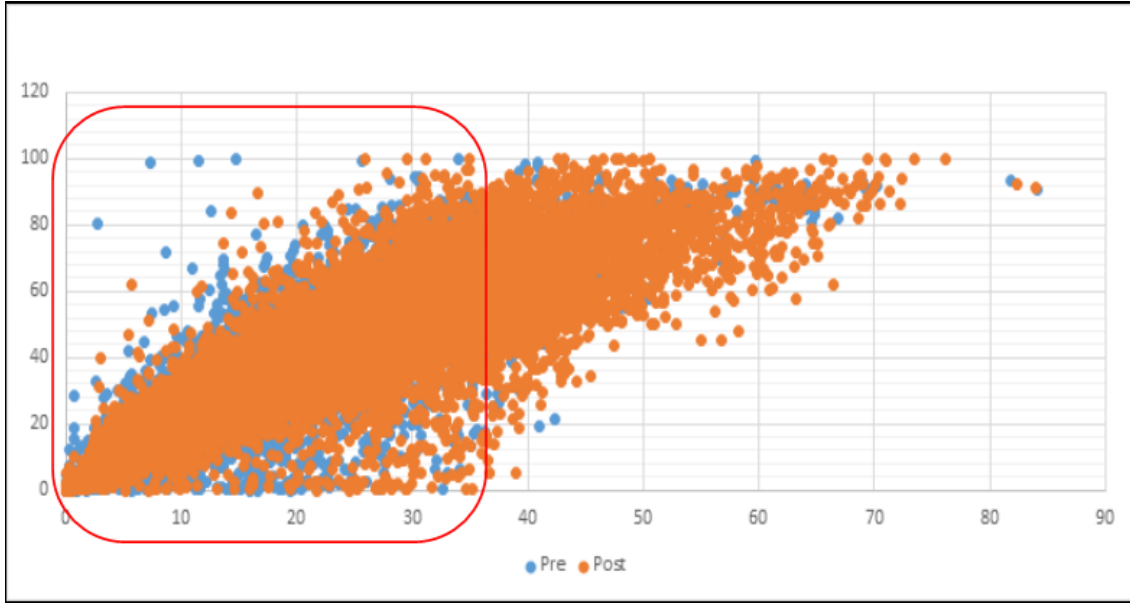


Figure 3: Mean UL Power Load as Compared to Number of DCH UE's in a Cell

From Figure 3, while PS and CS traffic trend was stable, uplink load has reduced as can be seen from the comparison of Number of DCH UEs and uplink load factor, especially as the DCH User number approaches a hallmark of 35 users. This implies an increased capacity as more users can camp on these cells with minimal impact on the loading factor of the cells.

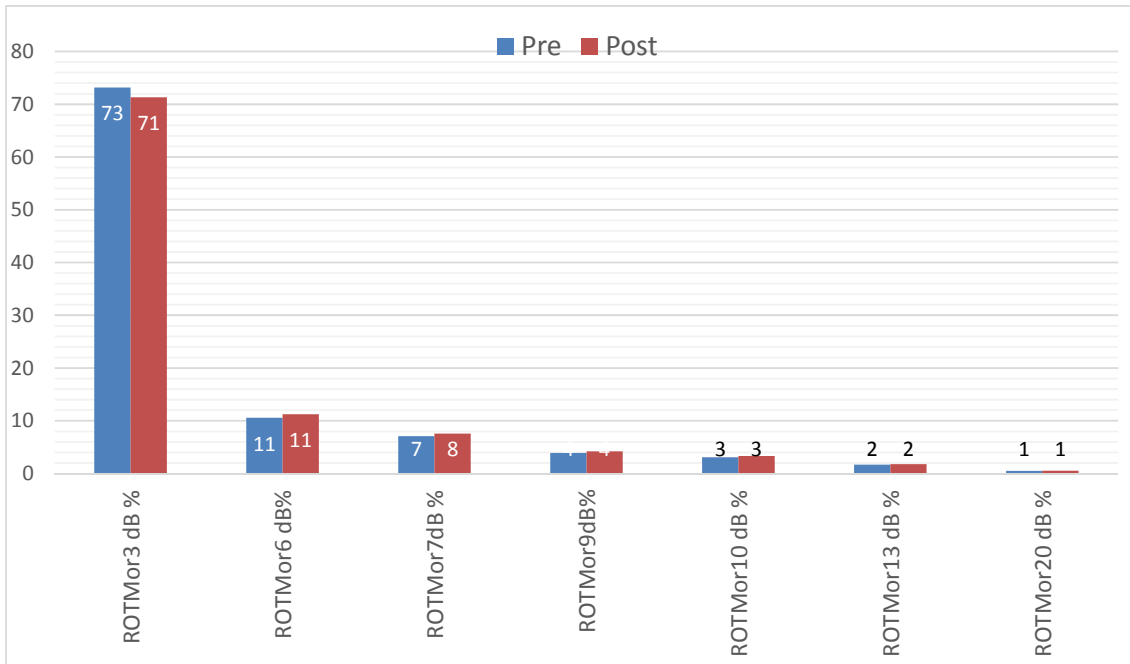


Figure 4: Number of TTIs in which HSUPA Users have Data to Transmit under Different Uu Interface Loads in a Cell (X=3, 6, 7, 9, 10, 13, 20)

From Figure 4 chart it can be seen that the percentage share of each bins corresponding to different load ranges in the air interface. Although percentage share of 3dB load range is lower in the post as compared to the pre implementation value, it still had more samples in the post as compared to pre and due to more samples even in the other load ranges. 3dB range is more impacted by this study.

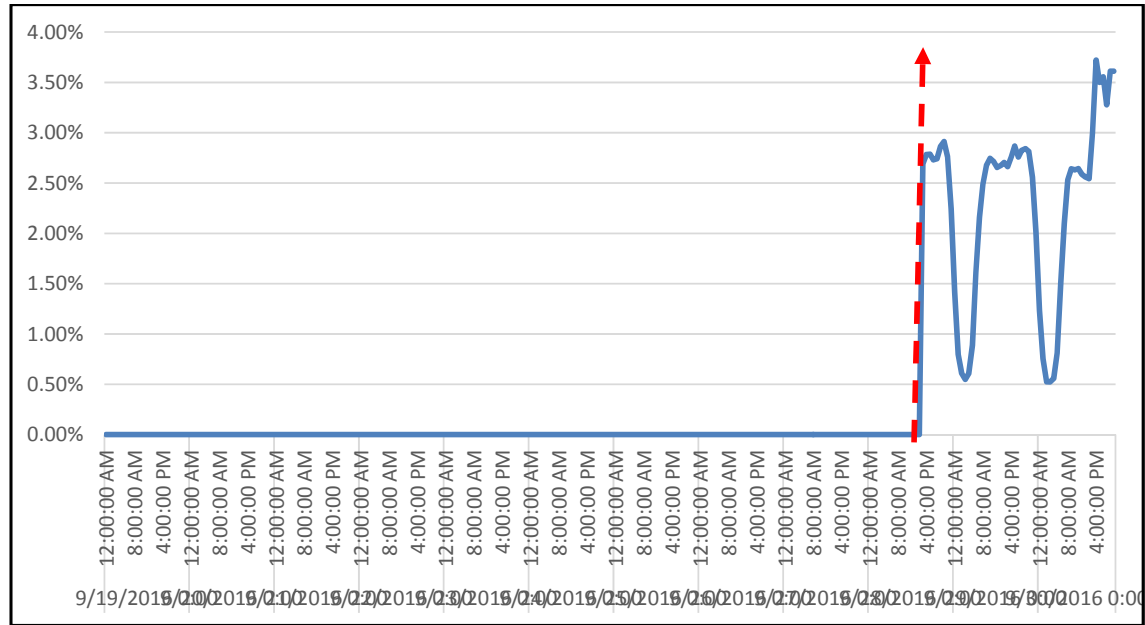


Figure 5: Mean Interference Cancellation Efficiency (%)

From Figure 5, the mean interference efficiency improved from 0% to about 3%. This measures the effectiveness of this technique and the gains from using this technique in UMTS HSUPA interference mitigation.

6.0 Conclusion and Recommendations

From the results of our analysis we have been able to propose an interference reduction and cancellation technique in WCDMA using the regenerated signals in this research work to cancel the Uplink interference in HSUPA capable UEs.

Hence, by using the regenerated signals technique of Uplink interference cancellation, we have demonstrated the efficiency of this technique through the simulated results. This technique absolutely cancels interference. In addition, it considerably increases the mean cell capacity and average quality of the cellular network system.

It is therefore recommended that cellular network service providers should adapt this strategy in mitigating interference in WCDMA in other to implore and optimize the quality of service generally.

234 7.0 References

- 235 [1] Oyeniran W.I and Onikosi-Alliyu S (2016). Information and Telecommunication
236 Infrastructure and Economic Growth: An Experience from Nigeria. *Serbian Journal of*
237 *Management*, 11 (2), pp. 275-289
- 238 [2] Ajao B.F ; Oyeibisi T ; Aderemi H and Jegede O (2015).Status and Impact of Strategic
239 Technology Alliances among Telecommunications Firms in Nigeria. *International Journal of*
240 *Business Performance Management*, 16 (2-3), pp. 339-351
- 241 [3] Olatokun W.M and Ojo F.O (2014). Influence of Service Quality on Consumers'
242 Satisfaction with Mobile Telecommunication Services in Nigeria. *Information Development*,
243 32 (3), pp. 398-408
- 244 [4] Adetayo J.O and Apollos E.A (2013) An Overview of Service Delivery and Customer
245 Satisfaction in the Telecommunications Industry in Nigeria. *Indian Journal of Marketing*, 43
246 (8), pp. 14-22
- 247 [5] Ajayi G.O; Salawu, R.I and Raji T.I (2011). Nigeria: After a Century of
248 Telecommunications Development, What Next? Telecommunications in Africa
- 249 [6] Ukhurebor Kingsley E; Maor Moses S and Aigbe Efosa E (2017) Mollification of
250 WCDMA Interference on Uplink Channels in Cellular Network Using the PowerControl
251 Approach *British Journal of Applied Science & Technology*20(4): pp.1-11
252
- 253 [7] Mohan N and Ravichandran T (2012) Interference Reduction Technique in WCDMA
254 using Cell Resizing *International Journal on Computer Science and Engineering ISSN :*
255 *0975-3397 Vol. 4 No. 07 pp.1330 – 1337*
- 256 [8] Jraifi A; R.A. Laamara R.A; Belhaj A and Saidi E.H (2010) A Proposal Solution for
257 Interference Inter-Operators *Progress In Electromagnetics Research C*, Vol. 12, pp.15–25
- 258 [9] 3GPP TS 25.321
- 259 [10] Owen R; Jone P; Dehgan S and Lister D (2000) Uplink Interference: Theory and
260 Practice in *Proc of VTC 2000 Spring – IEEE Technology Conference, Tokyo, Japan*.
- 261 [11] Nuno Borges de Carvalho and Raquel Castro Madureira (2011) Intermodulation
262 Interference in the GSM/UMTS Bands. *Proc 3a Conf. de Telecomunicações (Conftele 2001)*
- 263 [12] Periyasamy M Mariappan; Dhanasekaran R. Raghavan; Shady H.E Abdel Aleem and
264 Ahmed F Zobaa (2016) Effects of Electromagnetic Interference on the Functional Usage of
265 Medical Equipment by 2G/3G/4G Cellular Phones: A Review. *Journal of Advanced*
266 *Research*; 7; pp.727-738

267