

# High Temperature Effects inside the Combustion Chamber of a Drop Tube Furnace (DTF) for Different Thermochemical Processes and Biomasses

## Abstract

Thermochemical and biochemical processes are used to convert biomass into useful energy and sustainable. Thermoconversion processes comprises the burning of biomass in an environment rich in oxygen or air absence, where types and fuel properties, process conditions, particles size, air flow rate and fuel moisture affect directly the combustion characteristics, altering the generation and heat transfer and the rates of reaction. The combustion chamber temperature has a role important in the biomasses combustion, because this exerts large influence in the thermal processes efficiency, products yield and composition of the generated products. For this reason, this paper aims to investigate the temperature behavior inside of the combustion chamber of a Drop Tube Furnace (DTF) for the thermochemical processes (conventional combustion, pyrolysis and two typical oxy-fuel combustion atmospheres), when five Brazilian biomasses (pine sawdust, sugarcane bagasse, coffee and rice husk, and *tucumã* seed) are employed. Such monitoring *in situ* was performed using two thermocouples located inside the furnace: one in the upper and other in bottom part. Results showed that for the different biomasses and atmospheres, it was observed a trend in the internal temperature variations and residence times measured by thermocouples, which can be related to biomass feeding system and specific furnace operation conditions.

**Keywords:** pyrolysis, oxy-fuel combustion, thermal processes, simulation, efficiency, gases composition.

## 1. INTRODUCTION

In terms for using energy alternative sources, Brazil has a privileged position compared to other countries. Regarding mainly the production of sugarcane and coffee, our country is one of the major producers worldwide [1-2].

At last years, occurred a crescent consensus worldwide that fossil fuels are main responsible for promoting environmental damages and, as consequence, climate changes in the Planet and still interfere directly in the human health, animals and plants [3-4].

The new technologies developing aims to mitigate this situation, for example, an alternative promising is the use of renewable fuels for the energy production [5]. Several studies has been conducted to elucidate the various thermal conversion processes using biomasses [3,5-10].

However, for a perfect understanding of the central point of this research, will be necessary a brief literature review of some studies about the combustion of different lignocellulosic materials and atmospheres in a DTF.

According to Adams *et al.* (1999) [11], Drop Tube Furnaces (DTFs) are commonly used for the obtaining of kinetic parameters from pyrolysis processes or oxidation of different concentrations, and gases composition. The DTF need to present information well defined about temperatures, oxygen concentrations and residence times.

The reactivity of the sawdust char combustion in a DTF was investigated by Meesri and Moghtaderi (2003) [12], in this study involved the experimental determination of the global kinetic parameters of the oxidation reaction of the sawdust char. Results indicated that large part of the oxidation reaction of the sawdust char occurred at second regime, *i.e.*, the heterogeneous chemical reaction rates and oxygen diffusion in the internal pores are comparables.

Biagini *et al.* (2005) [13] developed a drag flux reactor or Drop Tube Furnace (DTF) in lab-scale for characterizing a biomass (hazelnut shell) and bituminous coal (Kema). Some experimental techniques were applied for determination of the conversion degree, reactivity and morphology of the solid fuels. An attention special was given by authors to the feeding device, in order to understand the DTF versatility for different materials or biomasses.

The combustion of a brown coal under  $N_2/O_2$  and  $CO_2/O_2$  mixtures was developed in a Drop Tube Furnace (DTF) of laboratory scale and studied by Zhang *et al.* (2010) [14]. Results indicated that replacing of  $CO_2$  to  $N_2$  significantly affected the coal combustion behavior by the  $CO_2$  physical-chemical influence and  $CO_2$  interaction with char. It was also

observed changes in the coal pyrolysis behavior, by means parameters as ignition point, volatile materials temperature and char particles size, whose were reduced by CO<sub>2</sub> and eliminating all coal oxidation.

Haykiri-Açma *et al.* (2013) [15] evaluated the combustion process efficiency of hazelnut husks in a Drop Tube Furnace (DTF), when these were submitted to average temperatures (600 to 900 °C), commonly in this furnace type are used equal temperatures or superior at 1000 °C. The authors showed that some biomass properties, such as functional groups distribution, quantities of cellulose and lignin, heating value and ignition point were not affected. However, variations in the other properties were noted, for example, remaining volatiles, total organic materials, morphologies and reactivities.

For Wang *et al.* (2014) [16], the biomass particles yielded combustion values comparable to coals, which can be explained by the high volatile materials content in the biomasses, which are released and accelerates the combustion process. The high moisture amount and large size of the biomass particles caused that combustion effects to be decreased. It was also perceived that residence time of the solid fuels (coal, rice and coffee husks, pine branches, straw and residue derived fuels) in the DTF was strongly affected by particles size.

Álvarez *et al.* (2014) [17] studied the co-firing of olive residues with coal fractions in a Drop Tube Furnace (DTF) under typical oxy-fuel combustion and synthetic air atmospheres. In all cases the co-firing of biomass with coal found synergetic effects favorable, improving significantly the combustion and reducing the NO<sub>x</sub> emissions. The samples temperatures were reduced during co-firing, this decrease contributed to assuage the ash formation and deposition in the furnaces bottom.

It was observed that the combustion chamber temperature has an important role in the biomasses combustion, because this exerts great influence in the thermal processes efficiency, products yield and gases composition generated [18]. For this reason and according to the information exposed above, this study aims to investigate the temperature behavior inside the combustion chamber of a Drop Tube Furnace (DTF) for the different thermo-conversion processes: conventional combustion (synthetic air, 80% N<sub>2</sub>), pyrolysis (100% nitrogen) and two typical oxy-fuel combustion atmospheres (60 and 80% CO<sub>2</sub>), when five Brazilian biomasses (pine sawdust, sugarcane bagasse, coffee and rice husks, and *tucumã* seed) are employed.

## 96 2. MATERIALS AND METHODS

### 97 2.1 Biomasses Origin

98 The five *in natura* biomass samples used in this study were collected from different  
99 regions of Brazil, namely: sugarcane bagasse, pine sawdust and coffee husk samples (São  
100 Paulo State, Southeast region); rice husk (Maranhão State, Northeast region) and *tucumã*  
101 seed (Pará State, North region). It is interesting to note that each region exhibits vegetation  
102 and climate has been clearly defined and differentiated. These features facilitate the  
103 plantation of several native species, which require very specific natural conditions.

104

### 105 2.2 Biomasses Preparation

106 The samples have been received *in natura* from their respective regions and underwent  
107 pretreatments that comprised: washing in running water to remove impurities, grinding in  
108 laboratory knives mill to decrease particles size and subsequent sieving for separation in the  
109 required granulometric range. The *in natura* biomass samples have been pulverized using a  
110 household blender and thereafter sieved. For all the biomass samples, average sizes of 0.46  
111 mm particles were selected. The biomass samples used in this research were prepared and  
112 established by standard ASTM (D 2013-72) [19].

113

### 114 2.3 Drop Tube Furnace (DTF)

115 A Drop Tube Furnace (DTF) electrically heated (3.5 kVA maximum power) (Figure  
116 1) was used for all the thermal processes of the biomasses. The basic dimensions of the  
117 experimental apparatus are 60 mm outer diameter, 400 mm uniform zone and 200 mm  
118 heated zone. The biomass particles were introduced into the reactor (DTF) by a feeding  
119 system with vibratory mechanical transport and controlled by PWM (Pulse Wide  
120 Modulation), where the optimal rotational velocities and frequencies were achieved for each  
121 material. The sample mass used was  $3.0 \pm 0.5$  g for a 10-minute experiment. An air primary  
122 flow rate of  $1.5 \text{ L min}^{-1}$  with 20% oxygen concentration was applied to keep the biomass  
123 particles in suspension, during the combustion process in DTF. Such monitoring *in situ* was  
124 performed using two encapsulated K-type thermocouples, located inside the furnace - one in  
125 the upper and other in bottom part, which are positioned at 107 mm and 310 mm,  
126 respectively, regarding as reference an thermocouple that is located in the heated zone at 200  
127 mm.

128

### 129 2.4 Feedind System for the biomass combustion in a DTF

The DTF feeding system which was developed, is composed of a mechanical conveyor of threaded screw has been, with proportional and equidistant holes along the entire surface and a small air injection system in one of the side to assist in the perfect samples removal from the surface of the threaded screw. Such system allows a continuous feeding for the five lignocellulosic materials. The maximum rotational velocity for this system was 15 rpm or 12 V provided by PWM and, the optimum velocities were reached for each biomass.

### 3. RESULTS AND DISCUSSION

Figure 2 presents the temperature variations in the DTF combustion chamber for the pine sawdust samples in the thermochemical processes from conventional combustion (synthetic air -  $N_2/O_2$ : 80/20%), pyrolysis (100%  $N_2$ ) and two typical oxy-fuel combustion atmospheres ( $CO_2/O_2$ : 80/20% and 60/40%).

By means of the temperature profiles determined by two thermocouples (upper and bottom part) some differences were observed for the pine sawdust samples in the various thermal processes. For example, for the conventional combustion the ignition time (burning start) and residence time (experimental measure) were lower than for other atmospheres, around 20 and 900 s, respectively. In this same condition were observed the higher fluctuations and maximum peak temperatures (966, 985 and 967 °C), which can be indicate of the effectiveness combustion process in some determined times and also is related to sample feeding inside the DTF.

These increases abrupt were caused to sample reactivity and solid-gas mixtures, released heat for the high and fast volatiles release and, an environment more oxidative promoted by the  $O_2$  concentration, which accelerate and facilitates the burning [16,20-21]. An decrease in the furnace temperature was observed from 962 to 950 °C and between 385 and 468 s, which may be have been caused by biomass feeding problems. Another possible explanation for this effect can be high moisture proportions in gases inside furnace, whose result in elevated gaseous emissions, due to high capacity of water vapors formation via radiation heat transfer [22].

For the oxy-fuel combustion conditions (60 and 80%  $CO_2$ ) no significant effect on the temperature gradients was observed. The processes started at higher temperatures from 961 and 960 °C, and reached the maximum temperatures from 970 and 968 °C, respectively.

After that, both temperatures showed a stable behavior throughout the process, mainly for the lower temperatures.

However, for the inert atmosphere condition (100% N<sub>2</sub>), simulating pyrolysis, is interesting note that temperatures close to 390 s were overlapped. The temperature measured by bottom thermocouple increased from 948 to 961 °C, while the upper thermocouple temperature decreased from 963 to 960 °C, after which both temperatures presented some homogeneity, but followed in opposite directions from the beginning to the experiment end.

Probably, this effect of gradual decay of the system temperature can be explained, because when the pyrolysis temperature reached  $\approx 900$  °C, a higher restriction in the char devolatilization is caused to mass transfer for diffusion [23]. On the other hand, in the region between 40 and 400 s occurred an increase in temperature from 957 to 963 °C (upper thermocouple), and may be an effect of the volatiles released from the biofuel. For Molina and Shaddix (2007) [20] is expected that volatiles released under N<sub>2</sub> atmosphere burn faster than those released in other oxidizing atmospheres and, consequently, increase the temperature.

Figure 3 present the temperature variations in DTF combustion chamber for the sugarcane bagasse samples in the different thermal processes. For all the atmospheres used for the burning of this sample, mainly noted by bottom thermocouple, temperature profiles presented a practically homogeneous behavior, indicating burning processes in favorable conditions and stables.

For the conventional combustion (synthetic air) and oxy-fuel combustion (60 and 80% CO<sub>2</sub>) conditions for the coffee husk samples (Figure 4) were observed fluctuations regions between 100 and 1000 s, with maximum peaks temperature ranging from 965 to 970 °C. These fluctuations can be effect from a batch feeding of the biomass pulverized, not uniformity in the combustion zone, increase rotation velocity and biofuels random distribution [24-25].

A feeding with continuous flux was planned and it was waited that, by means of several adjusts in the feeding system parameters, for example, rotation velocities could be obtain a homogeneous demand of the samples mass. However, optimal conditions in feeding system not always are possible be obtained and, the temperature curves are good diagnostics for this verification. Another possible explanation for the temperature variations to the long of thermal processes can be due to fast volatiles release and the occurrence of successive exothermic reactions, which also can promote temperature increase [26].

In the pyrolysis ambient for the coffee husks between 100 and 200 s was verified for both thermocouples a decrease in the process temperature (962 and 947 °C, respectively). This decrease can be attributed to the devolatilization process, which is an endothermic process [9]. Among the biomasses studied, the coffee husk presented the highest moisture content ( $\approx 8\%$ ), which can make the ignition poorer and delay the volatiles release [27]. This moisture can also result in capacity of water vapor formation inside the furnace, via radiation heat transfer, which contributes strongly to the decrease in temperature [22]. It is interesting to note that of all the biomasses of this study, for the N<sub>2</sub> atmosphere the coffee husk samples presented the lowest initial temperatures ( $\approx 948$  °C).

The temperatures variations inside DTF for the rice husk samples for the various thermochemical processes are presented in Figure 5. The behaviors from thermal profiles presented for this biomass are similar to other biomasses and already were mentioned previously (pyrolysis condition). However, it is convenient to highlight that all oxidizing atmospheres had large fluctuations between 100 and 600 s. This time interval can be considered as a region inside DTF of effective combustion, with maximum temperatures of approximately 950 to 970 °C, whose were registered by both thermocouples.

For the *tucumã* seed, temperature variations inside DTF for the different atmospheres are presented in Figure 6. Among the oxidizing atmospheres, the higher effects in temperature gradients were observed for the 60% CO<sub>2</sub> condition, probably provoked by increase in O<sub>2</sub> concentration and, consequently, fast elimination of volatile materials [18,28]. These large fluctuations occurred in a short period time (between 50 and 200 s), with maximum temperatures from 950 and 970 °C. This temperature abrupt variation for the combustion process of this biomass was confirmed by bottom thermocouple and, indicates that combustion process was completed in the inferior part DTF (residues collection region). Other possible justification for this phenomenon can be that in the delimited region for this thermocouple, the biomass particles were still incandescent [29]. For the 100% N<sub>2</sub> environment was observed a decrease in the temperatures ( $\approx 945$  °C) close a 100 s, sample moisture or oiliness can be responsible for such situation [30], after this a behavior considered homogeneous was verified.

According to Toftegaard *et al.* (2010) [31], in high partial pressures and temperatures the CO<sub>2</sub> can be dissociated in CO and O<sub>2</sub>, by means of strongly endothermic reactions. For our specific case, in the reactor flame zone under oxy-fuel combustion processes, only one condition can be observed, *i.e.*, high temperature ( $> 950$  °C) and such information was verified and confirmed in a previous study developed by our research group [18]. However,

in specific of the CO<sub>2</sub> gas, their high partial pressure is an inherent characteristic [31]. The biomass burning process carried out in a combustion chamber closed hermetically, in which CO<sub>2</sub> gas is directly injected, it was observed shocks between the molecules gas and biomasses, the internal system pressure can be further increased.

#### 4. CONCLUSIONS

This research aimed to investigate the thermal behavior inside the combustion chamber of a Drop Tube Furnace (DTF) for the different thermoconversion processes (conventional combustion, pyrolysis and two typical oxy-fuel combustion atmospheres), when five *in natura* Brazilian biomasses (pine sawdust, sugarcane bagasse, coffee and rice husk, and *tucumã* seed) are employed.

Results showed that for the different biomasses and atmospheres, it was possible observe a trend in the internal temperature variations and residence times measured by two thermocouples inside the DTF, which can be related to biomass feeding system, furnace operation conditions, large fluctuations of maximum temperatures, higher and faster volatiles release, O<sub>2</sub> and CO<sub>2</sub> concentrations and heat transfer inside DTF, such parameters can indicate the effectiveness of the thermal process in a DTF.

Our insights can assist in the projects elaboration of new thermochemical conversion systems in lab-scale or same industrial for the biomasses burning or other materials with purpose bioenergy generation, which can help in the Planet construction with an eco-friendly and environmentally conscience.

**Disclaimer:** - This manuscript was presented in a Conference.

**Conference name** 17th Brazilian Congress of Thermal Sciences and Engineering

**November 25th-28th, 2018, Águas de Lindóia, SP, Brazil**

**Available link:** -

[https://www.researchgate.net/profile/Glauber\\_Cruz/publication/331699956\\_TEMPERATURE\\_PROFILES\\_INSIDE\\_THE\\_COMBUSTION\\_CHAMBER\\_OF\\_A\\_DROP\\_TUBE\\_FURNACE\\_DTF\\_FOR\\_THE\\_DIFFERENT\\_THERMAL\\_PROCESSES\\_AND\\_BIOMASSES/links/5c886500a6fdcc38174f9dd8/TEMPERATURE-PROFILES-INSIDE-THE-COMBUSTION-CHAMBER-OF-A-DROP-TUBE-FURNACE-DTF-FOR-THE-DIFFERENT-THERMAL-PROCESSES-AND-BIOMASSES.pdf?origin=publication\\_detail](https://www.researchgate.net/profile/Glauber_Cruz/publication/331699956_TEMPERATURE_PROFILES_INSIDE_THE_COMBUSTION_CHAMBER_OF_A_DROP_TUBE_FURNACE_DTF_FOR_THE_DIFFERENT_THERMAL_PROCESSES_AND_BIOMASSES/links/5c886500a6fdcc38174f9dd8/TEMPERATURE-PROFILES-INSIDE-THE-COMBUSTION-CHAMBER-OF-A-DROP-TUBE-FURNACE-DTF-FOR-THE-DIFFERENT-THERMAL-PROCESSES-AND-BIOMASSES.pdf?origin=publication_detail)



## 5. REFERENCES

- [1] National Energy Balance (NEB), Final Report of the National Energy Balance (2017). Available: <<http://www.ben.epe.gov.br>>. Access: 15 jan. 2019.
- [2] Cruz G., Crnkovic P.M., Evaluation of the combustion process of coffee husk samples in a Drop Tube Furnace (DTF), *Therm Eng* 14 (2015) 55-64. doi.org/10.5380/reterm.v14i2.62135.
- [3] Saidur R., Abdelaziz E.A., Demirbas A., Hossain M.S., Mekhilef S., A review on biomass as a fuel for boilers, *Renew Sust Energy Rev* 15 (2011) 2262-2289. doi.org/10.1016/j.rser.2011.02.015.
- [4] Williams A., Jones J.M., Ma L., Pourkashanian M., Pollutants from the combustion of solid biomass fuels, *Prog Energy Comb Sci* 38 (2012) 113-137. doi.org/10.1016/j.pecs.2011.10.001.
- [5] Babu B.V., Biomass pyrolysis: a state-of-the-art review, *Biof Biop Bior* 2 (2008) 393-414. doi.org/10.1002/bbb.92.
- [6] Poletto M., Zattera A.J., Santana R.M.C., Thermal decomposition of wood: kinetics and degradation mechanisms, *Biores Technol* 126 (2012) 7-12. doi.org/10.1016/j.biortech.2012.08.133.
- [7] Sanchez-Silva L., López-González D., Villaseñor J., Sánchez P., Valverde J.L., Thermogravimetric-mass spectrometric analysis of lignocellulosic and marine biomass pyrolysis, *Biores Technol* 109 (2012) 163-172. doi.org/10.1016/j.biortech.2012.01.001.
- [8] Saddawi A., Jones J.M., Williams A., Wójtowicz M.A., Kinetics of the thermal decomposition of biomass, *Energy Fuel* 24 (2010) 1274-1282. doi.org/10.1021/ef900933k.
- [9] Yang H., Yan R., Chen H., Lee D.H., Zheng C., Characteristics of hemicellulose, cellulose and lignin pyrolysis, *Fuel* 86 (2007) 1781-1788. doi.org/10.1016/j.fuel.2006.12.013.
- [10] Leroy V., Cancellieri D., Leoni D., Chemical and thermal analysis of lingocellulosic fuels, *Forest Ecol Manag* 234S (2006) S125. doi.org/10.1016/j.foreco.2006.08.166.
- [11] Adams J.B.R., Davis K.A., Heap M.P., Sarofim A.F., Eltringham, G.A. and Shock, A.A., Application of reacting CFD model to drop tube kinetics and flash smelter combustion, In *Proceedings of the 4th International Conference Copper - COPPER* (1999), Phoenix, USA.

- 296 [12] Meesri C., Moghtaderi B., Experimental and numerical analysis of sawdust-char  
297 combustion reactivity in a drop tube reactor, Comb Sci Technol 175 (2003) 793-823.  
298 doi.org/10.1080/00102200302392.
- 299 [13] Biagini E., Cioni M., Tognotti L., Development and characterization of a lab-scale  
300 entrained flow reactor for testing biomass fuels, Fuel 84 (2005) 1524-1534.  
301 doi.org/10.1016/j.fuel.2005.02.001.
- 302 [14] Zhang L., Binner E., Qiao Y., Li C.Z., *In situ* diagnostics of Victorian brown coal  
303 combustion in O<sub>2</sub>/N<sub>2</sub> and O<sub>2</sub>/CO<sub>2</sub> mixtures in Drop Tube Furnace, Fuel 89 (2010) 2703-  
304 2712. doi.org/10.1016/j.fuel.2010.04.020.
- 305 [15] Haykiri-Açma H., Baykan A., Yaman S., Kucukbayrak, S., Are medium range  
306 temperatures in a drop tube furnace really ineffective?, Fuel 105 (2013) 338-344.  
307 doi.org/10.1016/j.fuel.2012.05.008.
- 308 [16] Wang G., Silva R.B., Azevedo J.L.T., Martins-Dias S., Costa M., Evaluation of the  
309 combustion behavior and ash characteristics of biomass waste derived fuels, pine and  
310 coal in a drop tube furnace, Fuel 117 (2014) 809-824. doi.org/10.1016/j.fuel.2013.09.080.
- 311 [17] Álvarez L., Yin C., Riaza J., Pevida C., Pis J.J., Rubiera F., Biomass co-firing under  
312 oxy-fuel conditions: a computational fluid dynamics modeling study and experimental  
313 validation, Fuel Proc Technol 120 (2014) 22-33. doi.org/10.1016/j.fuproc.2013.12.005.
- 314 [18] Cruz G., Physical-chemical characteristics of lignocellulosic biomasses and correlation  
315 between their emissions and residues generated under different atmospheric conditions in  
316 a Drop Tube Furnace (DTF), Ph.D. Thesis (2015), Engineering School of São Carlos,  
317 University of São Paulo, São Carlos (SP) - Brazil.
- 318 [19] ASTM D2013-72, Standard method of preparing coal samples for analysis, American  
319 Society for Testing and Materials (1972) 320-334.
- 320 [20] Molina A., Shaddix C.R., Ignition and devolatilization of pulverized bituminous coal  
321 particles during oxygen/carbon dioxide coal combustion, Proc Comb Inst 31 (2007)  
322 1905-1912. doi.org/10.1016/j.proci.2006.08.102.
- 323 [21] Fang M.X., Shen D.K., Li Y.X., Yu C.J., Luo Z.Y., Cen K.F., Kinetic study on  
324 pyrolysis and combustion of wood under different oxygen concentrations by using TG-  
325 FTIR analysis, J Anal App Pyrol 77 (2006) 22-27. doi.org/10.1016/j.jaap.2005.12.010.
- 326 [22] Riaza J., Álvarez L., Gil M.V., Pevida C., Pis J.J., Rubiera F., Effect of oxy-fuel  
327 combustion with steam addition on coal ignition and burnout in an entrained flow reactor,  
328 Energy 36 (2011) 5314-5319. doi.org/10.1016/j.energy.2011.06.039.

- 329 [23] Sun S., Tian H., ZhaoY., Sun R., Zhou H., Experimental and numerical study of  
330 biomass flash pyrolysis in an entrained flow reactor, *Biores Technol* 101 (2010) 3678-  
331 3684. doi.org/10.1016/j.biortech.2009.12.092.
- 332 [24] Zhang J., Yuan Z.W., WEI, X.L., An automatic shake mechanism for the biomass  
333 pyrolysis feeding system, *Powder Technol* 207 (2011) 348-352.  
334 doi.org/10.1016/j.powtec.2010.11.018.
- 335 [25] Gabra M., Pettersson E., Backman R., Kjellström B., Evaluation of cyclone gasifier  
336 performance for gasification of sugar cane residue - Part 1: gasification of bagasse, *Biom*  
337 *Bioen* 21 (2001) 351-369. doi.org/10.1016/S0961-9534(01)00043-5.
- 338 [26] Zhao W., Li Z., Wang D., Zhu Q., Sun R., Meng B., Zhao G., Combustion  
339 characteristics of different parts of corn straw and NO formation in a fixed bed, *Biores*  
340 *Technol* 99 (2008) 2956-2963. doi.org/10.1016/j.biortech.2007.06.030.
- 341 [27] Saenger M., Hartge E.U., Werther J., Ogada T., Siagi Z., Combustion of coffee husks.  
342 *Renew Energy* 23 (2001) 103-121. doi.org/10.1016/S0960-1481(00)00106-3.
- 343 [28] Wang G., Zander R., Costa M., Oxy-fuel combustion characteristics of pulverized-coal  
344 in a drop tube furnace, *Fuel* 115 (2014) 452-460. doi.org/10.1016/j.fuel.2013.07.063.
- 345 [29] Lacava P.T., Carvalho Junior J.A., Pimenta A.P., Ferreira M.A., Thermal analysis of an  
346 enriched flame incinerator for aqueous residues, *Energy* 31 (2006) 528-545.  
347 doi.org/10.1016/j.energy.2005.04.003.
- 348 [30] Virmond E., De Sena R.F., Albrecht W., Althoff C.A., Moreira R.F.P.M., José H.J.,  
349 Characterisation of agroindustrial solid residues as biofuels and potential application in  
350 thermochemical processes, *Waste Manag* 32 (2012) 1952-1961.  
351 doi.org/10.1016/j.wasman.2012.05.014.
- 352 [31] Toftegaard M.B., Brix J., Jensen P.A., Glarborg P., Jensen A.D., Oxy-fuel combustion  
353 of solid fuels, *Progress Energy Combust Sci* 36 (2010) 581-625.  
354 doi.org/10.1016/j.peccs.2010.02.001.

356 **Figures Legends**

357

358 **Figure 1.** Schematic representation of the Drop Tube Furnace (DTF) and feeding system for  
359 the biomasses combustion.

360

361 **Figure 2.** Temperature average profiles inside of the DTF combustion chamber for the **pine**  
362 **sawdust** samples in different thermal conversion processes.

363

364 **Figure 3.** Temperature average profiles inside of the DTF combustion chamber for the  
365 **sugarcane bagasse** samples in different thermal conversion processes.

366

367 **Figure 4.** Temperature average profiles inside of the DTF combustion chamber for the  
368 **coffee husk** samples in different thermal conversion processes.

369

370 **Figure 5.** Temperature average profiles inside of the DTF combustion chamber for the **rice**  
371 **husk** samples in different thermal conversion processes


372

373 **Figure 6.** Temperature average profiles inside of the DTF combustion chamber for the  
374 **tucumã seed** samples in different thermal conversion processes.

375

376 **Figure 1**

377

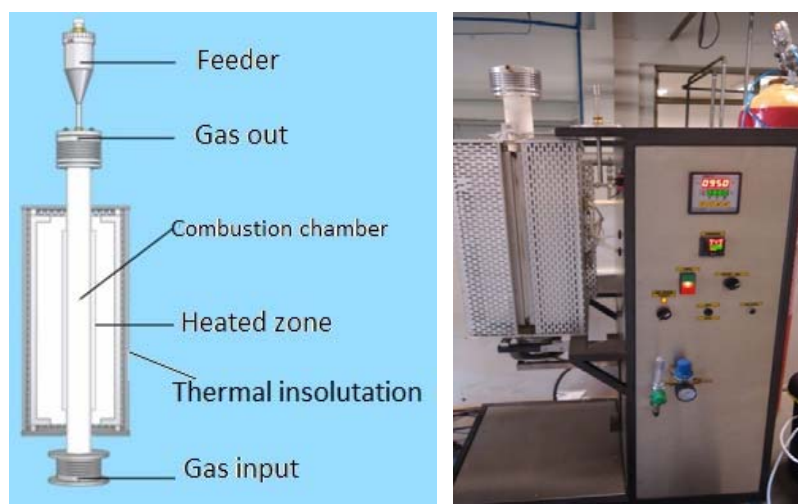


378

379

380 **Figure 2**

381

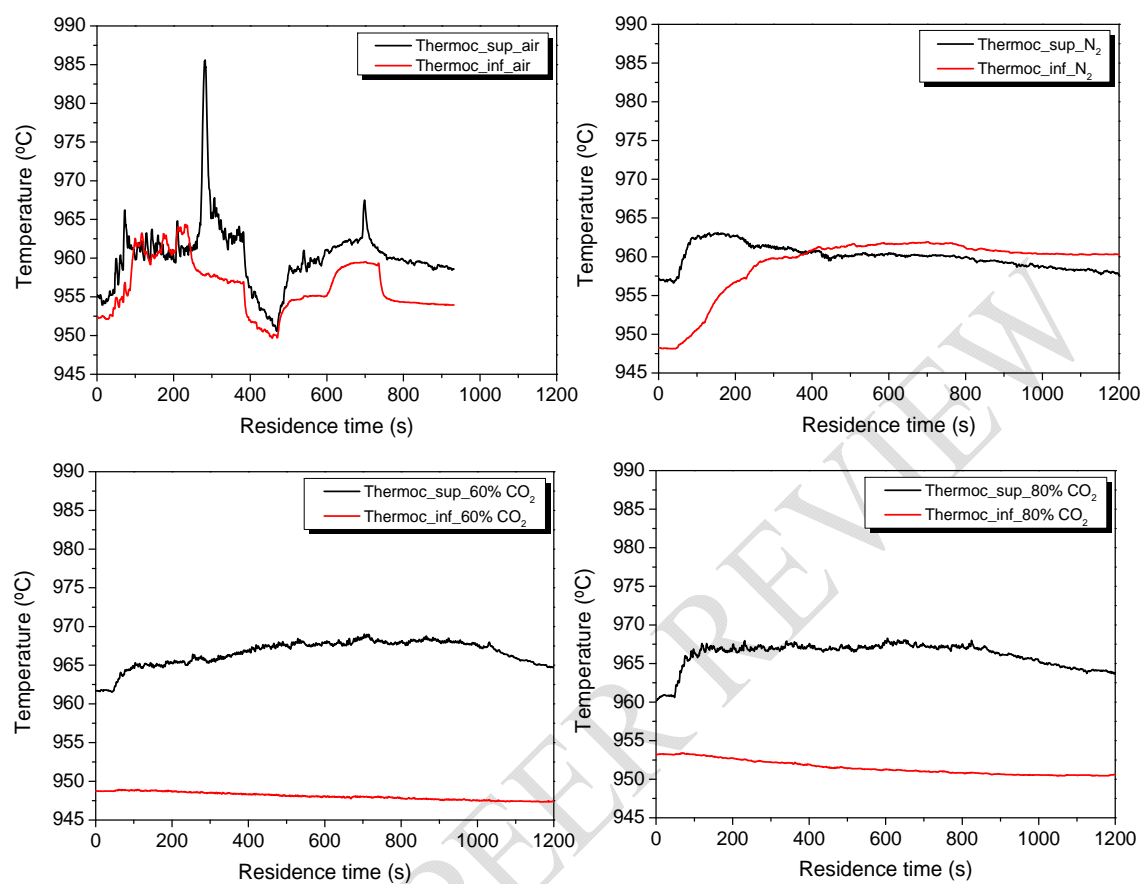


382

383

384 **Figure 3**

385

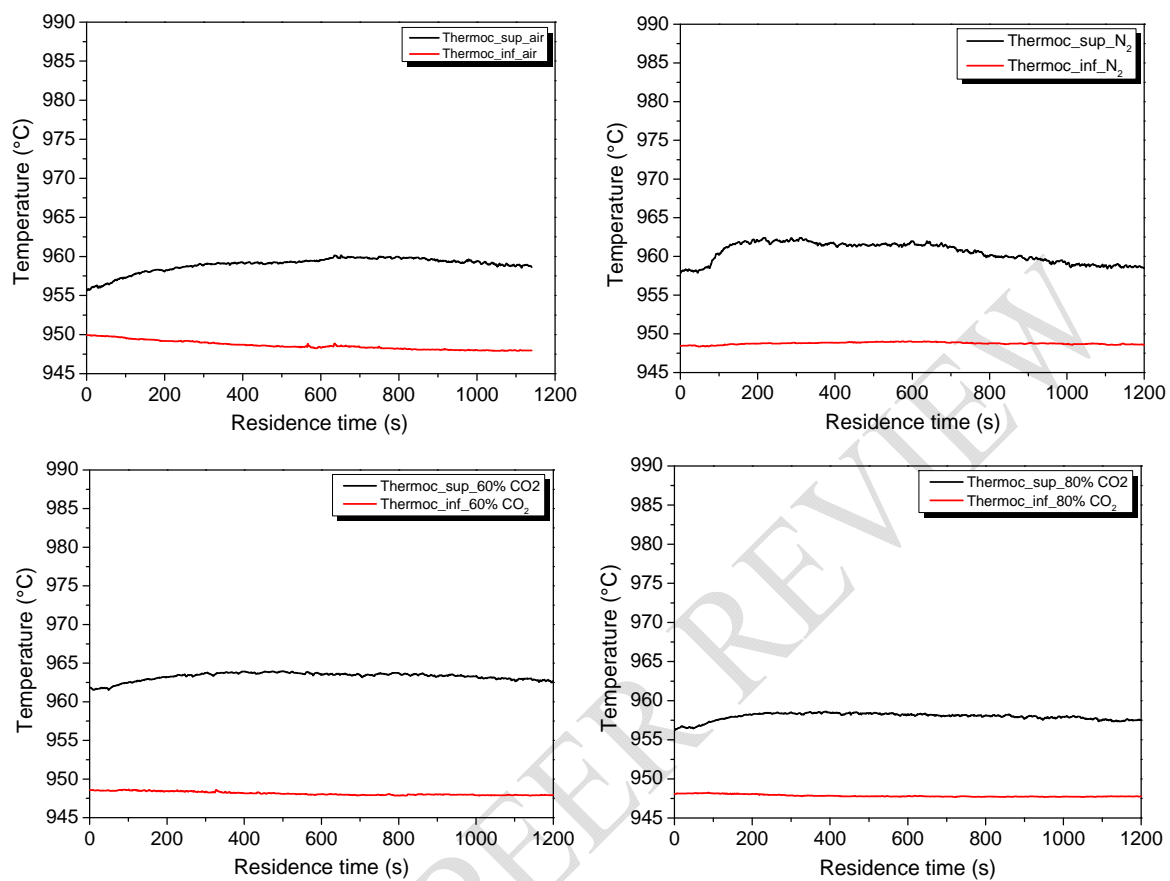


386

387

388 **Figure 4**

389

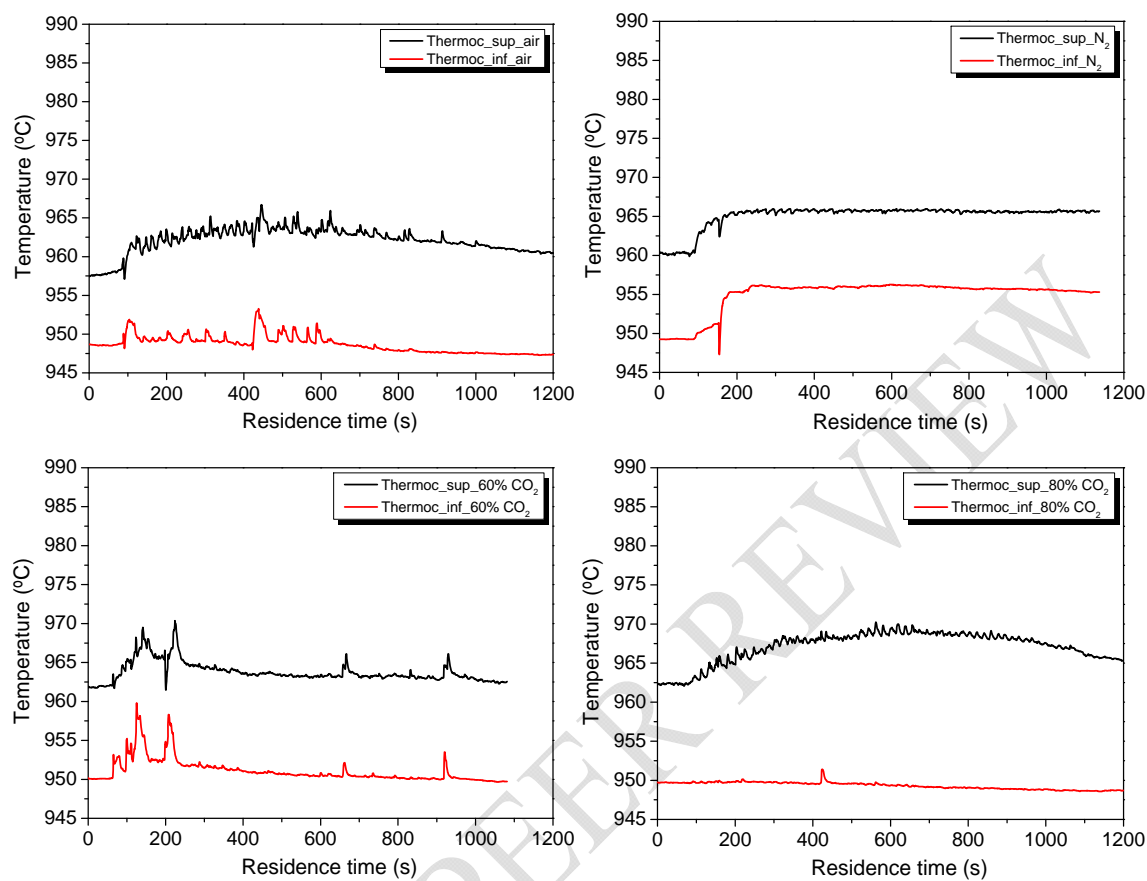


390

391



392 **Figure 5**

393

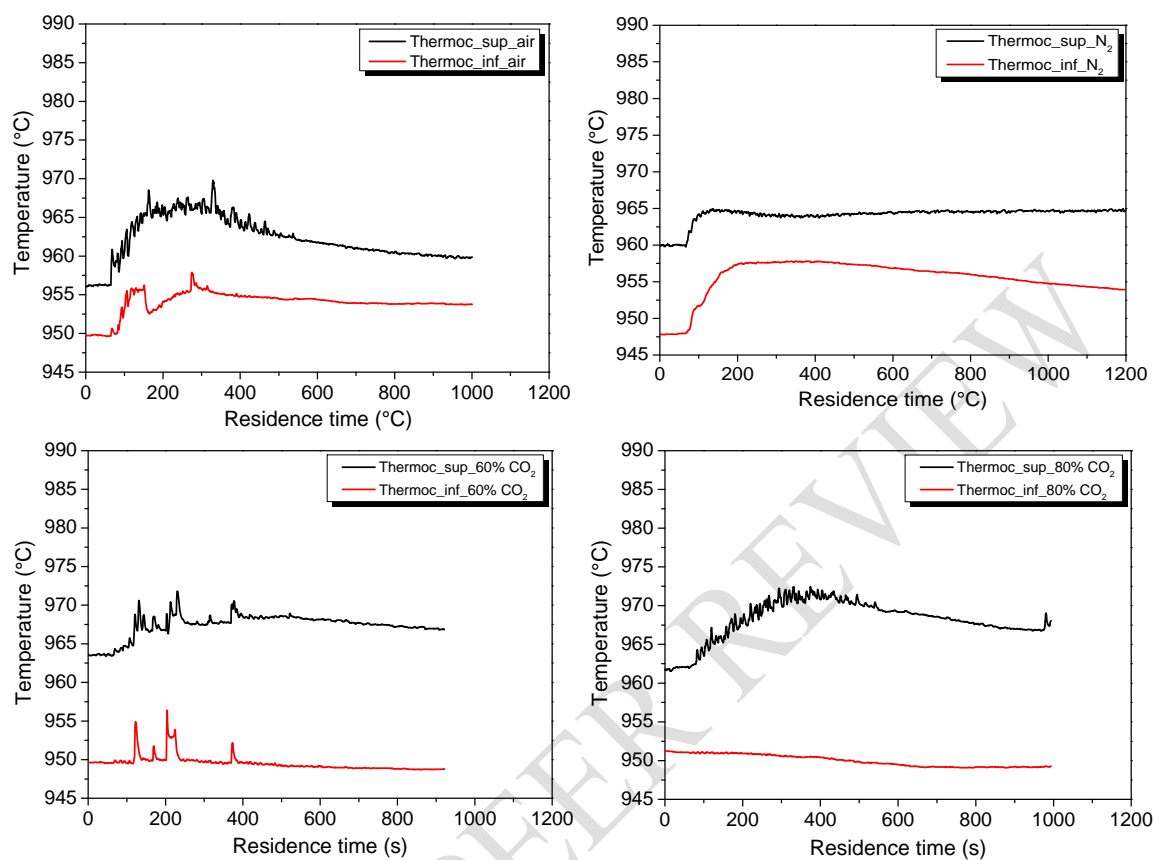


394

395

396 **Figure 6**

397

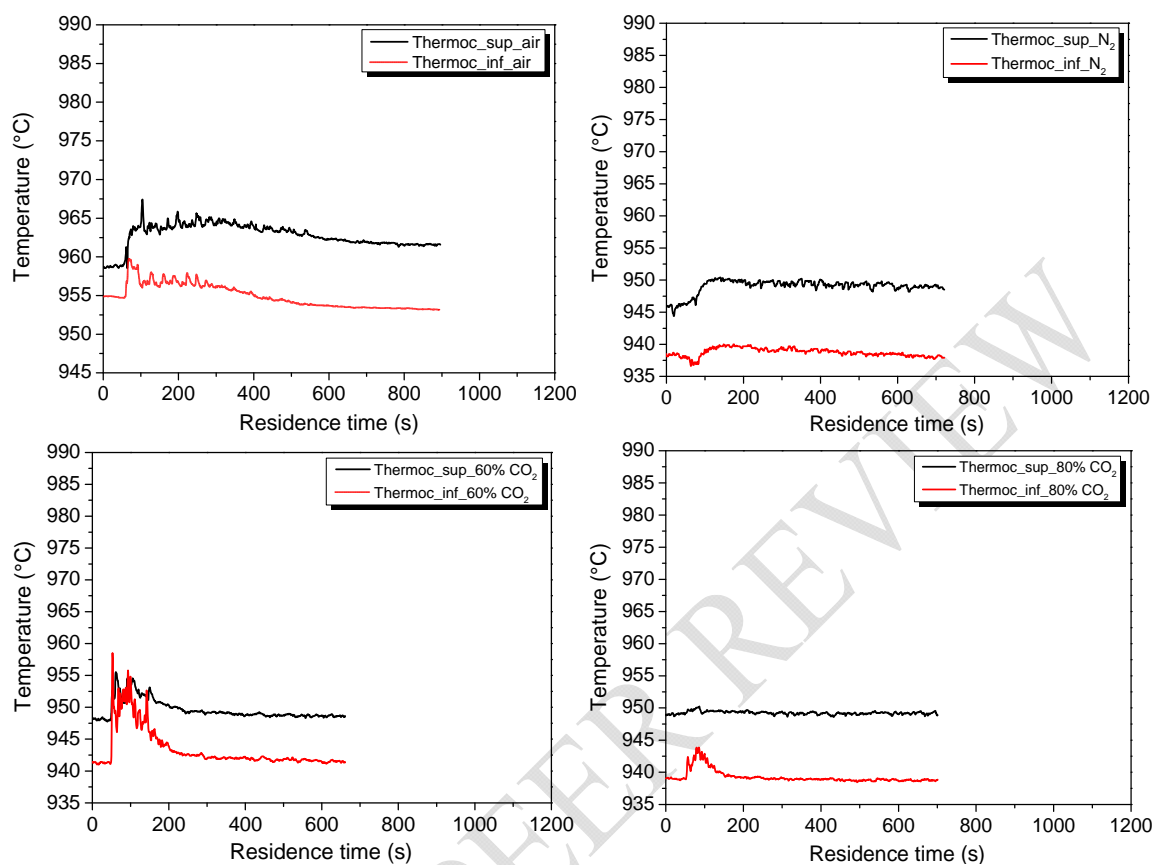

398

399