

Original Research Article

EVALUATION OF UNIFORMITY COEFFICIENT AND SOIL MOISTURE DISTRIBUTION UNDER DRIP IRRIGATION SYSTEM

ABSTRACT

Drip irrigation system uniformity can preserve a higher crop yield and deplete the initial investment of cost. The experiment was conducted at precision farming development centre research farm, Tamil Nadu Agricultural University, Coimbatore, to evaluate the uniformity coefficient and soil moisture distribution under drip irrigation system. The experiment was designed under Factorial Randomized Block Design (FRBD) with the treatments. The experiment was designed under Factorial Randomized Block Design (FRBD) which included three fertigation levels 80 %, 100 % and 120 % of Recommended Dose of fertilizers which were replicated thrice. The Coefficient of ~~variation~~ Variation (CvCV) was obtained as 0.0207 per cent kept at a constant pressure of 50.66 kPa, Statistical Uniformity (SU) as 97 per cent and Coefficient of Uniformity (CU) as 0.9518. As the elapsed time increased, the rate of increase of wetted zone diameter decreased. A high R^2 value of 0.97 shows the goodness of fit for the horizontal movement. The mean soil moisture distribution 39.2 per cent was observed below the emitter at the depth of 10 cm immediately after irrigation.

Keywords: *Coefficient of variation, Drip irrigation, Soil moisture distribution, Uniformity coefficient.*

1. INTRODUCTION

In India, the irrigated area consists of about 36 per cent of the net sown area. Presently the agricultural sector accounts for about 83 per cent of all water uses. Increasing competition with the other water users in the future would limit the water availability for expanding irrigated area. In 2025, 33 per cent of India's population will live under absolute water scarcity condition [4]. Drip irrigation involves supplying water to the soil very close to the plants at very low flow rates (0.5 to 10 lph) from a plastic pipe fitted with outlets (drip emitters). The basic concept underlying the drip irrigation method is to maintain a wet bulb of soil in which plant roots suck water. The soil moisture is kept at an optimum level with frequent irrigations. Drip irrigation results in a very ~~high water~~ high-water application efficiency of about 90 to 95 per cent. This may be as low as 30 per cent of the volume of soil wetted by other methods. The wetting pattern varies with the emitter and soil type. The wetting patterns during application generally consist of two zones: (i) a saturated zone close to the drippers and (ii) a zone where the water content decreases toward the wetting front [1]. Increasing the discharge rate generally results in an increase in the wetted soil diameter and a decrease in the wetted depth. Hence the present study had been proposed to fulfill the following objectives are

1. To evaluate the uniformity coefficient under drip irrigation system in Chilli.
2. To study the soil moisture distribution pattern in drip irrigation system.

Coefficient of uniformity and soil moisture distribution pattern can be achieved by following objectives.

Introduction is very short.

Formatted: Font: Bold, Highlight

Please, add more references. its better to add newest references from 2002 to 2019

Formatted: Font: Bold

2. MATERIALS AND METHODS

The experiment was laid out during 2013 to 2014 under irrigated condition, to evaluate the uniformity coefficient and soil moisture distribution under drip irrigation system on sandy clay loam soil, at Precision Farming Development Centre Research Farm, Tamil Nadu Agricultural University, Coimbatore. The soil type of experimental site was sandy clay loam texture at a pH 8.07 of with good electrical conductivity of 0.78dS m^{-1} .

Must be add soil physical analysis, it's very important in this study

Formatted: Font: Bold, Highlight

Formatted: Font: Bold

2.1 EXPERIMENT LAYOUT

The experiment was carried out in the open field of PFDC Research Farm. The field layout plan for the experiment is shown in Figure 1. The length and width of the field is 15 m and 15 m respectively. The total area is divided into various strips of 4.5 m x 1.2 m according to the treatments. The treatment details are given in Table 1. The experiment was designed under Factorial Randomized Block Design (FRBD) with the treatments mulching thickness and fertilizer levels. Each treatment combination is replicated thrice. Two types of plastic mulching films of different thickness and one control without mulch were selected for the study M₁: Black plastic mulch of 25-micron25-micron thickness, M₂: Black plastic mulch of 50 micron thickness and M₃: No mulch (Control). Three levels of fertigation ~~waswere~~ adopted, namely 80 per cent, 100 per cent and 120 per cent of Recommended Dose of N, P and K and are denoted as F₁, F₂ and F₃.

Table 1. Treatment Details

Treatments	Mulching sheet
T ₁ M ₁	Black Plastic mulch of 25 micron thickness with 80 per cent RDF
T ₂ M ₁	Black Plastic mulch of 25 micron thickness with 100 per cent RDF
T ₃ M ₁	Black Plastic mulch of 25 micron thickness with 120 per cent RDF
T ₃ M ₂	Black Plastic mulch of 50 micron thickness with 80 per cent RDF
T ₅ M ₂	Black Plastic mulch of 50 micron thickness with 100 per cent RDF
T ₆ M ₂	Black Plastic mulch of 50 micron thickness with 120 per cent RDF
T ₇ M ₃	No mulch with 80 per cent RDF
T ₈ M ₃	No mulch with 100 per cent RDF
T ₉ M ₃	No mulch with 120 per cent RDF

2.2 IRRIGATION SCHEDULING

Irrigations were scheduled on the basis of climatological approach on mulch and control plots. Life saving irrigation was given immediately after transplanting and the field was regularly irrigated continuously for ten days. After the tenth day, subsequent irrigations were scheduled once in three days based on the following formula and applied each time as per the treatment schedule. The K_c values for chilli (COCH1) for different stages are given in the Table 2.

$$WR_c = CPE \times K_p \times K_c \times W_p \times A \dots\dots\dots (1)$$

Where,

- WR_c - Computed water requirement (litre plant⁻¹)
- CPE - Cumulative pan evaporation for three days (mm)
- K_p - Pan factor (0.8)
- K_c - Crop factor
- W_p - Wetted fraction (0.8)
- A - Area per plant, m²

$$\text{Time of operation} = \frac{\text{Volume of water required} \times \text{Irrigation interval}}{\text{Emitter discharge}} \dots\dots\dots (2)$$

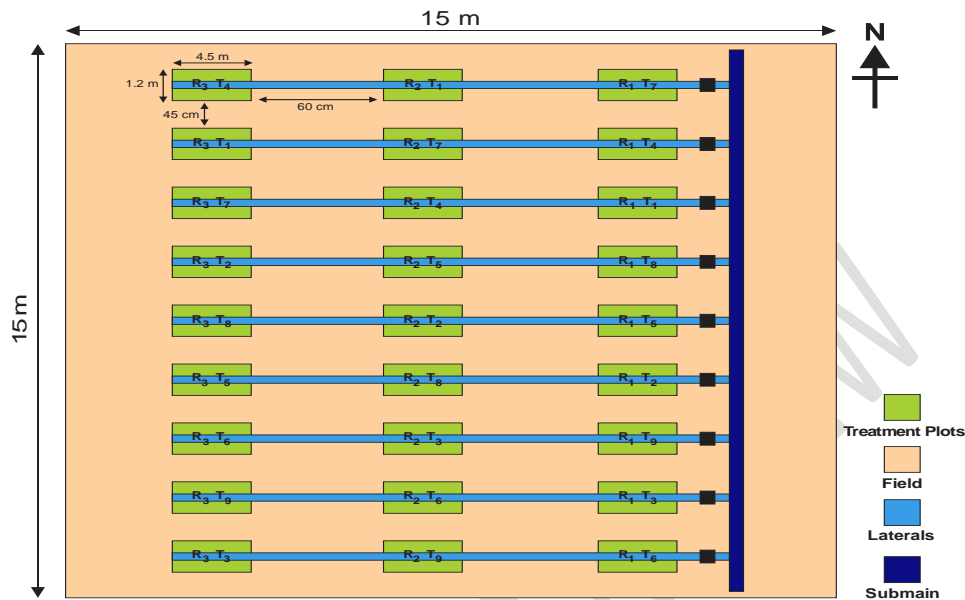


Fig. 1. Field layout of experiment plot

Table 2. Crop factor (K_c) values for chilli (COCH1)

Crop	Days	K_c
Initial stage	15-30	0.6
Flowering stage	30 - 60	0.7
Fruiting stage	60 - 90	0.8
Late season stage	90 -120	1.0

2.3 COEFFICIENT OF VARIATION (CV)

Coefficient of manufacturing variation was determined for the drip irrigation system from flow rate measurements of several identical emission devices and was computed with the following equation given by

$$Cv = \frac{\left[q_1^2 + q_2^2 + q_3^2 + \dots + q_n^2 - n\bar{q}^2 \right]^{1/2}}{\bar{q}[n-1]^{1/2}} \quad \dots\dots\dots (3)$$

Where,

- q_1, q_2, q_3 & q_n . Discharges from different segments
- \bar{q} - Average discharge for the total segments
- n - No. of segments

87 **2.4 STATISTICAL UNIFORMITY**

88 The statistical uniformity is obtained as (ASAE, 1993b)

89 $SU = 100 (1 - Cv)$ (4)

90 Where,

- 91 SU - Statistical Uniformity
92 Cv - Coefficient of variation

93
94 **2.5 COEFFICIENT OF UNIFORMITY**

95 The discharge rate of drippers was recorded at randomly selected emitter points on 1st, 5th, 10th and 15th
96 and last one on each lateral to work out the uniformity of drip system as per the procedure given by [].
97 The uniformity co-efficient was computed by the following formula

98 $E_u = 100 \left[1 - \frac{1.27}{\sqrt{Ne}} Cv \right] \frac{Q_{min}}{Q_{avg}}$ (5)

99 Where,

- 100 Eu - Emission uniformity in percent,
101 Ne - Number of point source segments
102 Cv - The manufacture's coefficient rate in the system, lph
103 Q_{min} - The minimum discharge rate, lph
104 Q_{avg} - The average rate of discharge, lph
105

106 **2.5 SOIL MOISTURE DISTRIBUTION PATTERN**

107 The wetting pattern of soil under different mulches was analyzed by taking moisture content at different
108 horizontal distances and depths. In order to study the soil moisture distribution in soil, samples were
109 collected at a distance at 0, 15, 30, and 45 cm from emitter along the horizontal direction at surface and
110 at a depth of 0, 10, 20, and 30 cm. The samples were collected before irrigation, immediately after
111 irrigation, one day after irrigation and two day after irrigation. Using gravimetric ~~method~~method, the soil
112 moisture measurements were calculated. The soil moisture content is expressed as per cent by weight on
113 dry basis. Soil moisture contour maps were plotted by using the computer software package 'Surfer' of
114 windows version.

115 **2.7 WETTED ZONE DIAMETER**

116 Field observations were taken to measure the horizontal movement of wetting front over the surface of
117 the field. The diameter of the wetting front was measured over different periods of time during emission
118 and the wetting front advance equation was developed.

119 **3. RESULTS AND DISCUSSION**

120 The results of the experimental findings obtained have been discussed in following heads.

121

122 **3.1 IRRIGATION SCHEDULING**

123 The quantity of water applied per plant for chilli is given in table 3.

124 **Table 3. Quantity of water applied per plant for chilli**

Crop Date	Quantity applied per plant (lpd)	Duration of irrigation (min) each day	Total quantity (l) applied per plant per stage
Initial Stage (Sep 25 to Oct 14) 1-20 days	0.427	20	1.281
Vegetative stage (Oct 15 to Nov 09) 21 - 45 days	0.223	10	0.669
Fruit setting stage (Nov 10 to Dec 24) 46 - 90 days	0.583	27	6.996
Final stage (Dec 25 to Jan 23) 91 - 120 days	1.078	48	10.78

125

126 3.2 DISCHARGE UNIFORMITY ASSESSMENT

127

128 The efficiency of drip irrigation depends on the uniformity of distribution of water throughout the field area. The
129 discharge from the drippers at different points of emission was measured for a particular [period of time](#)
130 at 50.66 kPa pressure and parameters such as Coefficient of variation ([Cv](#)), Statistical Uniformity (SU) and
131 Coefficient of Uniformity (CU) were evaluated from the observed discharge. Volumetric method was used to
132 calculate the Coefficient of uniformity of drip irrigation system.

133

134 3.3 COEFFICIENT OF VARIATION AND STATISTICAL UNIFORMITY

135 The Coefficient of manufacturing Variation ([Cv](#)) for drip irrigation system is calculated for the pressure
136 of 50.66 kPa as 0.0207 per cent and Statistical Uniformity of the system was calculated as 97 per cent.

137 3.4 COEFFICIENT OF UNIFORMITY

138

139 The Uniformity Coefficient of the drip irrigation system was found to be
140 0.9518. The high value of Uniformity Coefficient indicated the excellent performance of drip irrigation system in
141 supplying water uniformly throughout the laterals.

142

143 3.5 WETTED ZONE DIAMETER

144

145 The diameter of the horizontal wetted zone during different durations of emission is graphically represented in
146 Fig. 2. As the elapsed time increased, the rate of increase of wetted zone diameter decreased. This was due
147 to the increased area for downward movement of water as the lateral wetting increased. A regression equation
148 of type $Y = AX + B$ was fitted to the horizontal advancement for 4 lph emitter in sandy clay loam soil. A high R^2
149 value of 0.97 shows the goodness of fit for the horizontal movement. The equation fitted was $D = 0.151t +$
150 21.63.

151

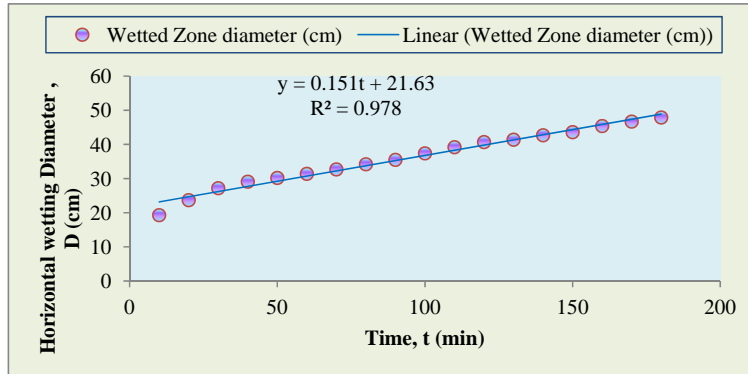


Fig. 2. Diameter of horizontal wetted zone

3.6 SOIL MOISTURE DISTRIBUTION PATTERN

The soil moisture content at different depths, ie, surface, 0 to 10, 10 to 20 and 20 to 30 cm at different distance from the emitter were estimated just before irrigation, immediately after irrigation, one day after irrigation, and two days after irrigation. The mean maximum soil moisture content 39.2 % was observed below the emitter at the depth of 10 cm immediately after irrigation.

The soil moisture contents estimated at different depths and distances from emitter were plotted by using the computer software package "surfer" of windows version and are shown in Fig. 3, Fig. 4, Fig. 5 and Fig. 6.

The reason for higher moisture content in the lower horizons might be due to water stored in soil pores with minimum evaporation loss. Soil moisture content was lesser in the surface layer than in depths at different locations from emitter. This might be due to more evaporation from the soil surface compared to lower layers [3][5][6]. Soil water content was relatively higher by volume near the emitter and it was decreasing as the distance from the emitting point increased [2] [7] [8] [9] [10] [11] [12] and [13].

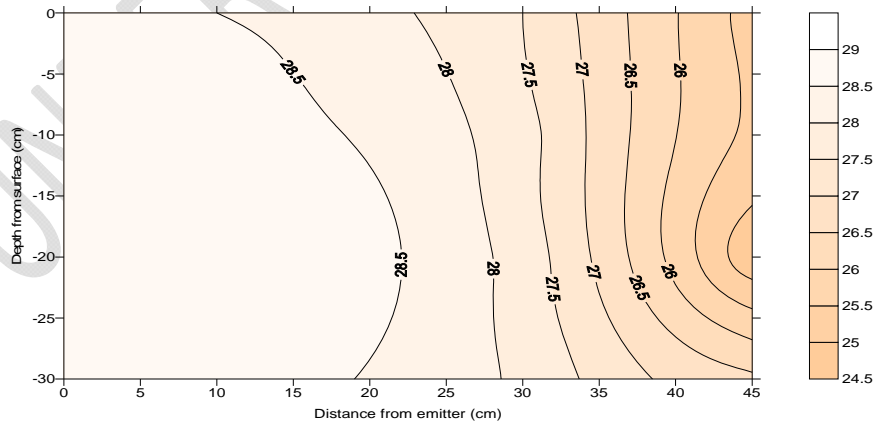


Fig.3. Moisture content before Irrigation

169

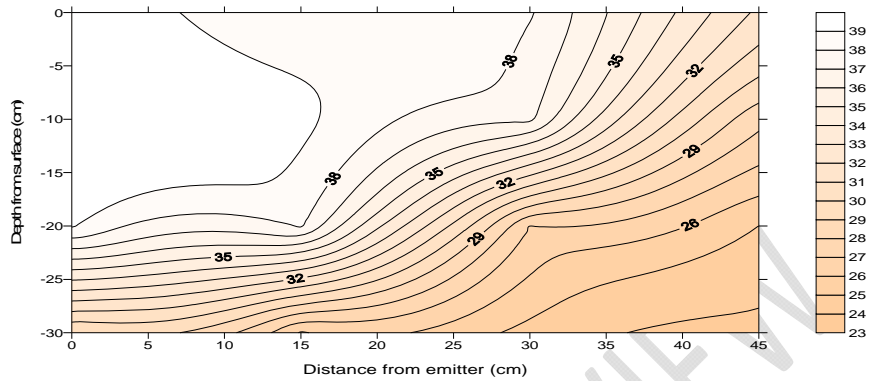


Fig. 4 Moisture content after irrigation

170
171
172

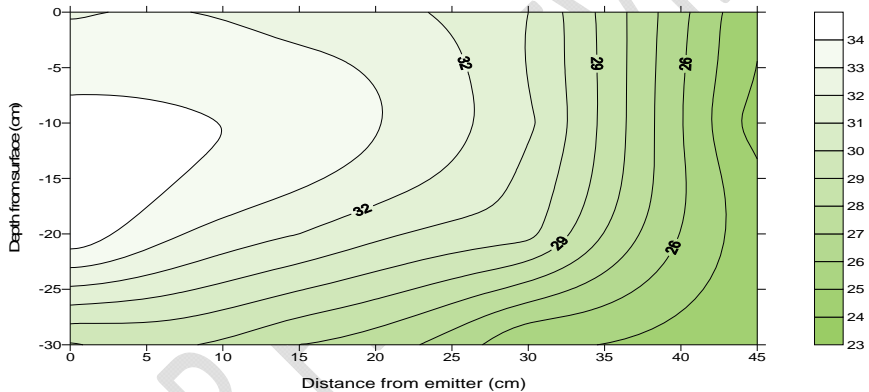


Fig. 5. Moisture content one day after irrigation

173
174
175

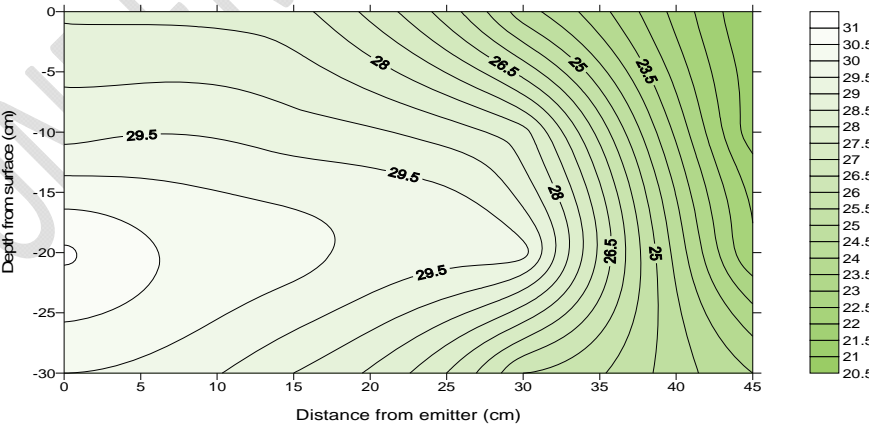


Fig. 6. Moisture content two day after irrigation

176
177
178

179 4. CONCLUSION

180 The Coefficient of variation (C_v/CV) was obtained as 0.0207 per cent kept at a constant pressure
181 of 50.66 kPa, Statistical Uniformity (SU) as 97 per cent and Coefficient of Uniformity (CU) as 0.9518. As
182 the elapsed time increased, the rate of increase of wetted zone diameter decreased. This was due to the
183 increased area for downward movement of water as the lateral wetting increased. A regression equation of
184 type $Y = AX + B$ was fitted to the horizontal advancement for 4 lph emitter in sandy clay loam soil. A high R^2
185 value of 0.97 shows the goodness of fit for the horizontal movement. The equation fitted was $D = 0.151t +$
186 21.63 . The mean maximum soil moisture content 39.2 per cent was observed below the emitter at the
187 depth of 10 cm immediately after irrigation. The soil moisture contents estimated at different depths and
188 distances from emitter were plotted by using the computer software package "surfer" of windows version.

189 COMPETING INTERESTS

190
191 Authors have declared that no competing interests exist.
192

193 REFERENCES

- 194 1. Assouline S. The Effects of micro drip and conventional drip irrigation on water distribution and
195 uptake. Soil Sci. Soc. Am. J., 2002; 66: 1630-1636.
- 196 2. Chakraborty D, Singh A.K, Kumar A, Uppal, K.S. and Khanna M. Effect of fertigation on nitrogen
197 dynamics in Broccoli. Workshop on Micro Irrigation and Sprinkler Irrigation Systems, 28-30 April
198 1998. New Delhi. Proceedings, Central Board of Irrigation and Power. Editors. Varma, C.V.J. and
199 Rao, A.R.G. Malcha Marg, New Delhi 1998. -21.
- 200 3. Kaul, R.K. Hydraulic of moisture front advance in drip irrigation. In proceedings of international
201 congress on the use of plastic in agriculture, New Delhi, 1979; 13: 19 - 27
- 202 4. Mark W, Rosegrant, Cai X, Sarah A and Cline. Global water outlook to 2015. Averting on
203 impending Crises. Food Policy Report, International Water Management Institute, Colombo,
204 Srilanka. 2002; 3p.
- 205 5. Philip, J.R. General theorem on steady infiltration from surface source with application to point and
206 line source. Soil Science society of American Proceedings. 1971; 35: 86871.
- 207 6. Prabhakar M. and Hebbar S.S. Performance of some solanaceous and cucurbitaceous
208 vegetables under micro irrigation system. All India seminar on micro irrigation techniques,
209 Bangalore, 1996; 74 -77
- 210 7. [Mansour, H. A. , M. Abd El-Hady, V. F. Bralts, and B. A. Engel \(2016a\). Performance](#)
211 [automation controller of drip irrigation system and saline water for wheat yield and water](#)
212 [productivity in Egypt. Journal of Irrigation and Drainage Engineering , American Society](#)
213 [of Civil engineering \(ASCE\), J. Irrig. Drain Eng. 05016005,](#)
214 [http://dx.doi.org/10.1061/\(ASCE\)IR.1943-4774.0001042. 142\(10\):1-6](http://dx.doi.org/10.1061/(ASCE)IR.1943-4774.0001042. 142(10):1-6)
- 215 8. [Mansour, H. A., M. Abdel-Hady and Ebtisam I. El-dardiry, and V. F. Bralts \(2015a\).](#)
216 [Performance of automatic control different localized irrigation systems and lateral](#)
217 [lengths for: emitters clogging and maize \(zea mays L.\) growth and yield. Int. J. of](#)
218 [GEOMATE, 9 \(2\): 1545-1552.](#)

- 219 **9. Mansour, H. A., Pibars, S.K., Abd El-Hady, M., and Ebtisam I. Eldardiry, (2014).**
220 Effect of water management by drip irrigation automation controller system on faba bean
221 production under water deficit. International Journal of GEOMATE, 7(2):1047-1053.
222 **10. Mansour, H.A., Pibars, and S.K., Bralts, V.F.(2015b).**The hydraulic evaluation of MTI
223 and DIS as a localized irrigation systems and treated agricultural wastewater for potato
224 growth and water productivity. International Journal of ChemTech Research, 8 (12): 142-
225 150.
226 **11. Mansour, H.A., Saad, A., Ibrahim, A.A.A., El-Hagarey, M.E. (2016c).**Management of
227 irrigation system: Quality performance of Egyptian wheat (Book Chapter). micro irrigation
228 management: technological advances and their applications, Apple Academic Press,
229 Publisher: Taylor and Frances.
230 **12. Mansour, H.A.A. (2015).**Design considerations for closed circuit design of drip irrigation
231 system (book chapter), closed circuit trickle irrigation design: theory and applications,
232 Apple Academic Press, Publisher: Taylor and Frances.
233 **13. Mansour, H.A.A. and El-Melhem, Y. (2015)**Performance of drip irrigated yellow corn:
234 Kingdom of Saudi Arabia (Book Chapter), closed circuit trickle irrigation design: theory
235 and applications, Apple Academic Press, Publisher: Taylor and Frances.