

**CHEMICAL PROCESS ABSORPTION COLUMN DESIGN FOR  
CO<sub>2</sub> SEQUESTRATION**

**Abstract**

The design of a prototype chemical process absorption column was carried out to facilitate the sequestration of CO<sub>2</sub> from flue gas emanating from an exhaust point of a power generating set.

*The subtasks of the entire designing dwelt on are..... and.....The main inputs (determinant parameters and factors), and output solution (s) of the entire designing are. Validation of the output solution (s) of the entire designing is/are..... The usefulness of the solution generate in this study includes.....*

[Factors such as ambient temperature and atmospheric pressure were factored into consideration before the fabrication of the absorption column. The rate of the absorbing liquid is 0.1056kg/min and contains 5% mole/mole carbon (iv) oxide. Also the energy and material balance of the entire sequestration process was **verified done**. Finally the equipment design for the process was carried out] *-move to where fits above.*

**Keyword:** material balance, energy balance, CO<sub>2</sub> sequestration, ammonia, equipment design, absorption column, knockout drum, absorber, evaporative gas cooler, solution cooler, solution heat exchanger, flash drum, stripper, and reboiler.

**1. Introduction**

Plant design is a technical term that embraces all engineering aspects involved in the development of either a new, modified, or expanded industrial plant (Coulson and Richardson, 1968). It involves the **making of** economic evaluations of new processes, design of industrial pieces of equipment for ~~the proposed~~ a new **plant venture** or ~~the~~ developing a plant layout for ~~the~~ co-ordination of the overall operation. The development of a process involves many different steps starting from the inception of the basic idea. The atmospheric concentration of carbon (IV) oxide, i.e., the most critical greenhouse gas, has increased from 280 ppm in the pre-industrial age to more than 370 ppm now, and is expected to increase above 500 ppm by the end of this century, Watson R.T (2001). This is recognized to be due to anthropogenic activities, **especially** ~~particularly burning of~~ fossil fuels burning and land use ~~changes~~, and **associated with the** ~~increasing has been accomplished by a corresponding increase of the~~ earth's average temperature.

36 Present strategies for the mitigation of the atmospheric carbon (IV) oxide build-up are relied on  
37 the improvement the efficiency in enhancing of energy use efficiency, on and the reduction of  
38 fossil fuels consumption for increased and on using of renewable energy sources or nuclear  
39 power plants. However, the continuing increasing in the world population accompanied together  
40 with concomitant growth in the increasing consumption of energy consumption and growth of  
41 the industrial development in developing countries like china and India has posed a challenge in  
42 the efforts to reduce greenhouse gas emissions. Thus, the inevitable way of keeping to-keep  
43 within this country the overall the global CO<sub>2</sub> load of the in the atmosphere and hydrosphere  
44 below unbearable levels is that of the complementing of emission reduction efforts by techniques  
45 to the capture of CO<sub>2</sub> before it emits from point sources before emission, or to capture it from its  
46 carrying air stream emitting from the point sources after emission, and to store it permanently  
47 outside the atmosphere.

48

## 49 **2. Materials and Methods**

### 50 **2.12 Materials**

51 The materials made up of glass wares were purchased at science apparatus market; they were put  
52 together alongside other components fabricated to make a complete reactor. The equipment has  
53 an absorption column, flask containing the ammonia solution, reservoir to house the content of  
54 the mixture in the aftermath of the reaction, openings for flue gas entrant and exit point after the  
55 reaction, non-heat sensitive pipe connected to the entry point of the absorption column and the  
56 exhaust pipe of the gasoline generating set.

### 57 **2.21 Methodology**

58

59 *Provide a flow diagram of the subtasks dwelt on step by step from the beginning up to the end of the chemical*  
60 *process absorption column designing for CO<sub>2</sub> sequestration accomplished in this study, and a table of their inputs*  
61 *and output here.*



62

63 Due to the nature of the equipment made of glassware and in order to control the experiment,  
64 standard conditions of ambient temperature and atmospheric pressure were adopted for the  
65 process, and also for the flow rate of the solution into the absorption column. Three  
66 parameters/independent variables were used which are concentration of solvent, contact time and  
67 volume of solvent. Due to the nature of the equipment made of glassware and in order to control  
68 the process, standard conditions of ambient temperature and atmospheric pressure were adopted

69 for the process. Three independent variables were used, which are : the concentration of solvent  
70 ranging from 2-10 mol/dm<sup>3</sup>, contact time of ranging from 20-100 seconds, and volume of solvent  
71 between ranging from 40-200 ml.

72 For the carbon sequestration to be achieved, 10 mol/dm<sup>3</sup> concentration of aqueous ammonia was  
73 prepared and poured into a flask containing ammonia solution which supplies the solution to the  
74 absorber, the aqueous ammonia was evenly distributed across the inner surface of the column  
75 while in contact with the plates. The petrol generating set was turned on while the gas analyzer  
76 detected the components and quantity of gases before it being charged into the heat exchanger.  
77 The heat exchanger helped to attain the desired temperature of 40°C before the flue gas was  
78 charged into the absorption column from the entry point near the base of the absorption column.  
79 The flue gas in the column contacted with the aqueous ammonia in a counter current form for a  
80 period of 60 seconds after which the tap at the exit point close to the top of the absorption  
81 column was opened and gas analyzer was used to determine the amount of CO<sub>2</sub> and CO leaving  
82 the column. (provide a sketch diagram of the absorption column to illustrate this- [The chemical solution is  
83 charged into the column from the top and is evenly distributed across the inner surface of the  
84 column while in contact with the plates. Gas enters through an opening at the base of the column,  
85 counter-currently contacting with the liquid as it flows up and reacts with the ammonia solution],  
86 as it is beneficial to make CO<sub>2</sub> and aqueous contact and react vigorously this way.

#### 87 Equation for the reaction:



93 About 98% recovery of CO<sub>2</sub> occurs and the recovery liquid is a 20% w/w NH<sub>3</sub>

#### 94 Assumptions:

- 95 1) The rate of the absorbing liquid is 0.1056kg/min and contains 5% mole/mole carbon  
96 (iv) oxide.
- 97 2) The spent air effluent analysis, 0.000347ft<sup>3</sup>/s at 30°C, 1atm with % composition on  
98 dry basis of carbon (IV) oxide (3.5%), nitrogen (79%) and oxygen (17.5%). The exit  
99 air is saturated with water vapour at the absorbing liquid inlet temperature of 40°C.


- 100 3) Recovery of 85% CO<sub>2</sub>.
- 101 4) Reaction equation *what is the assumption on it?*

102  
 103 **Process Details:**  
 104 Basis: 1 minute operation

105 **Feed Stream**  
 106 Stream 2: Spent air effluent (dry basis)  
 107 CO<sub>2</sub> = 3.5%  
 108 Nitrogen = 79%  
 109 Oxygen = 17.5%  
 110 **Total volume** of spent air effluent = 0.000347Ft<sup>3</sup>/s

112 **3. Results and Discussions**

113

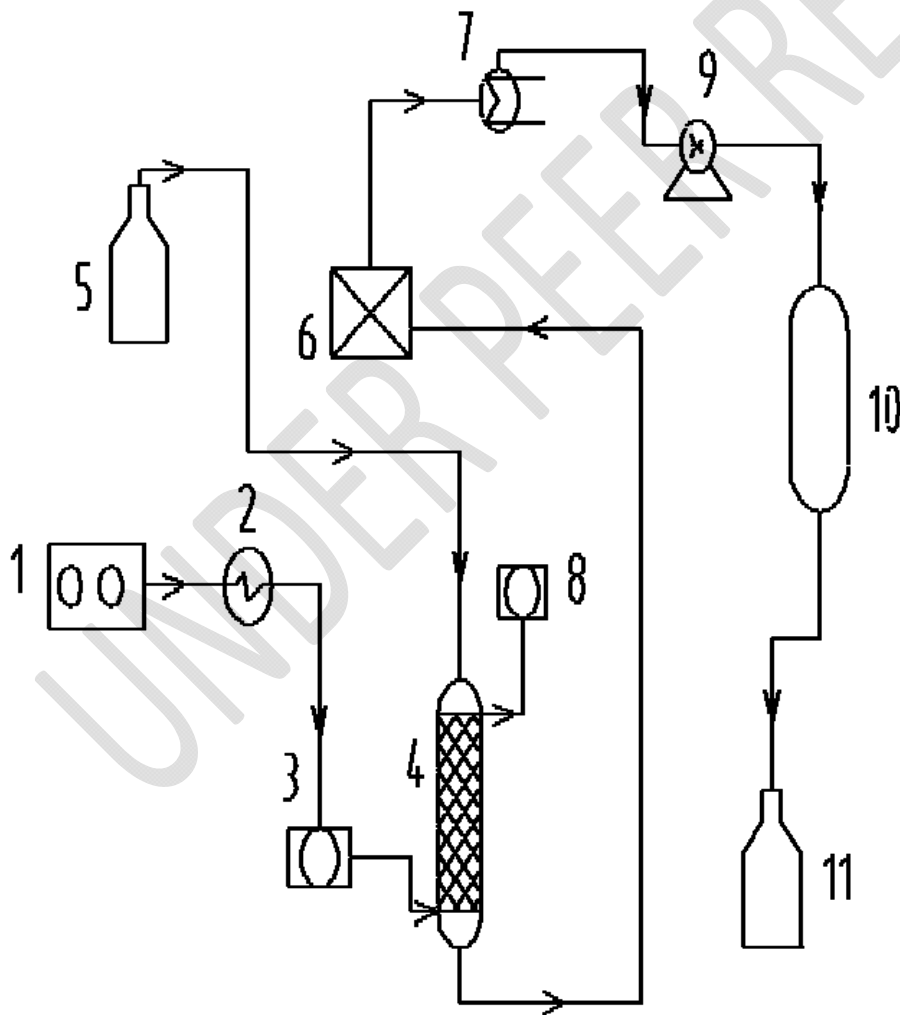

LEGEND	
1	PETROL GENERATING SET
2	PROCESS HEAT EXCHANGER
3	GAS ANALYZER
4	ABSORPTION COLUMN
5	FLASK CONTAINING AQUEOUS AMMONIA
6	WASH SECTION
7	STRIPPER
8	GAS ANALYZER
9	KNOCKOUT DRUM
10	COOLER
11	FLASH DRUM

114

115 Fig.1 Experimental set-up for absorption using the prototype semi-batch column  
116

117 The capturing of CO<sub>2</sub> from spent air effluent was achieved through the absorption of CO<sub>2</sub> with  
118 ammonia solution to form ammonia carbamate which was later regenerated to recover the  
119 ammonia and CO<sub>2</sub>. The raw gas (air effluent from a generating set) was cooled to about 40<sup>0</sup>C  
120 (reaction temp.) and separated to remove any condensed water from the raw gas. Dry air effluent  
121 was charged to the adsorption column. *provide a sketch diagram of the absorber to illustrate this-* [The  
122 absorber is **divided** into two sections]: the absorption **section** and **the** wash sections. In the  
123 absorption section the air was charged counter currently with ammonia solution from the top and  
124 the CO<sub>2</sub> was absorbed to form ammonium carbamate. The off air from absorption section is  
125 water washed in the wash section to remove any entrained liquid. The scrubbed gas recovered as  
126 overhead is sent to the knock-out drum to recover any entrained ammonia solution from the  
127 absorption column. The rich-amine solution from the bottom of the absorber is passed to energy  
128 recovery system and a solution heat exchanger where it is pre-heated to about 150<sup>0</sup>C  
129 (regeneration temperature). The spent ammonia solution exchange heat with incoming  
130 regenerated ammonia solution from bottom of the regenerator. Pre-heated spent ammonia  
131 solution is separated to remove any gas associated with the spent ammonia solution.  
132 Regeneration of ammonia solution is carried out in the regenerator by the application of heat  
133 supplied by steam generated in the reboiler at the base of the regenerator. The top product of  
134 regenerator contains mainly CO<sub>2</sub> and steam which is cooled in the cooler **5?** to condense them.  
135 The steam is separated and returned to the reboiler.

136 The bottom product of regenerator containing regenerated ammonia solution is passed through  
137 solution heat exchanger where it exchanges heat with spent ammonia solution from the absorber.  
138 It is further cooled to bring its temperature to about 40<sup>0</sup>C (absorption temperature).

### 139 3.1 Material Balance Results

#### 140 CALCULATIONS

141 *Provide and describe the formula which applies, followed by the numerical calculation of it for all numerical*  
142 *calculations which follow here.*

143 **To get the volumetric flow rate:**

144  $Volums = \pi r^2 h$

145 The absorption column specifications are:

- 146 - Length of column: 40cm
- 147 - Diameter of column: 5cm
- 148 - Number of plates: 10
- 149 - Distance between plates: 2cm
- 150 - Distance between outlet and plates in the column: 5cm
- 151 - Distance between outlet and bottom of column: 5cm
- 152 - Distance between inlet and plate contact: 5cm

153 
$$\text{Radius} = \frac{\text{Diameter}}{2} = \frac{5}{2} = 2.5\text{cm} (0.025\text{m})$$

154 
$$\text{Volume} = \pi \times 0.025^2 \times 0.4 = 7.8539 \times 10^{-4} \text{m}^3$$

155 Convert to feet: where  $1\text{ft}^3 = 0.0283\text{m}^3$

156 
$$\frac{0.0007845}{0.3048^3} = 0.0277 \text{ft}^3 \times 60 = 1.6642 \text{ft}^3/\text{hr}$$

157 Assuming 75% absorption capacity for CO<sub>2</sub> and converting the calculated values from ft<sup>3</sup>/hr to ft<sup>3</sup>/sec

158 
$$\frac{3}{4} \times \frac{1.6642}{1} = \frac{1.24815}{3600} = 0.0003467 \text{ft}^3/\text{sec}$$

159 **To get the mass flow rate:**

160 **At optimum condition:** Vol. of solvent = 120ml

161 Multiply by the density;  $120 \times 0.88 \times 1\text{gram} = 105.6 \text{g/min} = \mathbf{0.1056 \text{kg/min}}$

162 **Balance around the absorber**


163 CO<sub>2</sub> in F<sub>3</sub> = 0.0000364kg (0.000000827kmol)

164 For 85% recovery, CO<sub>2</sub> scrubbed

165 = 0.85 X CO<sub>2</sub> Fed in F<sub>3</sub> = 0.0000309kg

166 Kmol of CO<sub>2</sub> scrubbed = 0.000000701kmol

167 Reaction equation in Absorber



169 Ammonium carbamate

170 From above equation

171 = (0.000000701 x 2) kmol of CO<sub>2</sub> required (0.000000701 x 2) kmol NH<sub>3</sub>

172 Total mole of liquid consumed

173  $= 0.000001402 + 0.000000701 = 0.000002103 \text{ kmol}$

174 Total mole of absorbing liquid = 0.1056 kmol/min

175 Recovery liquid is a 20% w/w  $\text{NH}_3$

176 Average molecular weight of recovery

177 
$$\text{Liquid} = \frac{20(17)}{100} + \frac{80(18)}{100} = 17.8$$

178 Total mole of recovery liquid

179 
$$= \frac{0.1056}{17.8} = 0.0059 \text{ kmol}$$

180 Mole of  $\text{NH}_3$  in recovery liquid = 0.00118 kmol

181 Mass of Ammonia in recovery liquid = 0.02006 kg/min

182 Kmole of  $\text{H}_2\text{O}$  in recovery liquid = 0.00472 kmol

183 Mass of  $\text{H}_2\text{O}$  in recovery liquid = 0.08496 kg/min

184 Unreacted  $\text{NH}_3$  = 0.00118 kmol

185 Unreacted  $\text{H}_2\text{O}$  = 0.004719 kmol

186 **Balance check**

187 **Flow stream  $F_3$  (kg)**

188 Total  $F_3$  = 0.0006954 kg/min

189 **Flow stream  $F_8$**

190  $\text{CO}_2$  = 0.0000118 kmol x 44 = 0.0005192 kg

191 Total  $F_8$  = 0.02006 + 0.08496 + 0.0005192 = 0.1055 kg/min

192 **Flow stream  $F_4$**

193 Unscrubbed  $\text{CO}_2$  = 0.000484 kg/min

194 From specifications, the exit air is saturated at 40°C.

195 Vapour pressure of water at 40°C, 760 mmHg.

196 
$$\ln p^* w = \frac{A-B}{T+C} = \text{Antlons' s equation}$$

197 Where A, B and C are Antoine's constant, T = Temperature

198  $\rho_w^0 = 232.293 \text{ mmHg}$

199 Mole fraction of water vapour in flow  $F_4$

200 
$$\frac{\text{Vapour pressure of water vapour}}{\text{Total pressure}}$$

201  $\text{Total } F_4 = 0.000887 + 0.000526 + 0.000133 + 0.000484 = 0.00203$

202  $\text{NH}_3 \text{ solution} = 1 \times 10^{-6} \times 0.00203 = 0.00000000203 \text{ kg}$

203 **Flow stream  $F_5$  (spent amine solution)**

204  $\text{CO}_2 = 0.0005192 \text{ kg}$

205 **Flow stream  $F_3^1$**

206  $\text{Water used for washing} = 0.5 \times \text{total gas washed} = 0.001015 \text{ kg}$

207 **Flow stream  $F_4^1$**

208  $\text{Let assume } \text{H}_2\text{O in } F_4^1 = \text{H}_2\text{O in } F_3^1 = 0.001015 \text{ kg}$

209  $\text{H}_2\text{O in } F_5 = \text{H}_2\text{O in } F_8 + \text{H}_2\text{O in } F_3^1 - \text{H}_2\text{O in } = 0.08406$

210  $\text{Total } F_5 = 0.000053 + 0.000043 + (0.00118 \times 17) + 0.08406 + 0.0005192 = 0.1047 \text{ kg}$

211 **Balance**

212 At steady state

213 Total input = total output


214  $F_3 + F_8 + F_3^1 = F_4 + F_4^1 + F_5$

215  $0.1072104 = 0.107745$

216 **3.1.1 Material Balance Summary Tables**



217 **3.1.1.1 Absorber**

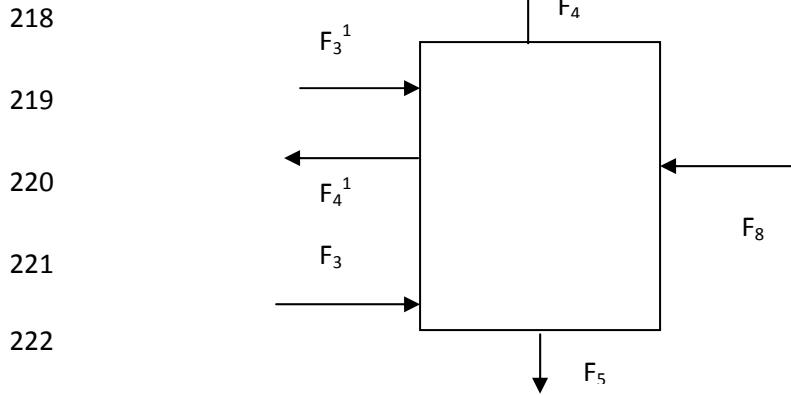

224 Fig. 2: Material Balance diagram for Absorber

225

226 Table 1: Absorber Input Streams

Comp	Mol. Wt	F <sub>3</sub>		F <sub>8</sub>		F <sub>3</sub> <sup>1</sup>	
		Mole kmol/ hr	Mass kg/hr	Mole kmol/ hr	Mass kg/hr	Mole kmol/ hr	Mass kg/hr
CO <sub>2</sub>	44	0.0000118	0.0000364	0.0000118	0.0005192	-	-
O <sub>2</sub>	32	0.000526	0.000133	-	-	-	-
N <sub>2</sub>	28	0.000133	0.000526	-	-	-	-
NH <sub>3</sub>	17	-	-	0.00118	0.02006	-	-
H <sub>2</sub> O	18	-	-	0.08496	0.08496	-	0.001015
H <sub>2</sub> CO <sub>3</sub>	61	-	-	-	-	-	-
Carbamate	62	-	-	-	-	-	-

<b>Total</b>			0.0006954		0.01055		0.001015
--------------	--	--	-----------	--	---------	--	----------

227

228

229

230

231

232

233

234

235

236

237

238 Table 2: Absorber Output Streams

Comp	Mol. Wt	F <sub>4</sub> <sup>1</sup>		F <sub>4</sub>		F <sub>5</sub>	
		Mole kmol/ hr	Mass kg/hr	Mole kmol/ hr	Mass kg/hr	Mole kmol/ hr	Mass kg/hr
CO <sub>2</sub>	44	-	-	0.02006	0.000484	0.0000118	0.0005192
O <sub>2</sub>	32	-	-	0.08406	0.000526	-	-
N <sub>2</sub>	28	-	-	0.000043	0.000133	-	-
NH <sub>3</sub>	17	-	-	-	0.0005713	0.0000118	0.02006
H <sub>2</sub> O	18	-	0.001015	-	0.000286	0.000000701	0.08406
H <sub>2</sub> CO <sub>3</sub>	61	-	-	-	-	0.000000701	0.000043
Carbamate	62	-	-	-	-	0.000000701	0.000053

<b>Total</b>			0.001015		0.00203		0.1047
--------------	--	--	----------	--	---------	--	--------

239

240 **3.1.1.2 Knock-Out Drum 1**


241

242

243

244

245

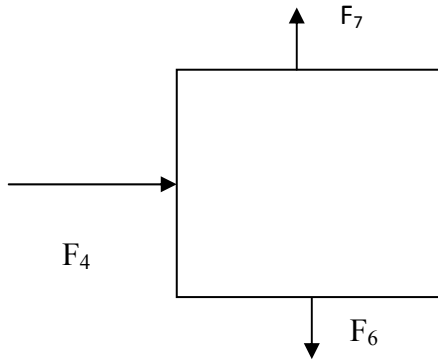


246 Fig. 3: Material Balance diagram for Knock Out Drum 1

247 Table 3: Knock-Out Drum 1 Calculation Details

Comp	INPUT (F <sub>4</sub> )			OUTPUT (F <sub>6</sub> )		OUTPUT (F <sub>7</sub> )	
	Mol. /wt	Mole Kmol/h	Mass kg/hr	Mole kmol/hr	Mass Kg/hr	Mole Kmol/hr	Mass Kg/hr
CO <sub>2</sub>	44	0.000484	0.000484	-	-	0.000484	0.0005192
O <sub>2</sub>	32	0.000526	0.000133	-	-	0.000526	0.000133
N <sub>2</sub>	28	0.000133	0.000133	-	-	0.000133	0.000133
NH <sub>3</sub>	17	-	-	-	0.0029	-	-
H <sub>2</sub> O	18	-	-	-	0.00116	-	-
Total			0.000203		0.00000000203		0.0011782

248

249 **3.1.1.3 Flash Drum**



250

251

252

253

254

255

256 Fig. 4: Material Balance diagram for Flash Drum

257


258 Table 4: Flash Drum Input and Output Streams

INPUT STREAM			OUTPUT STREAM			
	F <sub>13</sub>		F <sub>15</sub>		F <sub>16</sub>	
Comp	Mole kmol/hr	Mass kg/hr	Mole kmol/hr	Mass kg/hr	Mole kmol/hr	Mass kg/hr
CO <sub>2</sub>	-	0.0005192	-	0.0005192	-	-
NH <sub>3</sub>	-	0.02006	-	-	0.86	0.02006
H <sub>2</sub> O	0.000000701	0.08406	-	-	0.000000701	0.08406
H <sub>2</sub> CO <sub>3</sub>	0.00118	0.000043	-	-	0.00118	0.000043
Carbamate	0.00118	0.000053	-	-	0.00118	0.000053
Total		0.1047		0.0005192		0.104216

259

### 260 3.1.1.4 Stripper

261

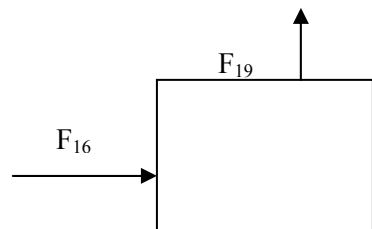

262

263

264

265

266

267 Fig. 5: Material Balance diagram for Stripper

268

269

270


271

272 Table 5: Stripper Input and Output Streams

INPUT STREAMS					OUTPUT STREAMS			
	F <sub>16</sub>		F <sub>18</sub>		F <sub>17</sub>		F <sub>19</sub>	
Comp	Mole kmol/ hr	Mass kg/hr	Mole kmol/ hr	Mass kg/hr	Mole kmol/ hr	Mass kg/hr	Mole kmol/ hr	Mass kg/hr
NH <sub>3</sub>	-	0.02006	-	-	-	0.02006	-	-
H <sub>2</sub> O	0.00000701	0.08406	-	0.00004326	-	0.1690	-	0.00004326
H <sub>2</sub> CO <sub>3</sub>	0.00118	0.000043	-	-	-	-	-	-
Carbamate	0.00118	0.000053	-	-	-	-	-	-
CO <sub>2</sub>	-	-	-	-	-	0.0005192	-	0.00055004
Total		0.104216		0.00004326		0.1896		0.0005933

273

274 3.1.1.5 Knock-Out Drum 2

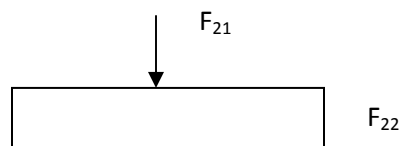

275

276

277

278

279

280 Fig. 6: Material Balance diagram for Knock Out Drum 2

281

282

283 Table 6: Knock-Out Drum 2 Input and Output Streams

INPUT STREAMS				OUTPUT STREAMS			
F <sub>21</sub>				F <sub>22</sub>		F <sub>23</sub>	
Comp	Mole/ wt	Mole kg/hr	Mass kg/hr	Mole kmol/hr	Mass kg/hr	Mole kmol/hr	Mass kg/hr
CO <sub>2</sub>	44	-	0.0005501	-	0.0005501	-	-
H <sub>2</sub> O	18	-	0.00004326	-	-	-	0.00004326
Total			0.0005933		0.0005501		0.00004326

284

285 **3.2 Energy Balance Results**

286 The conservation of energy differs from that of mass in that energy is generated (or consumed) in  
 287 a chemical process. Material can change form; new molecular species was formed by chemical  
 288 reactions where the total mass flow into a process unit must be equal to the flow out at the steady  
 289 state. The same is not true of energy. The total enthalpy of the outlet streams will not equal that  
 290 of the inlet streams if energy is generated or consumed in the processed, such as that due to heat  
 291 of reaction.

292 **3.2.1 Energy Balance Summary Tables**

293 **3.2.1.1 Absorber**

294


295

296

297

298

299

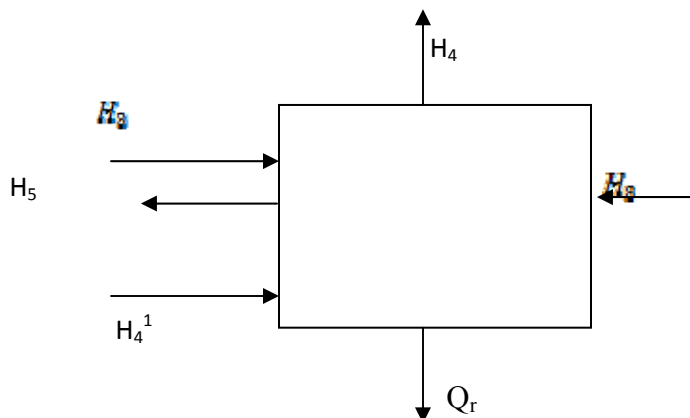

300 Fig. 7: Energy Balance diagram for Absorber

301

302 Where  $Q_p$  = heat of the process, in this case  $Q_p = 0$  (Adiabatic process)

303  $Q_r$  = Heat of the reaction =  $\Sigma - \Delta H_r^0$

304 Total heat input =  $H_3 + H_3^1 + H_8$

305 Total heat output =  $H_5 + H_4 + H_4^1$


306 *Enthalpy Input,  $H_3 = \int_{T_{ref}}^{T_3} \epsilon_n C_p dT$*

307 Table 7: Absorber Energy Balance Summary

ENERGY	INPUT (KJ/hr)	OUTPUT (KJ/hr)
H <sub>3</sub>	0.1704	-
H <sub>4</sub>	-	0.3329
H <sub>4</sub> <sup>1</sup>	-	0.1705
H <sub>8</sub>	3.9952	-
H <sub>5</sub>	-	102.4708
Q <sub>r</sub>	98.8085	-
Total	102.9741	102.9741

308

309 **3.2.1.2 Stripper**

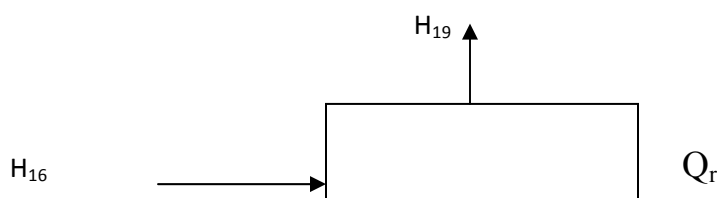

310

311

312

313

314 Fig. 8: Energy Balance diagram for Stripper

315

316

317

318

319 Table 8: Stripper Energy Balance Summary

ENERGY	INPUT (KJ/hr)	OUTPUT (KJ/hr)
H <sub>16</sub>	47.4869	-
H <sub>18</sub>	0.1326	-
H <sub>17</sub>	-	127.77
H <sub>19</sub>	-	- 76.5845
Q <sub>r</sub>		- 98.805
Total	47.6195	- 47.6195

320

321 **3.2.1.3 Gas Cooler 5**


322

323

324

325

326

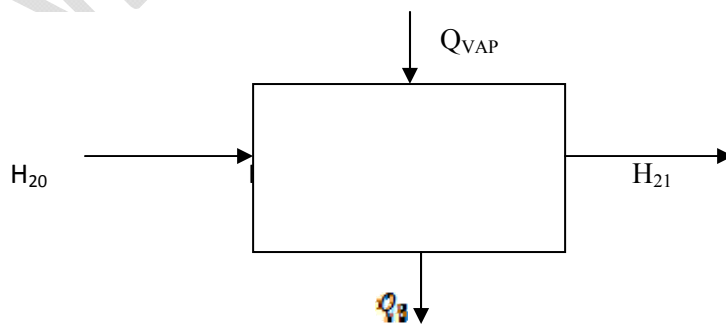

327

Fig. 9: Energy Balance diagram for Gas Cooler 5



328 Table 9: Gas Cooler 5 Energy Balance Summary

ENERGY	INPUT (KJ/hr)	OUTPUT (KJ/hr)
H <sub>20</sub>	5.0624	-
H <sub>21</sub>	-	2.5312
Q <sub>VAP</sub>	0.09769	-
Q <sub>5</sub>	-	2.62889
TOTAL	5.16009	5.16009

329

330

331

332 **3.2.1.4 Solution Heat Exchanger**


333

334

335

336

337

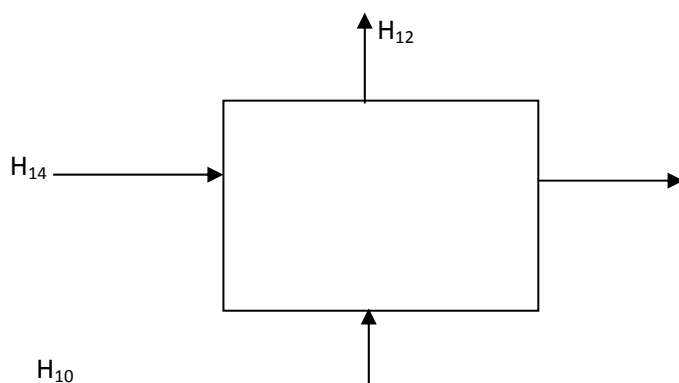

338

339 Fig. 10: Energy Balance diagram for Solution Heat Exchanger

340 **Balance**

341  $H_{10} + H_{14} = H_{12} + H_{13}$

342 **ASSUMPTIONS**

343 (1) The reboiler only generate steam for desorption process.

344 (2) Regenerated Amine solution does not pass through the reboiler so that  $H_{17} = H_{14}$

345 (3) That the energy recovery system is dominant.

346 Table 10: Solution Heat Exchanger Energy Balance Summary

ENERGY	INPUT (KJ/hr)	OUTPUT (KJ/hr)
H <sub>10</sub>	102.4708	-
H <sub>12</sub>	-	182.7006
H <sub>13</sub>	-	47.5402
H <sub>14</sub>	127.77	
Total	230.2408	230.2408

347


348

349

350

351 **3.2.1.5 Solution Cooler 4**

352

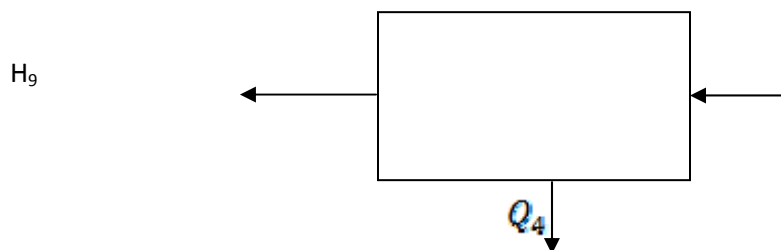

353

354

355

356 Fig. 11: Energy Balance diagram for Solution Cooler 4


357 Hence  $Q_4 = (H_{12} + H_{11}) - H_9$

358 Table 11: Solution Cooler 4 Energy Balance Summary

ENERGY	INPUT (KJ/hr)	OUTPUT (KJ/hr)
H <sub>9</sub>	-	3.9952
H <sub>11</sub>	182.7006	-
Q <sub>4</sub>	-	178.7054
Total	182.7006	182.7006

359

360 **3.2.1.6 Evaporative Gas Cooler 2**



361

362

363

364

365

366 Fig. 12: Energy Balance diagram for Evaporative Gas Cooler 2

367

368  $H_1 + \int_{30}^{80} \epsilon_n C_p dT$

369

370

371 Table 12: Gas Cooler Energy Balance Summary

ENERGY	INPUT (KJ/Hr)	OUTPUT (KJ/Hr)
H <sub>1</sub> <sup>1</sup>	0.8712	-
H <sub>2</sub>	-	0.1704
Q <sub>2</sub>	-	0.7008
TOTAL	0.8712	0.8712

372

373 **3.3 Process Equipment Specifications**

374 **3.3.1 Absorber Specifications**

375 Absorption of CO<sub>2</sub> in 20% w/w NH<sub>3</sub> solution

376 -  $G\delta y = KGa (P_A - P_{Ac}) \delta h$

377 P<sub>Ae</sub> = partial pressure that would be in equilibrium with the bulk of liquid, because the liquid  
378 is a concentrated solution of NH<sub>3</sub>, the partial pressure of CO<sub>2</sub>, P<sub>Ae</sub> in equilibrium with it is  
379 virtually zero. Also PA = yp where P is the total pressure.

380 -  $G\delta y = KGayp\delta h$

381 Rearranging and integrating

382  $\frac{1}{K_{Ga}} = \frac{1}{K_{Ga}} + \frac{H}{K_{La}}$

383

384 Table 13: Results Summary of Absorber Specifications

Equipment name	Absorber
Type	Wetted wall column
Packing type	Ceramic intalox paddle
Packing size	38mm
Packing factor	170m <sup>-1</sup>
Column area	0.00031427712 m <sup>2</sup>
Column diameter	0.01m
Height of absorption section	1.0m
Height of wash section	0.2m
Bottom liquid depth	0.000044m
Top gas disengagement height	0.3048m
Packing height	0.235m
Column material	Stainless steel
Design temperature	50 <sup>0</sup> C
Design pressure	1.1atm
Column wall thickness	5mm
Column cover thickness	5mm (terrispherical)

385 The design of wet scrubbers or any air pollution control device depends on the industrial process  
 386 conditions and the nature of the air pollutants involved. Inlet gas characteristics and dust  
 387 properties are of primary importance. Scrubber was designed to collect particulate matter and/or  
 388 gaseous pollutants (Coulson and Richardson, 2005). Wet scrubbers remove dust particles by  
 389 capturing them in liquid droplets. Wet scrubbers remove pollutant gases by dissolving or  
 390 absorbing them into the liquid. Droplets that are in the scrubber inlet gas were separated from the  
 391 outlet gas stream by means of another device referred to as a mist eliminator or entrainment  
 392 separator.

### 393 3.3.2 Evaporative Gas Cooler 2 specifications

394

$$395 \text{ Area of cooler } A = \frac{\dot{Q}}{U\Delta\zeta m}$$

397 The evaporative cooler (also swamp cooler, desert cooler and wet air cooler) is a device that was  
 398 designed to cool air through the evaporation of water. Evaporative cooling differs from typical  
 399 air conditioning systems which use vapour-compression or absorption refrigeration cycles.

400 Evaporative cooling works by employing water's large enthalpy of vaporization. The temperature  
 401 of dry air can be dropped significantly through the phase transition of liquid water to water  
 402 vapour, which requires much less energy than refrigeration.

403  
 404

405 Table 14: Results summary of Evaporative Gas Cooler 2 specifications

Equipment name	Gas Cooler 2
Type	Horizontal C & R
Sub-type	Split-ring floating Head
Shell type	Split-flow
Number of tubes	130
Number of tubes per pass	65
Surface area of exchange	0.003m <sup>2</sup>
Heat load	0.7008KJ/min
Tube bundle diameter	37.5mm
Shell inside diameter	48.5mm
Bundle clearance	11mm
Overall heat coefficient	0.082w/m <sup>2</sup> °C
Tube-side heat coefficient	11.935 w/m <sup>2</sup> °C
Shell-side heat coefficient	3.1391 w/m <sup>2</sup> °C
Tube-side fouling factor	5000w/m <sup>2</sup> °C
Shell-side fouling factor	5000w/m <sup>2</sup> °C
Tube pitch	25mm
Tube arrangement pattern	Triangular
Baffle spacing	9.7mm
Baffle cut	25%
Baffle type	Segmented
Baffle height	76.275mm
No of support place nods	8
Diameter of nods	9.5mm
Tube-side design press	2.2atm
Tube-side design temp.	70 °C
Tube-side pressure drop	0.215kpa
Shell-side design press	1.1atm
Shell-side design temp.	90 °C
Shell-side design pressure Drop	169.77 kpa
Tube material	Mild steel
Shell material	Stainless steel.

406

407 **3.3.3 Solution Cooler 2 Specifications**

408 Basic design equation

409 
$$\phi = UA\Delta T_m$$

410 **Shell – side heat transfer coefficient**

411 
$$\frac{h_s d_s}{k_f} = J h \times Re \times Pr \times 0.33 \left( \frac{\mu}{\mu_w} \right)^{0.14}$$

412  $h_s$  = shell – side heat transfer coefficient,  $d_e$  = equivalent diameter

413  $J h$  = heat transfer correction factor,  $Re$  = Reynolds number,  $Pr$  = prandth number

414  $\mu$  = viscosity of fluid at mean temp,  $\mu_w$  = viscosity of fluid at wall temp.

415  $(\mu/\mu_w)^{0.14}$  = viscosity correction factor.

416

417 **Overall heat coefficient**

418  $K_w$  for mild steel = 45w/m<sup>0</sup>C (Sinnott and Towler)

419 
$$\frac{1}{U_o} = \frac{1}{h_o} + \frac{1}{h_{od}} + \frac{d_o \ln \frac{d_o}{d_i}}{2k_w} + \frac{d_o}{d_i} \times \frac{1}{h_i} \times \frac{d_o}{d_i} \times \frac{1}{h_{id}}$$

420 **Shell – side pressure drop**

421 
$$\Delta P_s = 8 J f \times \left( \frac{D_s}{d_e} \right) \times \frac{L}{ID} \left( \frac{\rho u s^2}{2} \right) \frac{\mu^{0.14}}{W}$$

422 Neglecting viscosity correction factor

423 From figure 12 (Coulson and Richardson)

424 
$$J f = 5.5 \times 10^{-2}$$

425 Table 15: Results summary of Solution Cooler 2 specifications

Equipment name	Solution cooler
Type	Horizontal shell & tubes
Sub-type	Split-ring floating head
Shell-type	Split-flow
Surface area of exchange	0.304m <sup>2</sup>
Tube-inside diameter	16mm
Tube-outside diameter	20mm
Heat load	178.7054KJ/min

Tube length	4.88m
Tube-sheet	0.03m
Shell inside diameter	87.55mm
Tube bundle diameter	37.55mm
Bundle clearances	50mm
Number of tubes	1
Number of tube pass	1
Number of tubes per pass	1
Baffle spacing	17.51mm
Baffle cut	25 % (segmented type )
Tube pitch	25mm
Tube arrangement pattern	Triangular
Overall heat coefficient	362.9896 w/m <sup>2</sup> °C
Tube-side pressure drop	0.000013kpa
Shell-side pressure drop	243.17kpa
Tube-side design pressure	2.7atm
Shell-side design pressure	2.2atm
Tube-side design temp.	100 °C
Shell-side design temp.	212 °C
Shell wall thickness	5mm
Tube material	Mild steel
Shell material	Stainless steel

426 **3.3.4 Cooler 5 (Condenser 5) Specifications**

427 **A = surface area of exchange.**

428 =  $\varphi$

429  $U\Delta T_m$

430 **Tube bundle diameter (D<sub>b</sub>)**

$$D_b = d_o \left( \frac{N_t}{K_1} \right)^{\frac{1}{ni}}$$

431

432 From Table 15 (Coulson and Richardson), for triangular pitch.

433  $K_1 = 0.175, ni = 2.285$

434 **Tube inside coefficient.**

435 Cross – sectional area of one tube

$$\frac{\pi (du^2)}{4}$$

436

437 Shell – side heat transfer coefficient

$$h_s = \frac{K_f}{de} \times J_n \times Re \times Pr^{0.33} \times \left(\frac{\mu}{\mu_w}\right)^{0.14}$$

438

439 where  $h_s$  = shell – side heat coefficient,  $K_f$  = thermal conductivity of fluid

440  $J_n$  = heat transfer coefficient,  $R$  = Reynolds number,  $Pr$  = prandtl

441  $\left(\frac{\mu}{\mu_w}\right)^{0.14}$  = viscosity correction factor.

442

443

444

445

446 Table 16: Results summary of Cooler 5 (Condenser 5) specifications

Equipment name	Cooler 5
Type	Shell & tube H.E
Sub-type	Split-ring floating head
Head load	2.62889kJ/min
Shell type	Two shell pass
Number of tubes	1
Number of tubes pass	4
Number of tubes per pass	1
Tube bundle diameter	5.88mm
Surface area of cooler	0.00245m <sup>2</sup>
Shell inside diameter	63.88mm
Baffle spacing	494mm
Baffle cut	25%
Baffle height	0.75 Ds = 47.91mm
Baffle type	Segmented
Tube pitch	31.25mm
Tube pattern	Triangular pattern
No of rods	12
Diameter of rods	9.5mm
Shell-side design press	5.984atm
Tube-side design press	2.75atm
Shell-side design temp.	310 <sup>0</sup> C



Tube-side design temp.	160 <sup>0</sup> C
Shell material	Stainless steel
Overall heat coefficient	3.5142w/m <sup>20</sup> C
Shell wall thickness	5mm
Shell cover thickness	5mm
Tube-side pressure drop	0.0000079kpa
Shell-side pressure drop	791.388kpa.

447

### 448 3.3.5 Knock-Out Drum 1 Specification

449 Vapour–liquid separator was designed to separate a vapour–liquid mixture. The vapour–liquid  
 450 separator is also referred to as a flash drum, knock-out drum, knock-out pot, compressor suction  
 451 drum or compressor inlet drum (Kister, 1992). The vapour travels gas outlet at a design velocity  
 452 which minimizes the entrainment of any liquid droplets in the vapour as it exits the vessel.

453 Table 17: Results summary of Knock Out Drum 1 specification

Equipment name	Knock-out drum I
Type	Vertical vessel
Drum diameter	0.002m
Drum length	0.004m
Mist eliminator type	Knitted wire-mesh
Mist eliminator thickness	0.152m
Clearance b/w liquid surface and centre of nozzle	0.3m
Clearance b/w centre of inlet Nozzle and mist eliminator	0.1524m
Clearance b/w mist eliminator and drum top edge	0.31m
Drum material of construction	Stainless steel

Drum wall thickness	7mm
Head and closure type	Ellipsoidal
Head and closure type	7mm
Mist eliminator material	Stainless steel.

454

### 455 3.3.6 Knock-Out Drum 2 Specifications

456 Table 18: Results summary of Knock Out Drum 2 specifications

Equipment name	Knock-out drum 2
Type	Vertical cylinder vessel
Drum diameter	0.002m
Drum length	1.0m
Mist eliminator type	Knitted wire-mush
Mist eliminator thickness	0.152m
Liquid depth	0.1374m
Clearance b/w liquid surface and centre of nozzle	0.05m
Clearance b/w the centre of nozzle and the mist eliminator	0.1m
Clearance b/w the mist eliminator and drum top	0.31m
Drum wall thickness	5mm
Head and closure type	Tom spherical
Head and closure thickness	5mm
Mist eliminate material	Stainless
Drum material	Stainless steel

457

### 458 3.3.7 Solution Heat Exchanger Specifications

459 A heat exchanger was designed for efficient heat transfer from one medium to another. The  
 460 media is separated by a solid wall, so that they never mix, or they may be in direct contact  
 461 (Kister, 1992). They are widely used in space heating, refrigeration, air conditioning, power  
 462 plants, chemical plants, petrochemical plants, petroleum refineries, natural gas processing, and  
 463 sewage treatment.

464 Table 19: Results summary of Solution Heat Exchanger specifications

Equipment name	Solution Heat exchanger
Type	Horizontal S&T
Sub-type	Split-ring floating head
Head load	- 54.9306 KJ/min
Shell type	Split flow
Number of tubes	1
Number of tubes pass	1
Number of tubes per pass	1
Tube bundle diameter	37.5504mm
Surface area of exchanger	0.019m <sup>2</sup>
Shell inside diameter	87.5504mm
Baffle spacing	17.6mm
Baffle cut	25%
Baffle height	135mm
Baffle type	Segmented
Tube pitch	25mm
Tube pattern	Triangular pattern
No of rods	8
Bundle diameter	124mm
Shell inside diameter	180mm
Tube outside diameter	20mm
Tube inside diameter	16mm
Tube length	4.88mm
Tube-sheet thickness	0.03m
Bundle clearance	50mm
Diameter of rods	9.5mm
Shell-side design press	1.1atm
Tube-side design press	1.1atm
Shell-side design temp.	160 <sup>0</sup> C
Tube-side design temp.	360 <sup>0</sup> C

Shell material	Stainless steel
Overall heat coefficient	300w/m <sup>2</sup> °C
Shell wall thickness	5mm
Tube -side coefficient	261.13w/m <sup>2</sup> °C
Shell-side coefficient	361.324w/m <sup>2</sup> °C
Shell cover thickness	5mm

465

### 466 3.3.8 Flash Drum Specifications

467 Table 20: Results summary of Flash Drum specifications

Equipment name	Flash drum
Type	Vertical gas
Drum diameter	Liquid separator
Drum length	0.002m
Mist dominator type	Knitted wore mesh
Mist dominator thickness	0.152m
Liquid depth	0.30m
Clearance between liquid surface and centre of nozzle	0.30m
Clearance between centre wilet nozzle & mist dominator	0.61m
Clearance between mist dominator and drum top	0.31m
Drum material of construction	Stainless steel
Head and closure type	Ellipsoidal

468

### 469 4. Conclusion:

470 The design of a plant to recover CO<sub>2</sub> from spent air from aerobic fermentation was successfully  
 471 carried out. Material and energy balances were carried out on each equipment and then over the

472 entire process. These balances were used in the chemical and mechanical engineering design of  
473 the following equipment: absorber, knock out drum, flash drum, gas cooler, reboiler and  
474 stripping column -how?, and what validates the chemical process absorption column design for CO<sub>2</sub>  
475 sequestration made in this study?, and is its usefulness.

#### 476 **References:**

477 Ahegot, A. S. & Celia, M. A. (2002). Modeling carbon (IV) oxide transport in unsaturated soils  
478 in (Hassainzadeh et al eds.) *Proc. 14th International Conference in Computational Methods in*  
479 *Water Resources*, 41-47.

480 Aroonwilas, A. & Veawab, A. (2007). Integration of CO<sub>2</sub> capture unit using single- and blended-  
481 amines into supercritical coal-fired power plants: Implications for emission and  
482 energymanagement. *International Journal of Greenhouse Gas Control*, 1, 143-150.

483 Baum, J. A. & Woehlck, H. J. (2003). Interaction of inhalational anaesthetics with CO<sub>2</sub>  
484 absorbents. *Best Prac. Res., Clin. Anaesthesiol., Vol. 17*, 63-76.

485 Coulson, J. M. and Richardson, J.F. (1968). *Chemical Engineering*, Vol. 2. Pergamon, N.Y.

486 Demontigny, D. Tontiwachwuthikal, P. & Chakins, A. (2005). Comparing the absorption  
487 performance of packed columns and membrane contactors. *Ind. Eng. Chem. Res*, 44, 5726-5732.

488 Liao, C. H. & Li, M. H. (2002). Kinetics of absorption of carbon (IV) oxide into aqueous  
489 solutions of monoethanolamine + N-methyloliethanolamin. *Chem. Eng. Sci.*, 57, 4569-4582.

490 Liao, C. H. Liu, W. T. & Tan, C. S. (2003). Removal of CO<sub>2</sub> by absorption in a rotating packed  
491 bed. *Ind. Eng. Chem. Res.*, 42, 2381-2386.

492 Mani, F. & Peruzzini, M. (2006). CO<sub>2</sub> absorption by aqueous NH<sub>3</sub> solutions: speciation of  
493 ammonium carbamate, bicarbonate and carbonate by a CNMR study. *Green Chem.*, 8, 995-1000.

494 Qing, F. et. al. (2011). Kinetics of CO<sub>2</sub> absorption in aqueous ammonia solution. *International*  
495 *Journal of Greenhouse Gas Control*, 2010, 4(5), 729-738.

496 Sender, J. D. & Henley, E. J. (1998). *Separation process principles*. John wiley and Sons, Inc.,  
497 New York.

498 Watson, R.T., (2001): "Climate Change", Synthesis Report, Cambridge University Press, UK.

499 Yeh, A. C. & Bai, H. (1999). Comparison of ammonia and monoethanoamine solvents to reduce  
500 CO<sub>2</sub> greenhouse gas emissions. *Sci. Total. Environ.*, 228, 121-133.

501 Zeng, Q. et. al. (2011). Mass transfer coefficients for CO<sub>2</sub> absorption into aqueous ammonia  
502 solution using a packed column. *Ind. Eng. Chem. Research*, 50, 10168-10175.

503

504

505

UNDER PEER REVIEW