

## Original Research Article

# Enhanced Biodegradation of Degreaser Using *Pseudomonas* and *Bacillus* Species in Fresh Water Ecosystem

### ABSTRACT

**Aim:** The aim of this study is to enhance the biodegradation of degreasers used in upstream sectors of Nigeria Petroleum Industry using bio-augmenting organisms such as: *Pseudomonas* and *Bacillus* species in freshwater Ecosystem.

**Study Design:** This study employs experimental designs, Randomized Block Design treatment set up, statistical analysis of data and interpretation.

**Place and Duration of Study:** Freshwater sample for this research was collected from Asarama Andoni, in Rivers State, Nigeria. The study lasted for six months.

**Methodology:** The experimental set-up was carried in 500ml conical flask with two species of bacteria, two types of degreaser and fresh water sample giving a total of 8 set-up including controls. The *Pseudomonas* and *Bacillus* species used in this study were isolated from the freshwater ecosystem and identified using standard microbiological methods. The bioremediation potential of the respective test organisms were monitored at ambient temperature  $28 \pm 0.2^\circ\text{C}$  for 28 days at a constant interval of 7 days using the following Physiochemical parameter; Total dissolved Solid, Hydrogen concentrations ions and Total Hydrocarbon Content. While the following Microbiological parameters; Total heterotrophic Bacteria, Total Heterotrophic Fungi, Hydrocarbon Utilizing Bacteria, and Hydrocarbon Utilizing Fungi were monitored.

**Results:** The percentage of degradability of the respective set-ups ranged from Control (Rigwash) (3.29%) < *Pseudomonas* sp. + Rigwash (27.56%) < *Pseudomonas* + *Bacillus* + Rigwash (31.57 %), *Bacillus* sp.+ Rigwash (37.57%) Control 2 (Aquabreak) (9.45%) < *Pseudomonas* sp.+ Aquabreak (26.77%) < *Pseudomonas* + *Bacillus* + Aquabreak (31.32%) < *Bacillus* sp.+ Aquabreak (32.46%). Overall evaluation revealed that *Bacillus* sp. had a higher biodegradation potential on both degreaser (Rigwash and Aquabreak) in freshwater than *Pseudomonas* sp. Five species of bacteria: *Escherichia coli*, *Micrococcus*, *Citrobacter*, *Bacillus*, and *Pseudomonas* species and four fungal species: *Penicillium*, *Mucor*, *Aspergillus* and *Rhizopus* species were isolated and identified as hydrocarbon utilizing bacteria and fungi organisms respectively.

**Conclusion:** The results revealed that *Bacillus* species have more degradability potential than *Pseudomonas* species for both Aquabreak and Rigwash. These results also indicated the low biodegradation potential of Rigwash in fresh Ecosystem

Keywords: Aquabreak, Degreaser, *Pseudomonas*, *Bacillus*, fresh Ecosystem. Rigwash, Enhanced biodegradability

## 1. INTRODUCTION

Many substances known to have toxic properties are regularly introduced into the environment through human activity. These substances range in degree of toxicity and danger to human health. Many of these substances either immediately or ultimately come in contact with or are sequestered by soil [1]. Conventional methods to remove, reduce, or mitigate toxic substances introduced into soil or ground water via anthropogenic activities and processes include pump and treat systems, soil vapor extraction, incineration, and containment. Utility of each of these conventional methods of treatment of contaminated soil and/or water suffers from recognizable drawbacks and may involve some level of risk.

Bioremediation offers an alternative method to detoxify contaminants and is being used as an effective means of mitigating hydrocarbons, halogenated organic solvents and compounds, non-chlorinated pesticides and herbicides, nitrogen compounds, metals and radionuclides [2].

Bioremediation technology exploits various naturally occurring processes which include; natural attenuation, biostimulation, and bioaugmentation. Natural attenuation occurs without human intervention other than monitoring but rather relies on natural conditions and behavior of soil microorganisms that are indigenous to soil [3]. Biostimulation also utilizes these indigenous microbial populations to remediate contaminated soils and consists of adding nutrients and other substances to soil to catalyze natural attenuation processes. Bioaugmentation involves introduction of exogenic microorganisms (sourced from outside the soil environment) capable of detoxifying a particular contaminant, sometimes employing genetically altered microorganisms [4,5]. During bioremediation, **Microorganisms adapt to the environment for effective competition for available nutrient, utilize chemical contaminants in the environment as energy source** and, through oxidation-reduction reactions, metabolize the target contaminant into useable energy for microbes [6]. The by-products (metabolites) released back into the environment are typically in a less toxic form than the parent contaminants. For example, petroleum hydrocarbons can be degraded by microorganisms in the presence of oxygen through aerobic respiration. The hydrocarbon loses electrons and is oxidized while oxygen gains electrons and is reduced. The result is formation of carbon dioxide and water [7]. When oxygen is limited in supply or absent, as in saturated or anaerobic soils Environment, anaerobic (without oxygen) respiration prevails. Generally, inorganic compounds such as nitrate, sulfate, ferric iron, manganese, or carbon dioxide serve as terminal electron acceptors to facilitate biodegradation [8,9].

However the introduction of degreaser alters the environment causing a selection of those microorganisms capable of degrading petroleum [3]. According to Nrior and Odokuma [10] degreasers are chemical substances used for the removal of water insoluble substances such as grease, oil, paint, from auto engine parts. A degreaser can either be oil-based or water-based. Oil-based degreasers are usually toxic and flammable. Even small amounts entering surface or groundwater can result in serious pollution [11]. Degreasers can be used in a variety of industries such as aircraft, automotive, nuclear power plants, pharmaceutical, paint, printing, transportation, optics, marine and semiconductor. They can also be used in domestic cleaning, e.g. floors, tiles cleaning, etc. Many oil-based degreasers readily evaporate and contribute to smog or ground level ozone.

Water based cleaners are generally safer for the user and the environment. They are less toxic than oil based degreasers and small amounts can be broken down in sewage treatment facilities [10]. In the biodegradation process, it is pertinent that the only carbon source should be petroleum products. This otherwise would slow down the biodegradation rates as the microorganism will turn to alternative carbon sources as a source of energy thus leaving behind the hydrocarbon. More so, hydrocarbon degrading microorganisms require nitrate and phosphate for growth, limitation of these substrates affects the rate and extent of degradation of petroleum in soil environment [12]. The aim of this study is to evaluate the biodegradation of degreasers used in upstream sectors of Nigeria Petroleum Industry enhanced with bio-augmenting organisms *Pseudomonas* and *Bacillus* species in freshwater Ecosystem

## 2. MATERIALS AND METHODS

### 2.1 Study Area and Sample Collection

The study area is Asarama Andoni, in Rivers State, Nigeria. The freshwater used in this study was collected in a sterile four (4) litres plastic container.

### 2.2 Isolation of the Test Organisms

The bio-augmenting organisms (*Bacillus* and *Pseudomonas* species) were isolated from the fresh water using standard microbiological methods (spread plate method) as described by Prescott, *et al.*, [13]. An aliquot (0.1ml) of the fresh water sample was aseptically inoculated into properly dried nutrient agar plates (15ml in each plate) in duplicate, spread evenly using flamed bent rod and incubated at 37°C for 24 hours, after incubation, the bacterial colonies that grew on the plates were sub-cultured unto fresh nutrient agar plates using the streak plate technique to obtain pure culture of the bacterial isolates as adopted by [14].

### 2.3 Characterisation and Identification of Test Organisms

Bacterial isolates were characterised on the basis of their colonial morphology, microscopic and biochemical characteristics (Table 1) and by making reference to the identification manual by [15]

### 2.4 Preparation of Broth culture and Standardization of Inoculums

Five colonies from the pure culture of each isolate were inoculated into nutrient broth in 500 ml conical flask separately, and incubated at 37°C for 18 to 24 hours. After incubation, an aliquot of 0.1ml was inoculated on a pre dried nutrient agar to determine the total viable counts of the broth culture. Turbidity of the bacterial suspension (i.e overnight nutrient broth (250ml) with population density) was adjusted to match that of 0.5 McFarland Standard (30 to 300 colonies mostly 200 colonies) by making a dilution of 1:100 in sterile nutrient broth [16].

### 2.5 Bioremediation set-up.

The experimental set-up was carried out in 500ml conical flask with two species of bacteria, two types of Chemical and fresh water sample giving a total of 8 set-up including controls. The flask were coded with number from 1-8. Set 1 contained 396ml of freshwater and 4ml of Aquabreak without organism which served as control for Aquabreak while set-5 was a control for Rigwash it contained 396ml of freshwater and 4ml of Rigwash without organism.

## 2.6 Monitoring of the bioremediation Potential

The bioremediation potential of the respective test organisms were monitored for 28 days at a constant interval of 7 days using the following Physiochemical parameter; Total dissolved Solid (TDS), Hydrogen concentrations (pH) and Total Hydrocarbon Content (THC). While the following Microbiological parameters; Total heterotrophic Bacteria, (THB) Total Heterotrophic Fungi (THF), Hydrocarbon Utilizing Bacteria (HUB) and Hydrocarbon Utilizing Fungi (HUF) were also monitored.

## 2.7 Physiochemical Parameters

### 2.7.1 Determination of Total Hydrocarbon Content (THC) in Liquid Sample

- 20ml of sample was measured into a 150ml flask
- 4ml of Extracting solvent (Chloroform) was added and shaken for 2minutes and poured into a separating funnel.
- The extract was filtered through a glass funnel stocked with cotton wool and anhydrous Sodium Sulphate.
- Absorbance was measured @ 420nm.

### 2.7.2 Percentage (%) Biodegradation Evaluation

The percentage (%) biodegradation rate was calculated from the formula adopted by Nrior *et al.*, [17] as follows:

#### Step 1:

Amount of total oil and grease remediated equals to Initial concentration of THC (Day 0) minus final concentration of pollutant at end of experiment (last day).

#### Step 2:

Percentage (%) bioremediation equals to amount of oil and grease remediated divided by initial concentration of pollutant (Day 0 or 1) multiplied by 100.

Thus;  $B_c = I_c - F_c$

$$B_x = I_c - I_o$$

Where,  $B_c$  = Amount of oil and grease degraded

$I_c$  = Initial concentration of oil and grease (Day 0)

$F_c$  = Final concentration of oil and grease at end of experiment (Last day)

$I_o$  = Initial concentration value of Control at day 0

$B_x$  = Actual amount of oil and grease in test medium

$$\% \text{ Bioremediation} = \frac{B_c}{B_x} \times 100$$

### 2.7.3 Determination of pH and Total Dissolved Solid (TDS)

The pH and Total Dissolved Solid (TDS) were determined using Multiple Hannah meter as follows:

- a) 20ml of liquid sample was measured into 100ml beaker
- b) The electrode meter was immersed into the sample
- c) The pH and electrical conductivity were recorded for each sample.

## 2.8 Microbiological Parameters

### 2.8.1 Total Heterotrophic Bacteria (THB)

Total heterotrophic bacteria were enumerated using spread plate method. An aliquot (0.1ml) from  $10^{-5}$  dilution (Dilution ( $10^{-5}$ ) was used as appropriate after dilution range finding test) from each of the set-ups were aseptically transferred unto properly dried nutrient agar plates in duplicate, spread evenly using flamed bent glass rod and incubate at  $37^{\circ}\text{C}$  for 24 hours as described by Prescott *et al.*, [11]. After incubation, the bacterial colonies that grew on the plates were counted and average taken. Total Heterotrophic Bacteria (THB) Counts was then taken and expressed as colony forming unit per milliliter using the equation below as adopted by Nrior and Kpormon [14]. Dilution ( $10^{-4}$ ) was used as appropriate after dilution range finding test.

THB (cfu/ml) =  $\frac{\text{Number of Colonies}}$

$\text{Dilution } (10^{-4}) \times \text{Volume plated } (0.1\text{ml})$

### 2.8.2 Total Heterotrophic Fungi (THF)

The total Heterotrophic fungi in each of the set-ups were enumerated using spread plate method. An aliquot (0.1ml) of the dilution of  $10^{-2}$  dilution was aseptically transferred unto properly dried Sabouraud Dextrose Agar plates containing antibiotic (250 Tetracycline) to inhibit bacterial growth, in duplicate, spread evenly using bent glass rod and incubate at  $35^{\circ}\text{C}$  for 3 days (This incubator temperature when using Sabouraud Dextrose Agar gives optimal clear growth in 3 days but ambient temperature of  $28 \pm 0.2^{\circ}\text{C}$  in South South Nigeria stays for 5 days for optimal growth). Fungal colonies that grew on the plate were counted and expressed as colony forming unit per milliliter using the below equation:

Dilution ( $10^{-2}$ ) was used as appropriate after dilution range finding test.

THF (cfu/ml) =  $\frac{\text{Number of colony}}$

$\text{Dilution } (10^{-2}) \times \text{Volume plated } (0.1\text{ml})$

### 2.8.3 Hydrocarbon Utilizing Bacteria and fungi (HUB and HUF)

An aliquot of 0.1 ml from  $10^{-2}$  dilution of the respective set-ups were inoculated into Mineral salt agar which was formulated as adopted by Nrior and Odokuma [10] for isolation of both hydrocarbon utilizing bacteria and fungi, in duplicate using spread plate techniques. Sterile filter papers placed in the cover of the Petri dishes were saturated with 1ml of crude oil. The plates were then incubated inverted at  $28^{\circ}\text{C}$  for 5-7 days [17]. The

filter paper saturated with crude oil served as a sole source of carbon [10,18]. Colonies formed in the respective plates were counted and the mean values were recorded and expressed as cfu/ml. The mineral salt agar used for enumeration of hydrocarbon utilizing bacteria was amended with fungizone lotion while for hydrocarbon utilizing fungi the medium was amended with 250 µg of tetracycline to inhibit the growth of hydrocarbon utilizing bacteria [18].

### 2.8.4 Composition of the mineral salt agar

K<sub>2</sub>HPO<sub>4</sub> (0.5g), MgSO<sub>4</sub> .7H<sub>2</sub>O (0.3g), NaCl<sub>2</sub> (0.3g), MnSO<sub>4</sub>.H<sub>2</sub>O (0.2g), FeSO<sub>4</sub>.6H<sub>2</sub>O (0.02g), NaNO<sub>3</sub> (0.03g), ZnCl<sub>2</sub> (0.3g) and Agar (15g) into 1000ml of distilled water.

## 3. RESULTS AND DISCUSSIONS


The morphological and Biochemical characteristics of the test isolates used for the enhanced biodegradation of the Degreasers (Aquabreak and Rigwash) are presented in Table1.

Table 1: Morphological and Biochemical characteristics of the test organisms


Tests	Isolate A	isolate B
Colour of colony	Creamy	Greenish
Shape of colony	Circle and raised	Round and flat
Size of colony	Tiny	Small
Cell shape	Straight long rod	Curve rod
Gram's reaction	+	-
Motility	+	+
Catalase	+	+
Oxidase	+	+
Mr	+	-
Vp	-	-
Indole	-	-
Urease	-	-
Coagulase	-	-
Citrate utilization	+	+
Ammonia oxidation	-	-
Nitrate reduction	-	+
Mannitol	+	+
Glucose	+	-
Sucrose	+	-
Probable organism	<i>Bacillus spp</i>	<i>Pseudomonas sp.</i>

Physiochemical parameters of degreaser contaminated freshwater Ecosystem of the Freshwater contaminated with oil Aquabreak, and Rigwash and enhanced with the respective organisms were taken at constant interval of seven days for one month respectively. The total dissolved solids and pH of the different samples were measured using a Multiple Hanna meter. The meter was calibrated and then used to measure the TDS and pH of the samples which were put in a sterile 50 ml measuring beaker and this was done after every 7 days up

to 28 days (Figures 1 and 2). The Total Dissolved Solids (mg/l) in the sample which appear in decreasing order implies that the array of chemical contaminant is decreasing [10,17].

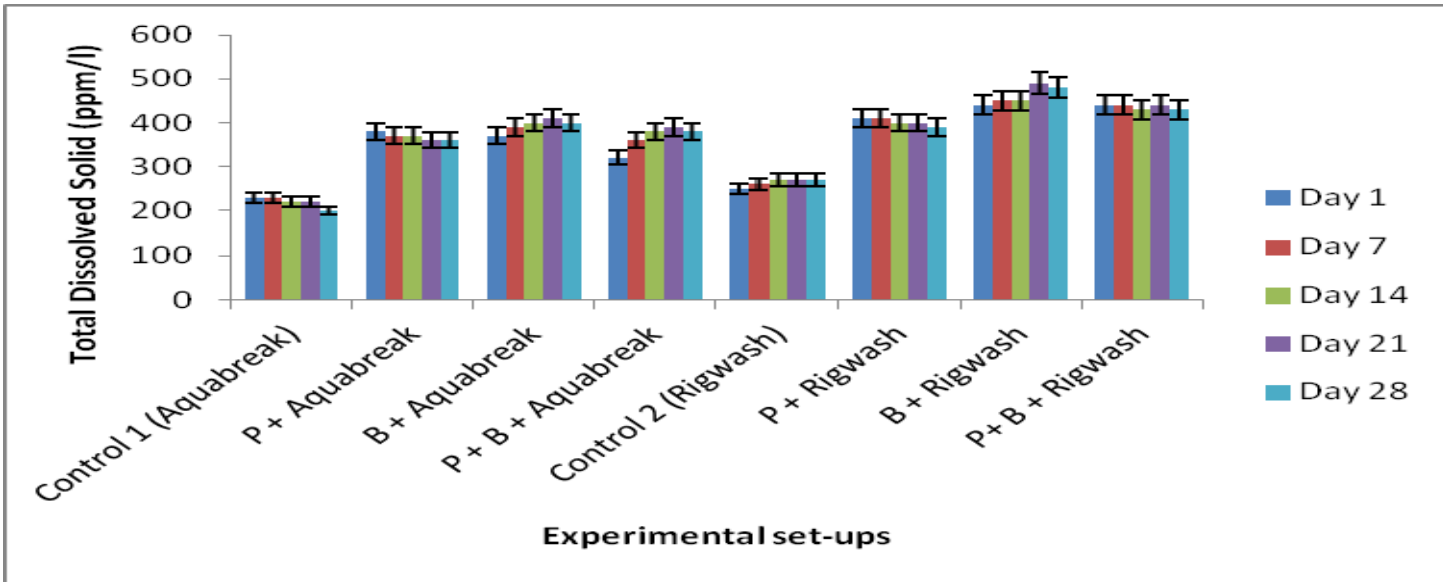

**Fig 1: Changes in Total Dissolved Solids during Enhanced Biodegradation of Degreaser in freshwater**  
Key: P = *Pseudomonas* sp., B = *Bacillus* sp.

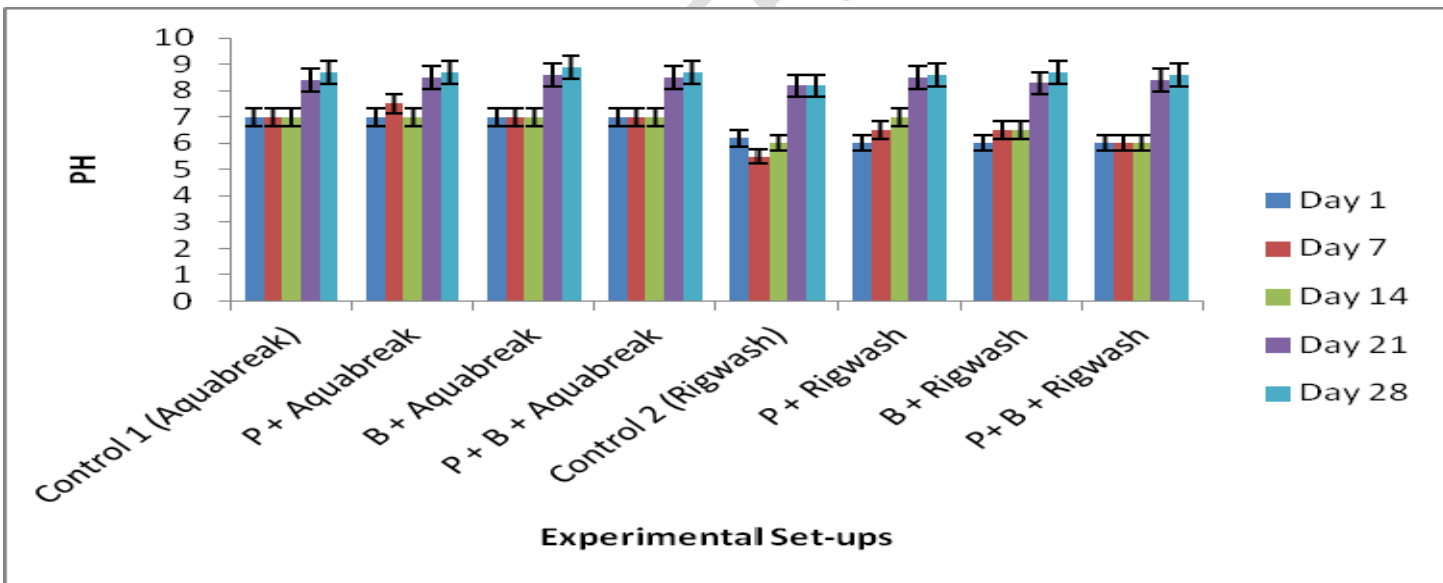

**Figure 2: Changes in pH Concentration during Enhanced Biodegradation of Degreaser in freshwaters**  
Key: P = *Pseudomonas* sp., B = *Bacillus* sp.

The results of total hydrocarbon content (THC) in the respective freshwater contaminated with Aquabreak and Rigwash as well as the uncontaminated freshwater are presented in the Table 2. The continuous decrease in value of THC as revealed in table indicates enhance degradation of the degreaser by the test bacteria

(*Pseudomonas* and *Bacillus* species). These results are in agreement with the observation reported by Nrior *et al* [17].

**Table 2: Changes in the Total Hydrocarbon Content (THC) during Enhanced Biodegradation of Degreaser in freshwater**

Sample	Unit	Day 1	Day 7	Day 14	Day 21	Day 28
Control 1 (Aquabreak)	Mg/l	91.27	78.27	72.27	75.87	74.67
<i>Pseudomonas sp.</i> + Aquabreak	Mg/l	85.47	64.27	55.87	50.67	44.27
<i>Bacillus sp.</i> + Aquabreak	Mg/l	84.27	61.27	54.27	38.27	34.27
<i>Pseudomonas</i> + <i>bacillus</i> + Aquabreak	Mg/l	83.87	62.67	55.07	40.27	36.27
Control 2 (Rigwash)	Mg/l	198.27	197.27	195.07	194.27	192.67
<i>Pseudomonas</i> + Rigwash	Mg/l	197.27	176.27	157.47	154.67	151.47
<i>Bacillus</i> + Rigwash	Mg/l	195.87	170.67	154.27	147.87	134.47
<i>Pseudomonas</i> + <i>bacillus</i> + Rigwash	Mg/l	196.27	175.27	156.27	152.27	144.67

The percentages of degradability potential of the respective bacterial used for the enhancement are shown in Figure 3 and 4. The figures show that *Bacillus* species has high potential to enhance degradation of both Rigwash and Aquabreak polluted freshwater when compared to *Pseudomonas species* and consortium of both isolates. The percentage of degradability of respective set-up ranged from Control (Rigwash) (3.29%) < *Pseudomonas sp.* + Rigwash (27.56%) < *Pseudomonas* + *Bacillus* + Rigwash (31.57 %), *Bacillus sp.* + Rigwash (37.57%) Control 2 (Aquabreak) (9.45%) < *Pseudomonas sp.* + Aquabreak (26.77%) < *Pseudomonas* + *Bacillus* + Aquabreak (31.32%) < *Bacillus sp.* + Aquabreak (32.46%)

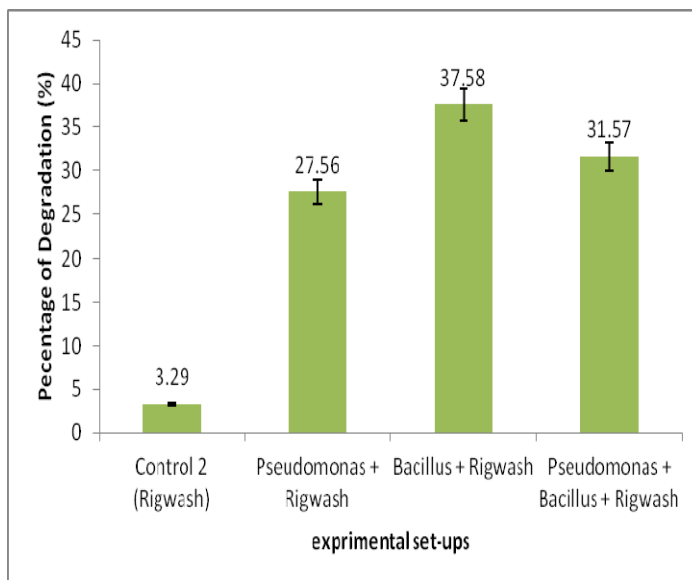


Fig 3: Degradation Percentage of Aquabreak



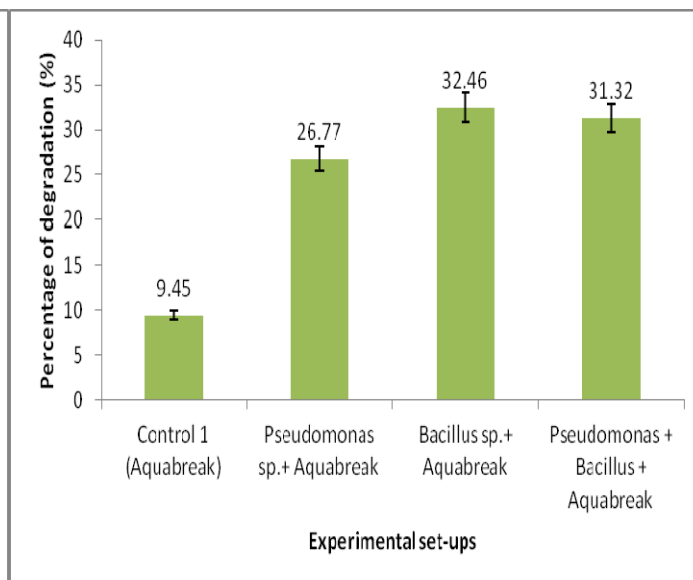


Fig 4: Degradation Percentage of Rigwash


The result of total Microbial counts of the freshwater contaminated with Aquabreak and Rigwash, Bioaugmented with *Bacillus* and *Pseudomonas* species for enhanced degradability and unenhanced freshwater which served as control are presented in Figure 5, 6, 7 and 8. The total heterotrophic bacterial count showed that the freshwater enhanced with *Bacillus* species have the highest count of heterotrophic bacteria, followed by freshwater enhanced with both *Bacillus* and *Pseudomonas* species and then control (Figure 5 and 6). This shows an increase in the number of colonies as days passes. The population levels of hydrocarbon utilizers and their proportions within the microbial community appear to be a sensitive index of environmental exposure to hydrocarbon [19,20]. Fungi population showed similar trend but with a lower value compared to Total Heterotrophic bacteria; degreaser contaminated freshwater enhanced with *Bacillus* species have the highest value (Fig. 7-8).

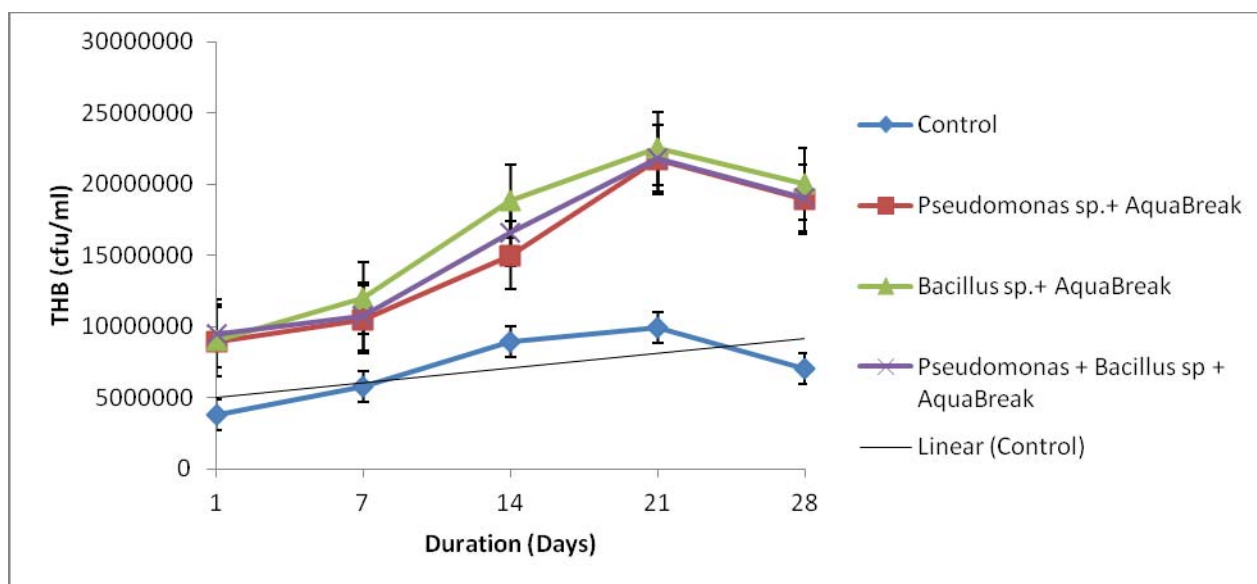


**Fig.5: Changes in Total Heterotrophic Bacteria (THB) (cfu/ml) count for Aquabreak during Enhanced Biodegradation of Degreaser in freshwater**

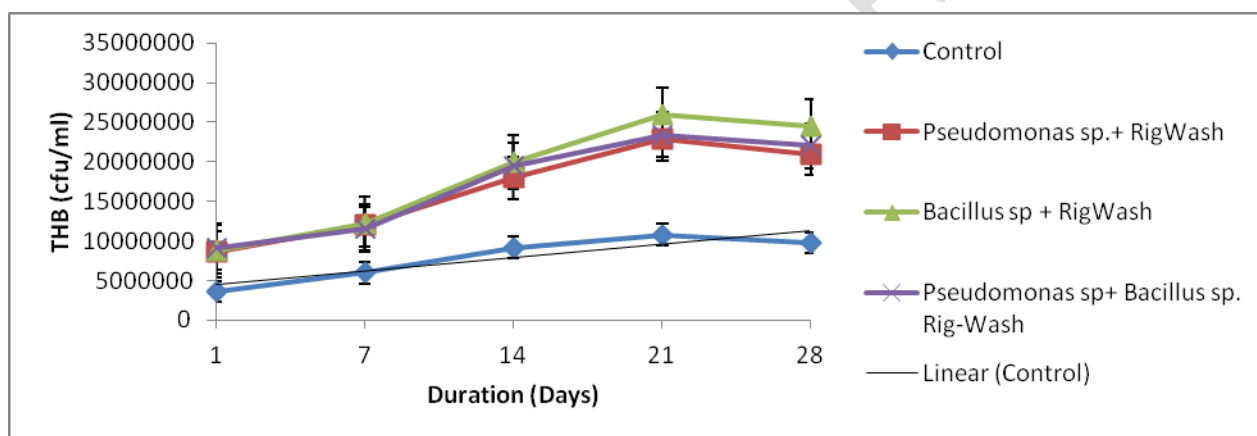

**Fig.6: Changes in the Total Heterotrophic Bacterial (THB) (cfu/ml) Count for Rigwash during Enhanced Biodegradation of Degreaser in freshwater**

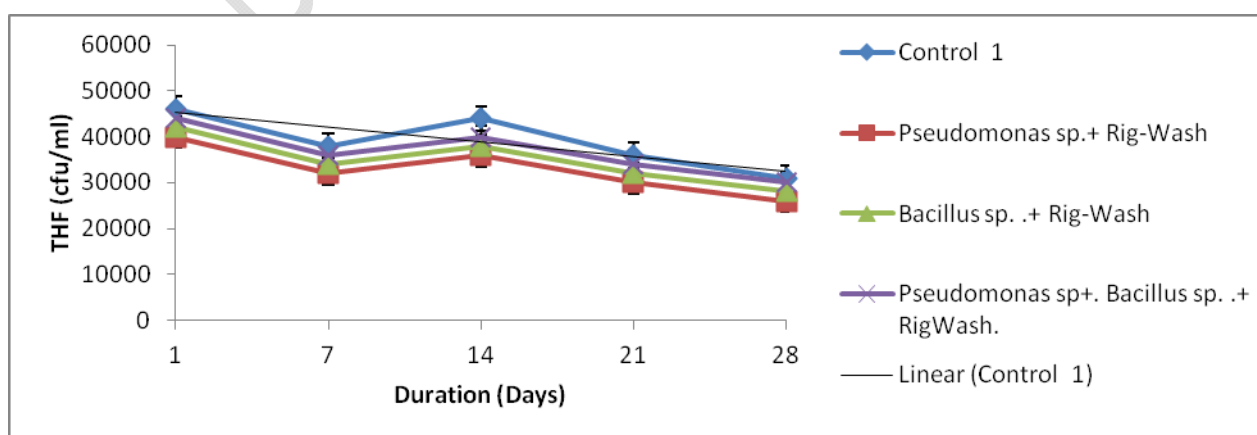


**Fig.7: Changes in the Total Heterotrophic Fungi (THF) (cfu/ml) Count for Rigwash during Enhanced Biodegradation of Degreaser in freshwater**

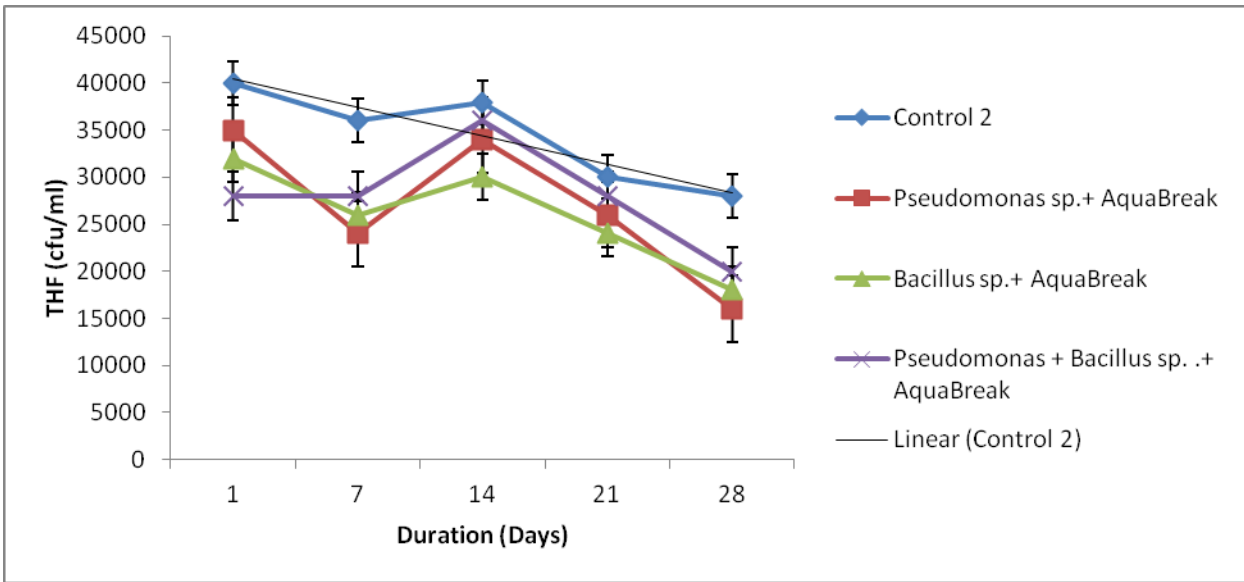

**Fig.8: Changes in the Total Heterotrophic Fungi (THF) (cfu/ml) Count for Aquabreak during Enhanced Biodegradation of Degreaser in freshwater**

The relative occurrence of specific genera of bacteria could be used as an index of the pollution status or biodegradation potential of an environment [19]; this fact clearly emphasizes the thought that the significance of occurrence may be due to the fact that *Pseudomonas* and *Bacillus* are more adapted to survival and biodegradation capabilities in freshwater environment. The relative occurrence of specific genera of bacteria could be used as an index of the pollution status or biodegradation potential of an environment [20]; this fact clearly emphasizes the thought that the significance of occurrence may be due to the fact that *Pseudomonas* and *Bacillus* are more adapted to survival and biodegradation capabilities in freshwater environment. Degreaser utilizing bacteria isolates were *Pseudomonas*, *Bacillus*, *Micrococcus* and *Enterobacter*, with *Bacillus* species having the highest frequency of 42%, followed by *Pseudomonas*, with the frequency of 26%, *Micrococcus* and *Enterobacter* had 16% (Figure 9) while fungi genera were; *Aspergillus*, *Penicillium*, *Rhizopus* and *Mucor*. These group of microorganisms are no doubt the normal flora of any situation that has to do with dulling fluid or mud in most familiar studies while fungi genera were; *Aspergillus*, *Penicillium*, *Rhizopus* and *Mucor*. These groups of microorganisms is no doubt the normal flora of any situation that has to do with dulling fluid or mud in most familiar studies.

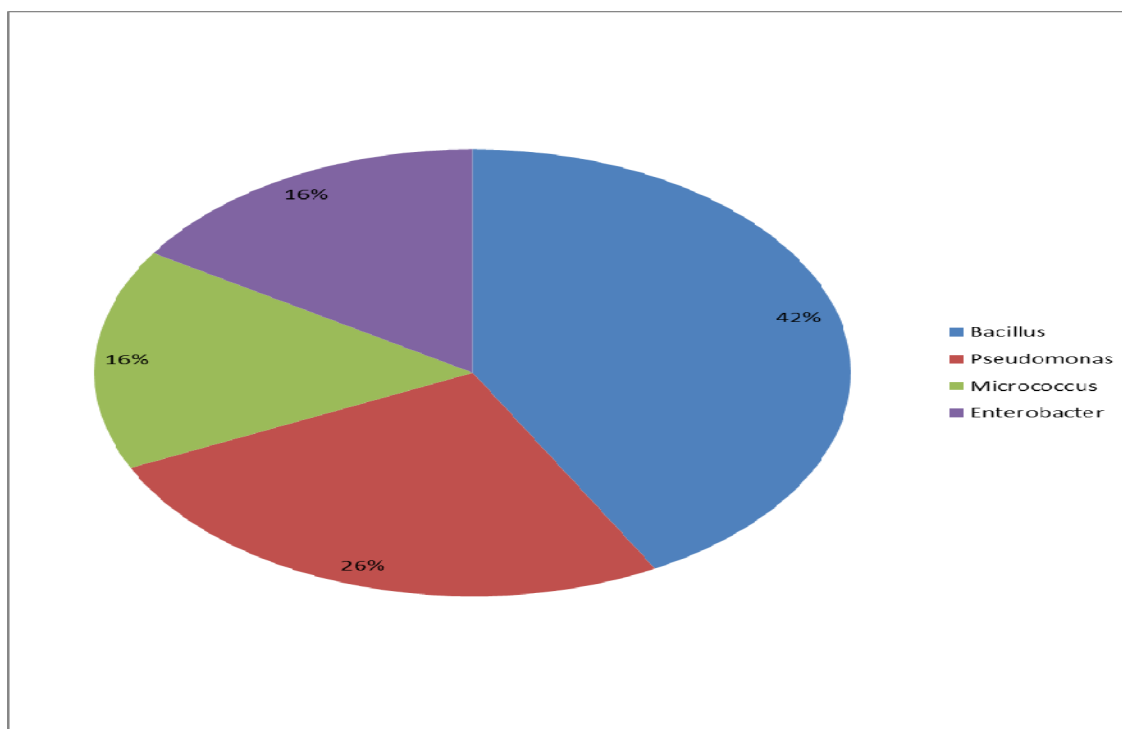

**Figure 9: Percentage of Occurrence of the Bacterial Isolates from freshwater ecosystem**

#### 4. CONCLUSION AND RECOMMENDATION

Conclusively, the study showed that bio-augmenting bacteria *Bacillus* species has high potential to enhance degradation of both Rigwash and Aquabreak polluted freshwater when compared to *Pseudomonas* species and consortium of both bio-augmenting bacteria used as biodegradation enhancers. More so the result indicates that Rigwash has low biodegradation potential than Aquabreak in freshwater Ecosystem.

Therefore it is recommended that since most oil well drilling activities in Nigeria are carried out in aquatic environment, *Bacillus* species could be used to enhance biodegradation the degradation of degreaser contamination in freshwater ecosystem

#### REFERENCES

- Orji FA, Ibiene AA, Dike EN. Laboratory scale bioremediation of petroleum hydrocarbon-polluted mangrove swamp in the Niger Delta using cow dung. *Malaysian Journal of Microbiology*. 2012;8(4): 219-228.
- Pearl HW, Paul VJ (2012). Climate changes- link to global expansion of harmful Cyanobacteria. *Water research*. 2012;46(5):1349 – 1363
- Roling WFM, Milner MG, Jones DM, Lee K., Daniel F, Swannell RPJ, Head IM. Robust hydrocarbon degradation and dynamics of bacterial communities during nutrient-enhanced oil spill bioremediation. *Appl. Environ. Microbiol.*, 2002;68:5537-5548.
- Williams JO, Agunkwo M. Remediation of Crude Oil Polluted River using *Nostoc* and *Oscillatoria* spp, *Journal of Biology and Genetic Research*. 2018;4:2545-5710

5. Ruberto L, Dias R, Balbo AL, Vazquez SC, Hernandez EA, Cormac WPM. Influence of nutrients addition and bioaugmentation on the hydrocarbon biodegradation of a chronically contaminated Antarctic soil. *Journal Appl. Microbiol.*, 2006;106:1101-1110.
6. GESAMP. Marine biodiversity pattern, threats and conservation needs. 1997.
7. Cole MG. Assessment and remediation of petroleum contaminated sites. CRC Press, Boca Raton, FL. 1994;63.
8. Okpokwasili GC. Biodegradation potentials of microorganisms isolated from car engine lubricating oil. *Tribol Int* 2003;21:215-220.
9. Nrior RR, Wosa C. Biodegradation of oil spill dispersant in brackish water ecosystem of the Niger Delta, Nigeria. *Journal of International Society of Comparative Education, Science and Technology (ICEST)* 2016;3:187-201.
10. Nrior RR, Odokuma LO. Ultimate Biodegradability potential of Trichloroethylene (TCE) used as Degreaser in marine, brackish and freshwater *Journal of Environmental Sciences, Toxicology and Food Technology (IOSR-JESTET)* 2015;9:80-89.
11. ATSDR (Agency for Toxic Substances and Disease Registry). Toxicological profile for trichloroethylene, US Department of Health and Human Services. 1997
12. Vidali M..Bioremediation, An overview .*Pure Appli. Chem.*, 2001;73:1163-1172.
13. Prescott LM, Harley JP, Klein DA. Microbiology. 6th ed. McGraw Hill. 2005.
14. Nrior RR, Kpormon LB. Comparative ecotoxicological analyses of spent phone batteries on *Pseudomonas* sp. in tri aquatic environment. *Current Journal of Applied Science and Technology*. 2018;27(6):1-11.
15. Holt JG, Krieg NR, Sneath PHA, Stanley JT, Williams ST. *Bergey's Manual of Determinative Bacteriology*. 9th Ed. Williams and Wilkins Company, Baltimore, USA. 1994;71-561.
16. Cheesebrough M. *District Laboratory Practice in Tropical Countries*. Part 2, Cambridge University Press, London, UK. 2000;143 – 156.
17. Nrior RR, Ogbonna DN and Alabo AE (2017) Biodegradation of Drilling Fluid used in Upstream Sector of the Nigeria Petroleum Industry in Marine Water Environment *International Journal of Waste Resources* 7(4):302-306
18. Odokuma LO, Nrior RR. Ecotoxicological evaluation of industrial degreaser on *Nitrobacter* sp. *Journal of International Society of Comparative Education, Science and Technology*. 2015;2(2):356-365
19. Okpokwasili GC, Amanchukwu SC. Petroleum hydrocarbon degradation by *Candida* species. *Environmental International*. 1988;14: 243-247.
20. Williams JO, White SP. Impact of Disinfectants on Antimicrobial Potentials of Some Microorganisms. *Journal of Pharmacy and Biological Sciences* 2013;10-107: 2319-7676