

ANALYSIS AND EVALUATION OF SPECIFIC ABSORPTION RATE OF GSM SIGNAL IN PORT HARCOURT, NIGERIA

Abstract: There is a growing concern in the world and even Nigeria that residents who stay close to GSM base facilities are exposed to electromagnetic radiation which causes different health illness like cancer, leukemia, memory lost, dizziness, fatigue, severe headache among others. This study puts to rest the position on the effect of radiofrequency (RF) radiation from GSM masts on human health. In this research work, the evaluation and assessment of radio frequency radiation in five selected mobile base stations facilities in Obio/Akpor Local Government of Rivers State, Nigeria were carried out using an EMF meter for measurement of Electric field. The handheld device is a broadband device which monitors high frequency radiation in the range of 50MHz – 3.6GHz and it has isotropic (three axis) sensor measurement mode. The measurement of the radio frequency radiation with the EMF meter was conducted from 0 – 300m away from the selected base transceivers stations facilities of the selected telecommunication operators (MTN, Globacom and Airtel) in Nigeria. The data obtained from the research were analyzed using Specific Absorption Rate formula to establish the fact whether with time exposure to RF radiation will have negative impact on human health. The normal specific absorption rate (SAR) and the Power Density for the general public whole body was assessed from the measured electric field strength and the values gotten were compared with International Commission on Non Ionization Radiation Protection (ICNIRP). The results shows that the average amount of SAR for the selected five BTS facilities are within the range of 0.0037w/kg – 0.0084w/kg and the power density 1.5183w/m² – 9.5083w/m². These values are lower than the recommended limit by International Commission on Non-Ionization Radiation Protection (ICNIRP) which is 0.08w/kg for the whole human body. This study make known that there is inconsequential effect on human health because the non-ionizing electromagnetic energy has no sufficient energy to affect any part of human body for the residents living close to the selected BTS facilities of the various telecommunication providers.

Keywords: Electromagnetic Field, BTS, SAR, ICNIRP.

1. INTRODUCTION

Telecommunication facilities require a network of towers, antennas and associated structure to host the network devices. Habitually, slope tops are great areas since they empower signals to be picked up from and transmitted to an expansive zone. With increasing demand for mobile telephone services as a result of high population and technology awareness, there has been a significant increase in the demand for such facilities. Today in Nigeria, masts are erected even in the compounds of living homes with little or no consideration of the effects on the health of the people. This study is to find out the amount of radiation emanating from these BTS facilities and check immediate and long-term impact if there are any on the environment and the people living very close to these facilities.

This study evaluates the electromagnetic field of selected base stations of telecommunication service providers of MTN, Globacom and Airtel within some communities (Rumuolumeni, Rumuchakara, Akwaka, Woji and Elioizu) of Obio/Akpor local government of Rivers State. The study is aimed at analyzing and evaluating specific absorption rate (SAR) due to GSM BTS signals and check if they meet International Commission on Non-Ionization Radiation Protection (ICNIRP) standards and limit.

The result of this research work can serve as a working document for imminent radio frequency (RF) radiation from the selected BTS facilities because there has not been any research carried out in the mapped-out area to the knowledge of the researcher.

1.1. literature Review on Electromagnetic Field from Base Transceiver Station Facilities

Both positive and negative electric charges generate electric field in a stable or moving situation. The current caused by moving charges is main source of magnetic field. Time varying electric and magnetic fields are accompanied to each other to produce an electromagnetic field. After that, electromagnetic waves which radiate from BTS facilities are produced by these time varying electromagnetic fields [1]. Related work [2] in their study observed that the electromagnetic radiation emitted by mobile phone base stations was measured in terms of electric field strength as a function of distance. The measured values were used to calculate specific absorption rate of the skin and brain tissue to assess the health risks. Certain directions were found to be safer than the other directions. Results shows that the values of the SAR for the eight base stations selected for the study were within the range of 0.00010W/Kg- 0.0012W/Kg. Also, [3-4] in their studies showed that long term exposure to radiation from the base stations causes different ailment such as cancer cases, counting lings, prostate, breast and lungs cancer. Other forms of ailment caused by mast location as reported are that of leukemia, lymphoma and hematopoietic which damaged blood cells, untimely death, fever, migraine as a result of vibration and contamination of environment due to different exercises of generators and mast establishment. They found out that there is a substantial relationship between mast location and health of the inhabitants. Santini *et al* [5] confirmed further the effect of telecommunication mast on the health of people of United Kingdom in which they observe that mast operators around the Northern United Kingdom were inquired by the inhabitants and local authority to clear their telecommunication masts due to the negative impacts on the inhabitants. They reported twenty-seven (27) cases of collapsed masts tower as a result of weather problem.



Figure 1. Picture of MTN Mast visited at Rumuolumeni



Figure 2. Picture of Airtel Mast Visited at Akwaka

2. METHODOLOGY

2.1. Materials and Methods

A detailed procedure was followed to determine the existence of the masts inside residential areas. This study emphasizes a lot of on the quantity of electromagnetic radiation emanating from these GSM base transceiver stations (BTS) in Obio-Akpor local government area. The materials and instruments used in the study are Measuring Tape, Stop Watch, TES – 593 Electromog (EMF) Meter, Data Recording Sheet, GPS Meter and Mobile Phone.

The Electromog meter by TES Electrical Electronic Corporation USA (model TES-593 serial No 006P 9V-090200180) was used for the measurements. The device is a handheld broadband meter for detecting high-frequency radiation in the range from 50MHz - 3.5GHz. It is a non-directional digital 3-axis radio frequency (RF) handling meter, potable and low-cost RF. It is an effective meter for digital RF signals and equally very sensitive.



Figure 3. TES – 593 Electromog (EMF) Meter

2.2 Measurement Approach

For each of these locations, measurements from GSM BTS facilities were measured in five different locations in Obio/Akpor LGA. The data were collected from the three major telecommunication operators (MTN, Globacom and Airtel) masts to ascertain the amount of radiations emitted from these base stations. The masts are located at Rumuolumeni, Akwaka, Rumuchakara, Elioizu and Woji all in Obio/Akpor Local Government of Rivers State, Nigeria. For each of these locations the measurements of electromagnetic radiation were taken at 50m, 100m, 150m, 200m, 250m and 300m in every 10 minutes.

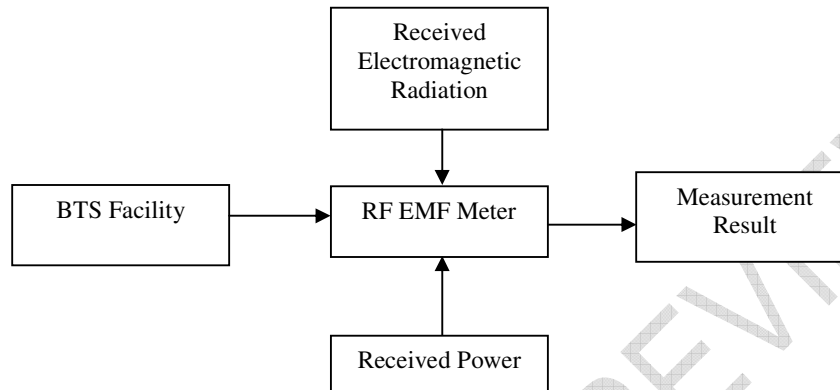


Figure 4. Block Diagram of Measurement

In order to collect accurate and reliable data the three telecoms companies (MTN, Globacom and Airtel) visited with different locations are shown below

Table 1. Network operator and Locations.

S/N	SITE ID	LOCATION	COORDINATE (Degree)
1	MTN 4232	Rumuolumeni – 3 Ohiamati street, Police post bus stop.	Longitude: 7.05659099 Latitude: 4.785383159
2	IHS_PHC 116	Choba – Rumuchakara Road, Choba	Longitude: 6.995768598 Latitude: 4.830232823
3	IHS_PHC161	Rumuodumaya – Akwaka Road	Longitude: 7.0364968 Latitude: 4.8716169
4	MTN 3456	Elioizu – New Elioizu Road	Longitude: 6.987324968 Latitude: 4.905511315
5	PAR 174	Woji – Abec Road, off ALCON	Longitude: 7.061797107 Latitude: 4.872241849

2.3 SAR Evaluation and Standards

Specific Absorption Rate (SAR) is the quantity of energy at which the human body can absorb when exposed to radiofrequency electromagnetic field. SAR distribution is with the aid of deriving it from Maxwell's equations. E and H are first determined analytically or numerically from Maxwell's equations. The unit of SAR is Watt per

Kilogram (W/Kg). It can be calculated from **E** using the equation [6]. An EMF meter detects the electric field strength **E** and converts it into magnetic field strength **H** and also the power density **S**. The meter measures **E** along three different axis but can also take readings of all the **E**s' at the same time when set to the triaxial mode of operation. The electric field (**E**), the magnetic field (**H**) are all related to power density (**S**) expressed in Watts per Meter squared (W/m²) as shown in the equation below.

$$S = EH = \frac{E^2}{377} = 377\Omega H^2 \quad (1)$$

where 377 Ω is the characteristic impedance of free space

$$SAR = \frac{\sigma / E I^2}{\rho} \quad (2)$$

Where σ is the electrical conductivity (S/m)

E is the electric field strength (V/m)

ρ is mass density of the medium (kg/m³)

Using the electric fields, the dissipated power density, S in any tissue can also be calculated using the following equation:

$$S = \sigma |E|^2 = \rho SAR \quad (3)$$

This also implies that;

$$SAR = \frac{\sigma / E I^2}{\rho} = S \quad (4)$$

Equation (2) is a point equation, so it is often called the resident SAR. The space-average SAR for a body or a part of the body is obtained by calculating the resident SAR at each point in the body and averaging over the part of the body being considered.

Table 2. Summary of ICNIRP's General Public Safety Guidelines for Limiting Radiation Exposure and SAR.

Frequency	E-Field (V/m)	H-Field (A/m)	Power density(W/m ²)	Whole body SAR(W/kg)	Localized (head) (W/kg)
400-2000 MHz	1.375f ^{1/2}	0.003f ^{1/2}	f/200	0.08	2
2-300 GHz	61	0.16	10	0.08	2

Table 3. Summary of Average SAR and Power Density at Distance 50m – 300m

Site	Network Provider	SAR	Power Density
Rumuchakara	MTN	0.0066	4.9466
Awaka	Airtel	0.0037	4.1083
Woji	Globacom	0.0084	9.5083
Rumuolumeni	MTN	0.0043	1.5183
Eliozu	Globacom	0.0052	2.5267

3. RESULTS AND DISCUSSION

The analysis of the results was done by determining the specific absorption rate (SAR) and graphical analysis in order to establish the fact that whether exposure to GSM base station has effect or no effect on human health for a long period of time. All the telecom service providers used (MTN, Globacom and Airtel) antenna were made to radiate 1800 MHz; they have the following specifications Globacom, MTN and Airtel have down link frequency of 1820 – 1835 MHz, 1835 – 1850 MHz, 1850 – 1865 MHz, uplink frequency of 1725 – 1740 MHz, 1740 – 1755 MHz and 1756 – 1770 MHz, respectively. Shown in figures 5 and 6 below are the variations of SAR and power density with distance for all the 5 base station sites used for this study. Summarized in figure 7 and 8 are the average SAR and power density values for the 5 base stations for site comparison.

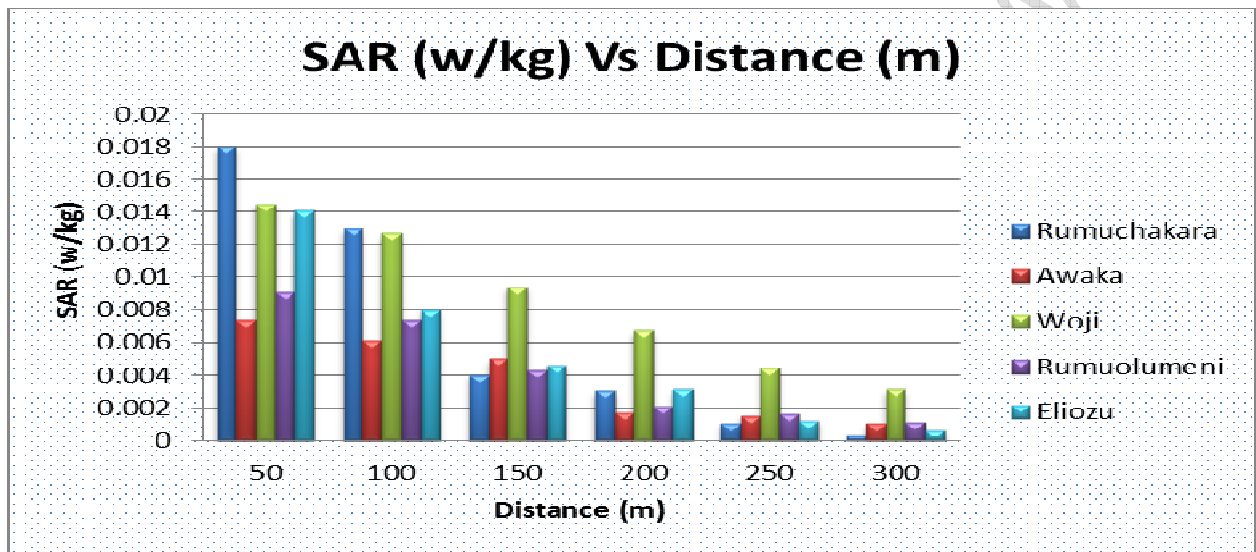


Figure 5: SAR versus Distance from the five selected BTS Stations

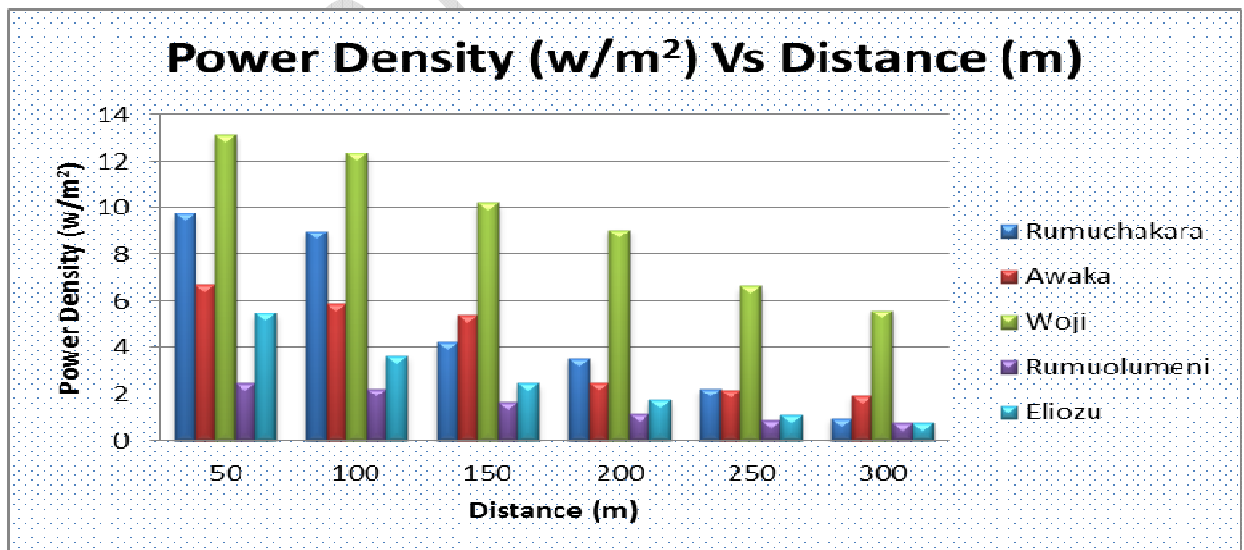


Figure 6: Power Density versus Distance from the five selected BTS Stations

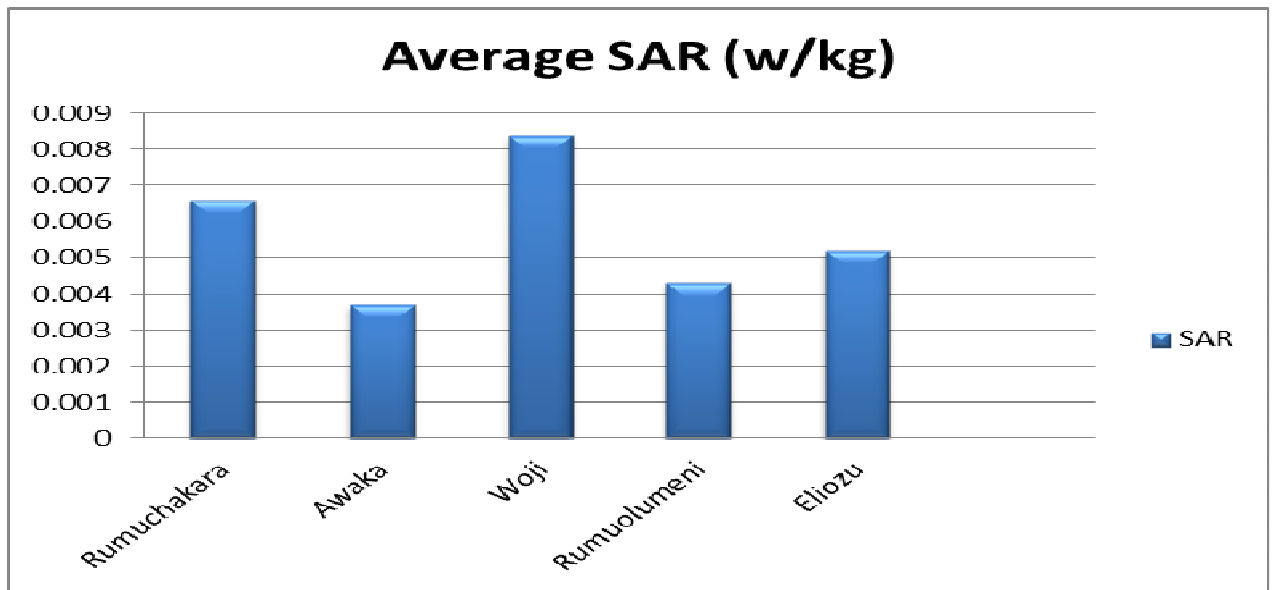


Figure 7: Average SAR from the five selected BTS Stations

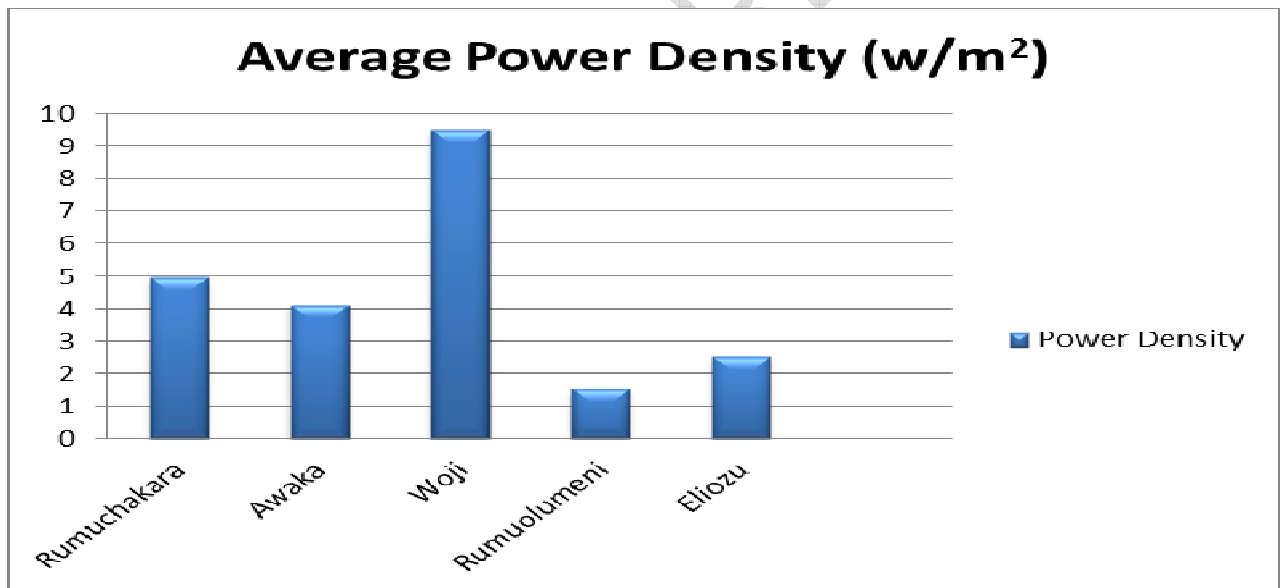


Figure 8: Average Power Density from the five selected BTS Stations

3.1 Compared Result and ICNIRP Standards

As can be seen in figure 9 and 10 below, the highest radiation levels were observed at a distance of 50m, 100m and 150m from sites 1-5 respectively and the SAR values in W/Kg ranged from 0.0037w/kg – 0.0084w/kg and power density ranged from 1.5183w/m² – 9.5083w/m² which are quite lower than the maximum safety standard limit (0.08W/Kg for whole body exposure) set by the International Commission on Non-ionizing Radiation protection (ICNIRP). The ICNIRP standards states that for any frequency between 400-2000MHz used, it must be divided by 200 (f/200) to get required limit for power density. The Telecommunication service providers used (MTN, Globacom and Airtel) antenna radiate between 900 - 1800MHz; this implies that the limit for power density for this research work is:

$$f = 1800$$

$$f/200 = 1800/200 = 9.00w/m^2$$

From figure 10 it shows that the highest power density came from the Woji base station (9.5083w/m^2) which is slightly high from 9.00w/m^2 with a difference of 0.5083w/m^2 .

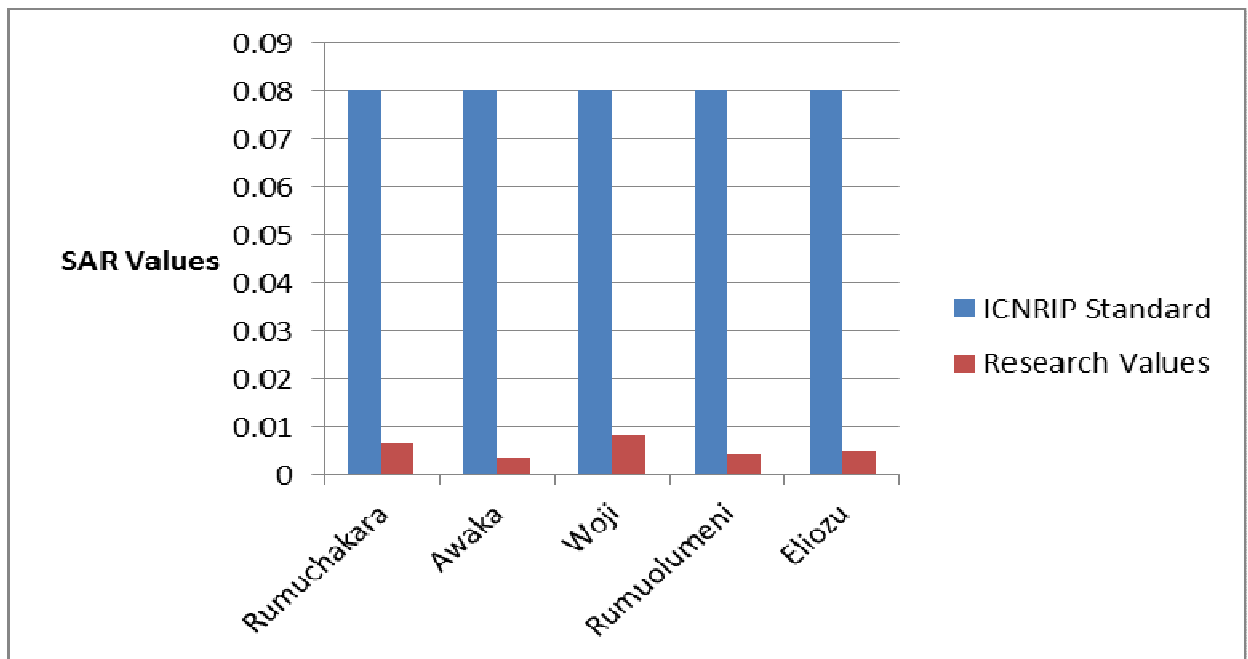


Figure 9: ICNIRP SAR Standards and Research Values.

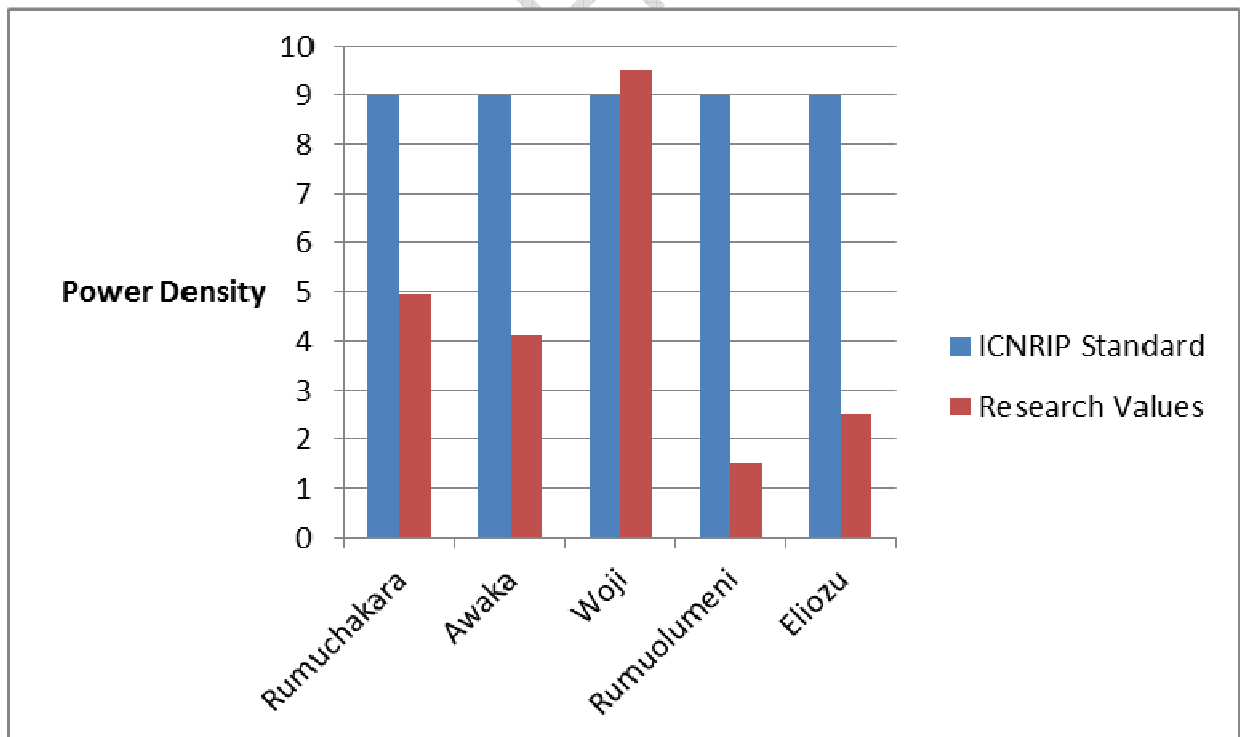


Figure 10: ICNIRP Power Density Standard and Research Values.

3.2 Root Mean Square Deviation

The root-mean-square deviation (RMSD) or root-mean-square error (RMSE) is a frequently used measure of the differences between values (test and population values) predicted by a model or an estimator and the values really observed. It serves to aggregate the extents of the errors in forecasts for different times into a single measure of prescient power [7]. The Root Mean Square Deviation is given by [8]:

$$\text{RMSD} = \sqrt{\frac{\sum_{i=1}^N (x_i - \hat{x}_i)^2}{N}} \quad (5)$$

Where:

x_i = the actual observation values

\hat{x}_i = the estimated or forecasted standard limit given value

N = the number of data entry

Table 4 Summary of RMSD for SAR and Power Density

Location	RMSD (SAR)	RMSD (Power Density)
Woji	0.071654	2.7969
Eliozu	0.074877	6.67188
Awaka	0.076257	5.2681
Rumuolumeni	0.072794	7.5104
Rumuchakara	0.073746	5.2294

Table 4 shows that even with the fluctuations of radiation the root mean square deviation values for specific absorption rate and the power density for the different locations falls within the ICNIRP set standards.

4. CONCLUSIONS

The electromagnetic radiation emitted by mobile phone base stations was measured in terms of electric field strength as a function of distance. The measurements were done in 5 BTS stations belonging to three different GSM network (MTN, Globacom and Airtel) operators in the study locations. The measured values were used to calculate specific absorption rate of the whole-body tissue and power density to assess the health risks. Certain directions were found to be safer than the other directions. Results shows that the values of the SAR and power density for the five base stations selected for the study are within the range of 0.0037W/Kg - 0.0084W/Kg and 1.5183W/m²- 9.5083W/m² respectively. These values are quite lower than the limit by International Commission on Non-ionizing Radiation Protection (ICNIRP) which is 0.08W/Kg [9] for the whole-body average SAR. This shows that there is no significant health risk for the residents that stay in the vicinity of the selected base stations for the various mobile service provider of the area.

COMPETING INTERESTS DISCLAIMER:

Authors have declared that no competing interests exist. The products used for this research are commonly and predominantly use products in our area of research and country. There is absolutely no conflict of interest between the authors and producers of the products because we do not intend to use these products as an avenue for any litigation but for the advancement of knowledge. Also, the research was not funded by the producing company rather it was funded by personal efforts of the authors.

REFERENCES

- [1] Cheng, D. (2002). "Field and Wave Electromagnetics" (2nd ed.), London: Prentice Hall.
- [2] Isabona, J. & Ojuh, O. D. (2015). "Experimental Assessment of Specific Absorption Rate Using Measured Electric Field Strength in Benson Idahosa University and Environs". American Journal of Modern Physics. Vol. 4, No. 2, pp. 92-96. doi:0.11648/j.ajmp.20150402.16
- [3] Abdel, Rassoul, G., Abou, E. I., Batanouny & Salem, M.E. (2007). "NeuroToxicology: Neurobehavioral Effects among Inhabitants around Mobile Phone Base Stations". Pg (434-440).
- [4] Onifade, A.O., Ikotun, S.A., Opejin A.O., & Ibraheem, B.A. (2011). "Health Implication of Mast location in Urban Area". A case study of Egbeda L.G.A. of Oyo State.
- [5] Santini, R., Santini, P., Danze, J.M, Le Ruz P., & Seigne, M. (2002). "Investigating on the health of people living near mobile telephone relay station". PatholBol, Paris. 50 (6) (page 369-373).
- [6] Thors, B., Strydom, M., Hansson, B., Meyer, F., Krkkinen, K., Zollman, P., Ilvonen, S. & Tornevik, C. (2008) "Estimation of SAR and compliance distance related to RF exposure from mobile communication base station antennas". IEEE Trans. Electromagnet. Compact, vol. 50, no. 4, pp. 837-848.
- [7] Hyndman, Rob, J., Koehler, Anne, B. (2006). "Another look at measures of forecast accuracy. International Journal of Forecasting". 22 (4): 679-688. doi: 10.1016/j.ijforecast.2006.03.001
- [8] Tsay, Ruey, S. (2005); "Analysis of Financial Time Series"; John Wiley & SONS. ISBN 0-471-690740.
- [9] International Commission on Non Ionization Radiation Protection [ICNIRP] (1998). Guidelines for limiting exposure to time-varying electric, magnetic and electromagnetic fields (up to 300 GHz). Health Physics, Vol.74, 494-522.