

CHARACTERIZATION OF ENGINEERING PROPERTIES (ELECTRICAL PROPERTIES) OF RUBUS FRUTICOSUS

ABSTRACT

Some engineering properties of *Rubus Fruticosus* fruits, nuts and nutshell were characterized in order to provide fundamental information about their properties that will aid in designing modern technology for their handling, processing, storage, preservation, quality evaluation, distribution and marketing. The engineering properties studied is electrical properties. The fruits and nuts were conditioned to five and three different moisture and three and four different temperature levels, respectively before testing. American Standards for Testing and Materials (ASTM) and American Society of Agricultural and Bioresources Engineering (ASABE) standard procedures were used to test all the properties considered. Genstat, Mathlab, JMP in SAS, Duncan in SPSS and Microsoft excel statistical packages were used to analyze the generated data and the means were compared using the analysis of variance (ANOVA) at 5% level of probability. Dielectric constant and loss factor of both fruits decreased with increase in frequency (200MHz – 20GHz) and increased with temperature. This information is recommended for design and development of efficient and effective technology for mechanizing *Rubus Fruticosus* products.

Keywords: Conductivity of dielectric, dielectric constant, Loss factor, Depth of microwave penetration

1. INTRODUCTION

Since man started discovering and cultivating various types of food, there has never been food without work or work for abundant food without machines. The effectiveness of these machines for mechanizing agricultural production depends on adequate knowledge of engineering properties of the products to be mass produced. Mechanization involves replacing human and animal labour with mechanical devices in crop production, processing, storage and distribution. It reduces production cost, ensures timeliness, and optimizes and protects product quality (Adamade and Jackson, 2014).

In handling and processing of agricultural products, some fundamental information about their characteristics is essentially needed. This information can be obtained through the knowledge of engineering properties of the products which constitutes essential data in designing and developing modern technologies for their production, handling, processing, storage, preservation, quality evaluation, distribution and marketing.

Engineering properties of agricultural product is profitably used for mechanizing their planting, harvesting, drying, processing and storage. It improves working efficiency of processing equipment, reduces losses and waste of constructional materials and, saves time and money. It also helps to maintain quality even in adverse storage and handling conditions and offer ways in which products can be utilized effectively. In recent time, strong growing interest on tree crop for food, money and medicine has been ongoing. This is because there is high demand of food due to effects of development and increasing population, besides, many economic tree crops are fading away without being harnessed and replaced.

Tree crops are those perennial woody plants with a single elongated stem of about 3m high and above (Orwa *et al.*, 2009) and, have head of branches and foliage on which fruits

44 grow. The fruits of tree crops are of great interest to food scientists, food producers and other
45 scientists who work towards achieving food security. Modern agriculture has led to handling
46 and processing of agricultural products into more useful product through various unit
47 operations like cleaning, grading, sorting, drying, dehydration, storage, milling and
48 transportation. *Rubus Fruticosus* fruit is an edible fruit from *Rubus Fruticosus* tree. It is eaten
49 boiled or fresh for its nutritional and medicinal values.

50 Nigeria is blessed with a lot of economic tree crops that are rich in food and medicinal
51 values. Development and high quest for foreign food have led to the abandonment of these
52 crops; as a result, they are gradually fading away, attracting effect of desertification to our
53 environment.

54 The agro-industries are dying down due to over dependent on root, tubers, vegetables and
55 grains for raw materials. These products have a lot of competition which increases their price;
56 hence the industries find it difficult to cope due to little or no profit margin. *Rubus Fruticosus*
57 fruits are protenious and contain edible oil which waste away in the farm annually and when
58 harvested, a lot of losses are encountered due to low patronage. Processing of this important
59 fruit is still by conventional method which encourages losses of both oil and kernel, is
60 unhygienic and subjects the fruits to vagaries of heat treatment which results in poor quality
61 oil. Olawale (2012) reported that the extraction of oils from elemi pulp and kernel are not
62 being carried out at commercial level at present, despite ready availability of the fruit in large
63 quantity in Nigeria and elsewhere in Sub-Sahara Africa. This situation would improve if data
64 needed for the design and operation of the oils' extraction plants are available. *Rubus*
65 *Fruticosus* nuts which house the kernel are usually thrown away after eaten the mesocarp,
66 causing environmental pollution and loss of biomass resources for alternative energy
67 generation. These are as a result of limited knowledge of engineering characteristics of this
68 important fruit and nuts that will promote mechanization of its processing into other useful
69 products.

70 Oni (2011) reported in his inaugural lecture that good number of machines and
71 equipment targeted at agro-industries are substandard and break down frequently. This
72 problem could be because of wrong choice of construction materials, which could be
73 attributed to poor knowledge of engineering characteristics of the targeted agricultural
74 product. Besides, the efficiency of most of the imported processing machines are too poor
75 because they were produced and calibrated based on the engineering data of agricultural
76 products obtained from the manufacturing countries causing maintenance challenges and
77 abandonment of these machines.

78 Literature has revealed that several studies have been carried out on engineering properties of
79 different agricultural products; chick pea seeds (Konak *et al.*, 2002), millet
80 (*Pennisetum glaucum* L.) (Ndirika and Oyeleke, 2006), *lablabpurpleus* (L) (Simonyan *et al.*,
81 2009), *Jatropha curcas* L. fruit, nut and kernel (Sirisomboon *et al.*, (2007), *Jathrophacurcas*
82 L. seed (Kabutey, *et al.*, 2011), African yam bean (*Sphenostylis stenocarpa*) (Irtwange and
83 Igbeka, 2004), water melon (Nelson *et al.*, 2007), orange (Hassan, 2002), rice (Kawamura *et*
84 *al.*, 2003). Despite all these studies, there has not been any published work on engineering
85 properties of *Rubus fruticosus* fruits. The objective of this study is to investigate the electrical
86 properties of *Rubus fruticosus* fruits.

87

88 2. MATERIALS AND METHODS

89 2.1 ELECTRICAL PROPERTIES OF THE FRUITS

90 Electrical property involves heating the product due to its own electron losses when placed in
91 an electrostatic field. Electrical properties are normally described in terms of dielectric

92 property of the product which include dielectric constant (ϵ') and loss factor (ϵ'') (Wang *et*
 93 *al.*, 2003).

94 The dielectric constant of a material is associated with the energy storage capability in the
 95 electric field in the material and the loss factor (dissipation factor) has to do with the energy
 96 dissipation or absorption due to conversion of electric energy to heat energy in the material.
 97 The dielectric constant and loss factor are usually influenced by the volume of air void in
 98 sample, moisture content and temperature, frequency as well as chemical composition of the
 99 product (Nelson, 1982). In complex permittivity of most

100 materials, dielectric constant (ϵ') and loss factor (ϵ'') are expressed as real and imaginary part
 101 of the permittivity (ϵ) as shown in Eq. 1 (Nelson, 2008):

102 $\epsilon = \epsilon' - j\epsilon''$ (1)

103 The loss tangent is given as, Eq. 2:

104 $\tan \delta = \frac{\epsilon''}{\epsilon'}$ (2)

105 Dielectric properties of *Rubus Fruticosus* fruits were experimented at frequency range of 50
 106 MHz – 40 GHz using dielectric analyzer (S – Parameter 8722ES). Samples of moisture
 107 content (5, 15, 30, 45, 60% (wb)) were conditioned to temperatures of 50 °C, 65 °C and 80 °C
 108 using water bath. These moisture and temperature levels were chosen considering samples
 109 under dried and softening conditions. The hot samples were quickly transferred to the probe
 110 of the calibrated system which measures and displays the fruits dielectric constant and loss
 111 factor automatically. Dissipation factor and depth of penetration were calculated as shown in
 112 Eqs 3 and 4, respectively.

113 $\tan \delta = \frac{\epsilon''}{\epsilon'}$ (3)

114 $D_p = \frac{c}{2\pi f \sqrt{2\epsilon' \left[\sqrt{1 + \left(\frac{\epsilon''}{\epsilon'}\right)^2} - 1 \right]}}$ (4)

115 Where: c = speed of light (3×10^8 m/s), D_p = depth of penetration (mm)


116 The experiment was replicated three times for each temperature and moisture content studied.

117 **3. RESULTS AND DISCUSSION**

118 **3.1 ELECTRICAL PROPERTIES OF RUBUS FRUTICOSUS FRUITS**

119 **3.1.1 Effect of moisture content and frequency on ϵ' and ϵ'' of the fruits**


120 Fig. 1 and 2 showed the dielectric properties of *Rubus Fruticosus* fruits as a function of
 121 frequency at five different moisture contents. The dielectric constant (ϵ') and loss factor (ϵ'')
 122 for both long and short fruits decreased with increase in frequency and increased as moisture
 123 content rises from 5.00% – 60.00% wet basis. The dielectric constant (ϵ') for short and long
 124 fruits increased from 2.06 – 6.79 and 1.12 – 33.68 respectively as moisture content increased
 125 from 5.00% – 60.00% wet basis. Loss factor (ϵ'') for short and long fruits also increased from
 126 0.6594 – 5.99 and 1.22 – 14.99, respectively.

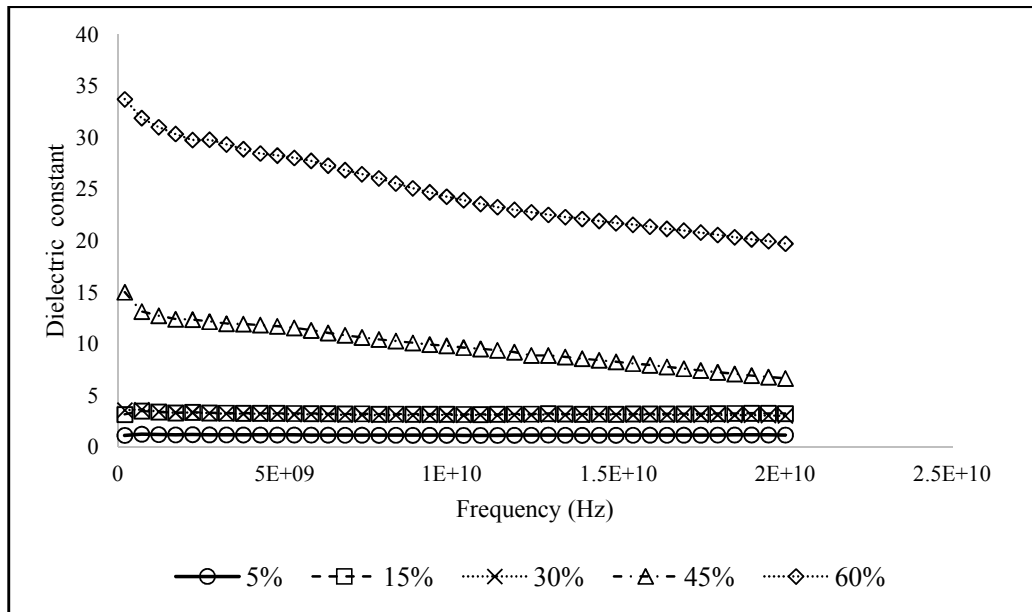

127

128

Fig 1a

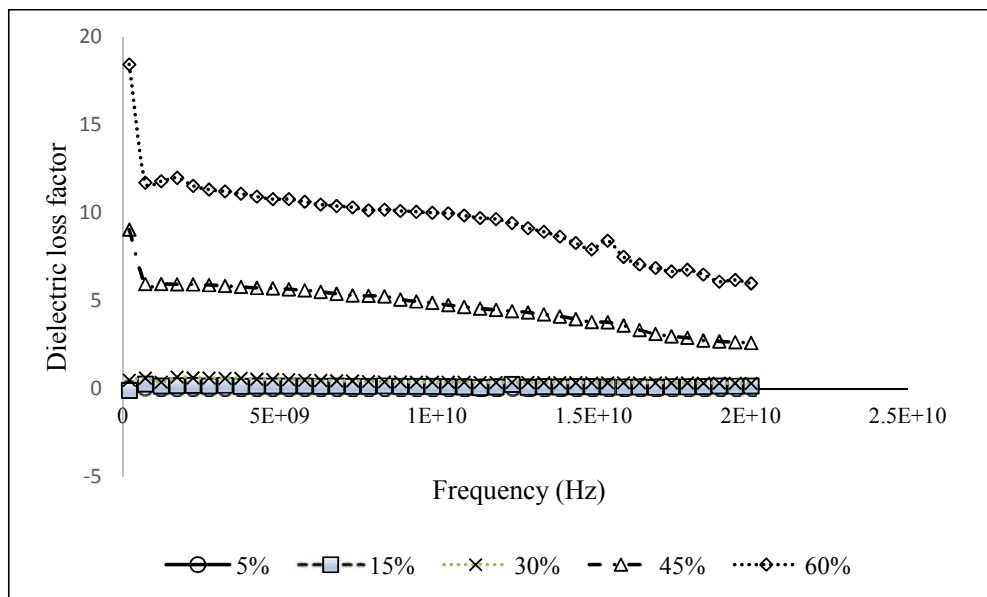


129

130

Fig 1b

131 **Figure 1:** The dependence of *Rubus Fruticosus* long fruits (a) dielectric constant and (b)
 132 dielectric loss factor on moisture content wet basis.

133

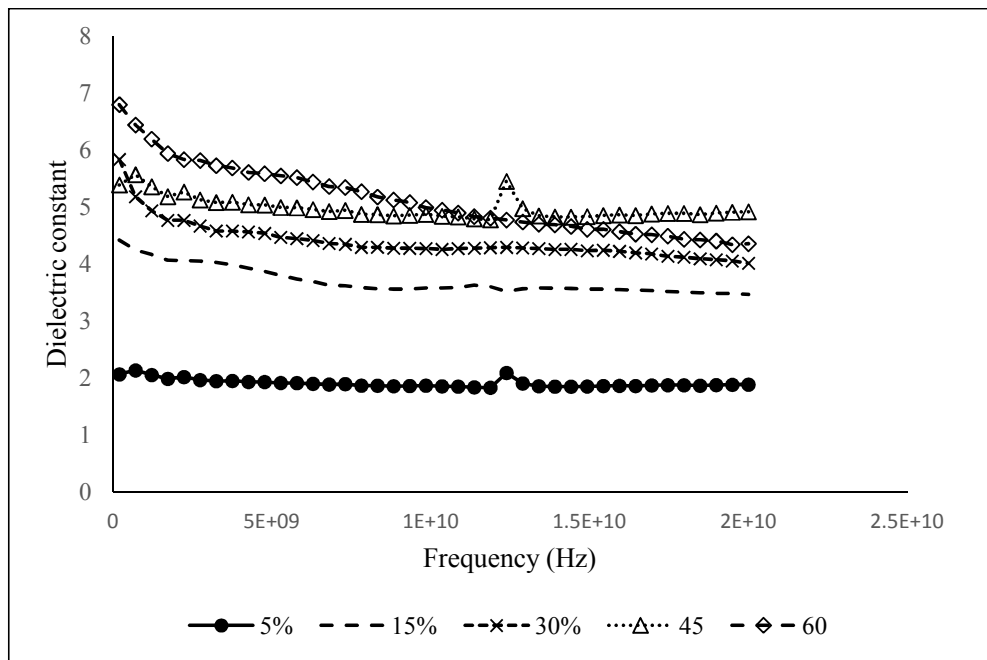


134

135

Fig. 2a

136

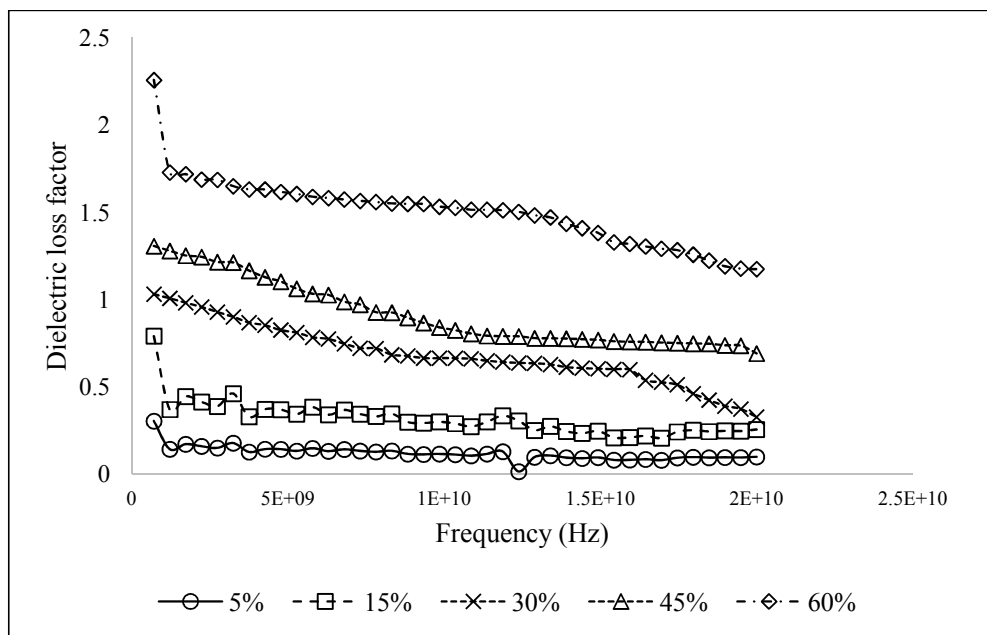

137

138

Fig. 2b

139 **Figure 2:** The dependence of (a) dielectric constant and (b) dielectric loss factor of *Rubus*
 140 *Fruticosus* short fruits **on moisture content.**

141

142 At lower moisture content (5% wet basis), ϵ' and ϵ'' of both fruits are very low throughout the
 143 frequency range studied except ϵ' of short fruit. The reduction in ϵ' with moisture content and

144 frequency was reported to be due to low dispersion of water molecules caused by the effects
 145 of relaxation process and ionic conduction (Feng *et al.*, 2002). Long and short fruits had the
 146 lowest value of ϵ' at 10GHz and 11GHz under dry condition (5.00% wet basis). respectively
 147 while under wet condition (60.00% wet basis) both fruits attend the lowest values at 20GHz.
 148 Ikediala *et al.*(2000) and Feng *et al.*(2002) observed similar trend with apple fruits at lower
 149 moisture content.

150 ANOVA at 5% level of significance summarized in Table 1 also revealed that moisture
 151 content and frequency had high significant effect on ϵ' and ϵ'' .

152

153 **Table 1:** ANOVA of dielectric properties of *Rubus Fruticosus* fruits as a function of
 154 moisture content

Size	Dielectric property	F- value	P- value	F - critical
Long	ϵ'	1315.51**	5.1E-119	2.43
	ϵ''	654.89**	2.27E-96	2.43
Short	ϵ'	1297.13**	1.5E-118	2.43
	ϵ''	1577.42**	1.3E-122	2.43

155 NB; ** means highly significant at 5% level

156 Variation of ϵ' with frequency and moisture content was not linear as shown in Table 2. High
 157 values of R^2 obtained justifies the good fit of non-linear relationship while the equations can
 158 be used to estimate ϵ' of the fruits at any given moisture content.

159 **Table 2:** Regression equations of relationship between dielectric properties of *Rubus*
 160 *Fruticosus* fruits and moisture content

Size	Dielectric properties	Regression equation	R^2
Long	ϵ'	$2.34 h^2 - 8.61 h + 8.58$	0.96
	ϵ''	$0.97 h^2 - 3.45 h + 2.68$	0.99
Short	ϵ'	$1.31 \ln(h) + 5.95$	0.99
	ϵ''	$2.37 h^{1.0549}$	0.99


161 h = moisture content.

162

163

164 3.1.2 Effect of temperature and frequency on ϵ' and ϵ'' of the fruits

165 The variation of dielectric constant (ϵ') and dielectric loss factor (ϵ'') with temperature plotted
 166 at frequency range of 200MHz to 20GHz is presented in Figs. 3 and 4

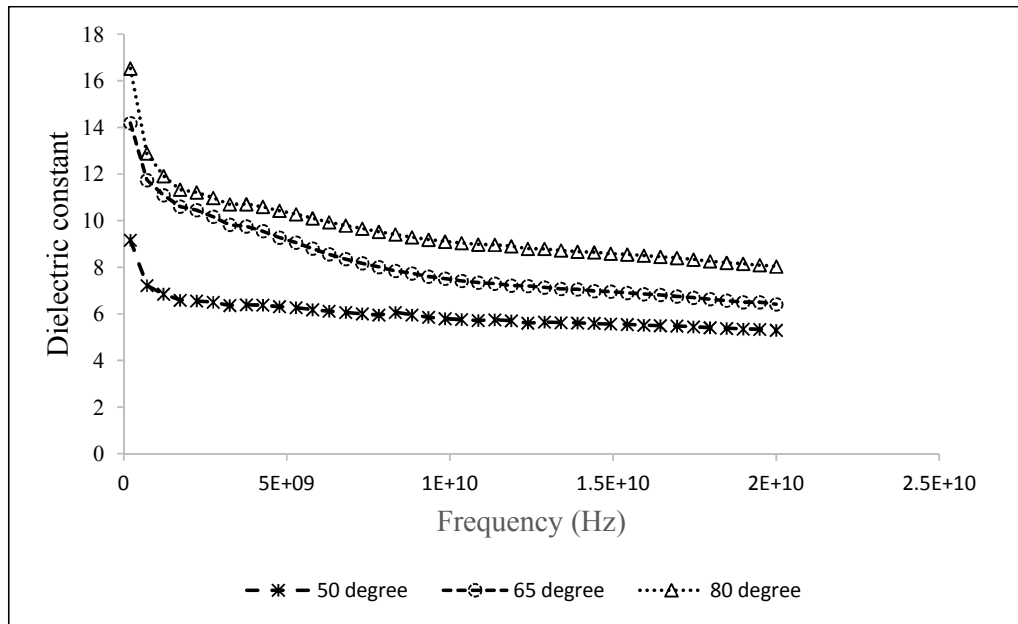


167

168

Fig 3a

169

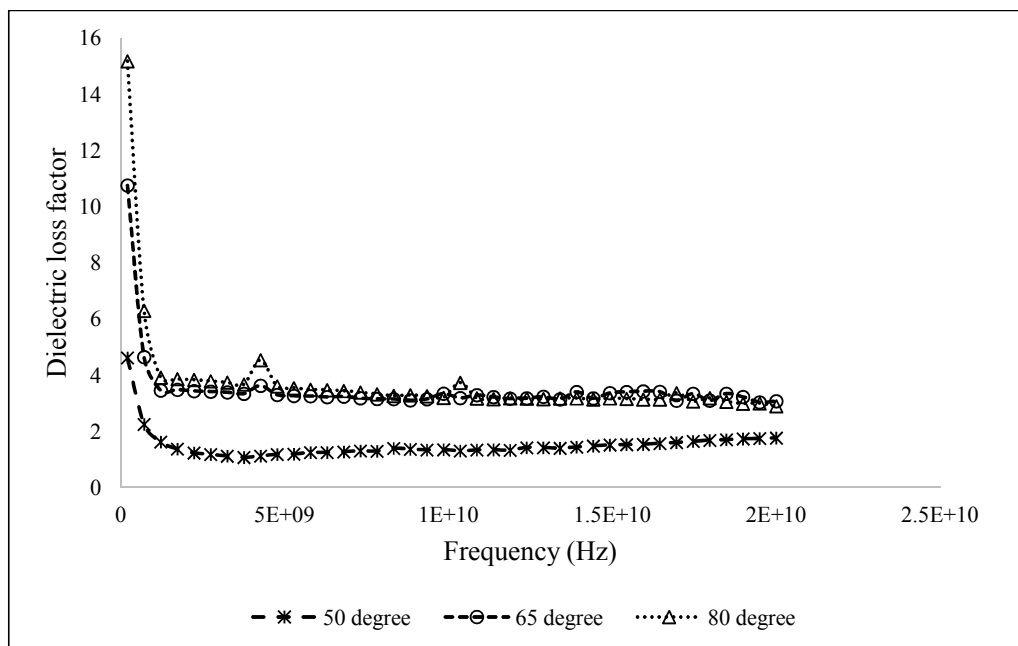

170

171


Fig 3b

172

173

174 **Figure 3:** The dependence of *Rubus Fruticosus Long* fruits (a) dielectric constant and (b)
 175 dielectric loss factor) on temperature

176

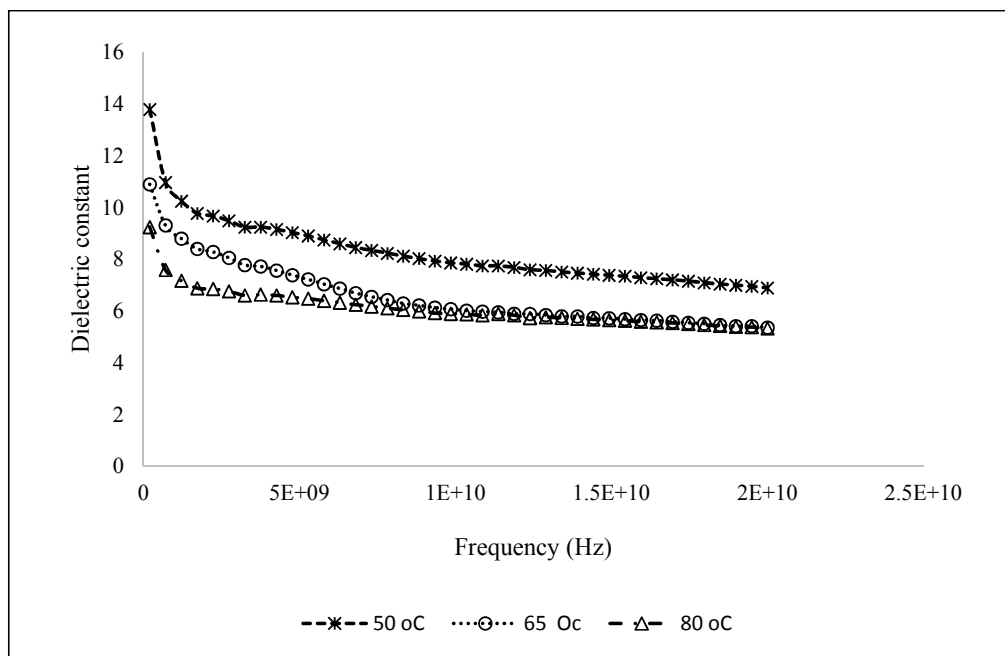


177

178

179

Fig. 4a

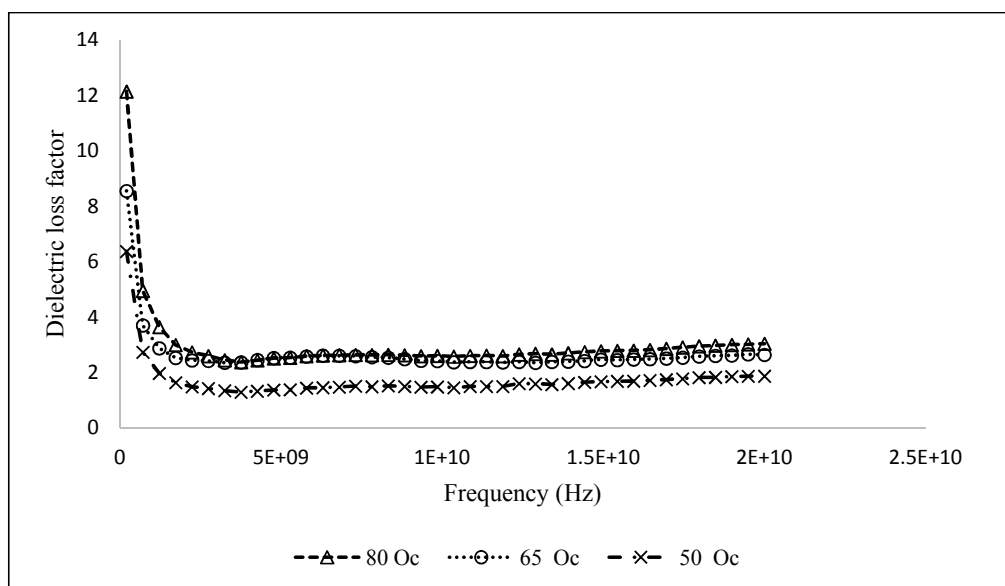

180

181

Fig. 4b

182 **Figure 4:** The dependence of *Rubus Fruticosus* short fruits (a) dielectric constant and (b)
 183 dielectric loss factor) on temperature.

184 It was observed that the values of ϵ' and ϵ'' are significantly (5%) low for all temperatures
 185 studied. Dielectric constant (ϵ') of long fruit decreased with increase in frequency (9.16 –
 186 5.29, 14.18 – 6.41 and 16.53 – 8.02 at 50 °C, 65 °C and 80 °C, respectively for 200MHz –
 187 20GHz). Short fruit (ϵ') also decreased with increase in frequency (13.79 – 6.88, 10.88 – 5.36
 188 and 9.23 – 5.35 at 50 °C, 65 °C and 80 °C respectively for 200MHz – 20GHz).

189 Both fruits at all temperatures experienced a sharp decrease in dielectric constant (ϵ') up to
 190 2.23GHz afterwards, reduction becomes gradual. At lower temperature (50 °C), changes in ϵ'
 191 of both fruits over frequency range considered are insignificant while significant (5%)
 192 changes were observed above 50 °C. Besides, dielectric loss factor (ϵ'') also had a very sharp
 193 decrease up to 1.21GHz and then increased as frequency increased in all the temperatures of
 194 both fruit sizes.

195 Loss factor (ϵ'') decreased from 5.05 – 4.61, 10.75 – 3.07 and 15.17 – 2.89 at 50 °C, 65 °C
 196 and 80 °C, respectively and increased with increase in temperature for long fruit and also
 197 decreased from 12.14 – 3.04, 8.55 – 2.64 and 6.37 – 1.87 at 50 °C, 65 °C and 80 °C
 198 respectively for short fruits. Low changes in ϵ' and ϵ'' at low temperature could be because
 199 the dipole molecules are weak at low temperature causing slow movement of the molecules
 200 and ionic conductivity of the product. Similar observation was reported of apple, wheat, fresh
 201 fruits and vegetables (Feng *et al.*, 2002 and Nelson, 2003). The temperature dependence of ϵ'
 202 and ϵ'' are highly significant (5%) for both fruits (Table 3).

203 **Table 3: NOVA** of dielectric properties of *Rubus Fruticosus* fruits as a function of
 204 temperature.

Size	Dielectric property	F- value	P- value	F - critical
Long	ϵ'	372.78**	1.2E-40	3.11
	ϵ''	109.85**	2.06E-23	3.11
Short	ϵ'	424.69**	1.17E-42	3.11
	ϵ''	112.29**	1.09E-23	3.11

205 Level of probability = 5%

206 The relationship between ϵ' and ϵ'' with temperature could be established using regression
 207 functions and equations as shown in Table 4

208 **Table 4:** Regression equations of relationship between dielectric properties of *Rubus*
 209 *Fruticosus* fruits and temperature.


Size	Dielectric properties	Regression equation	R ²
Long	ϵ'	$3.29\ln(T) + 5.96$	0.99
	ϵ''	$2.24 + 0.8205T - 0.3473T^2$	1
Short	ϵ'	$45.12e^{0.1506T}$	0.92
	ϵ''	$2.76 + 0.5673T - 0.303T^2$	1

210 **T** = temperature

211

212 **3.1.2.1 Dissipation factor of *Rubus Fruticosus* fruits**

213 Dissipation factor changed significantly (5%) as moisture level of the samples increased (Fig.
214 5).

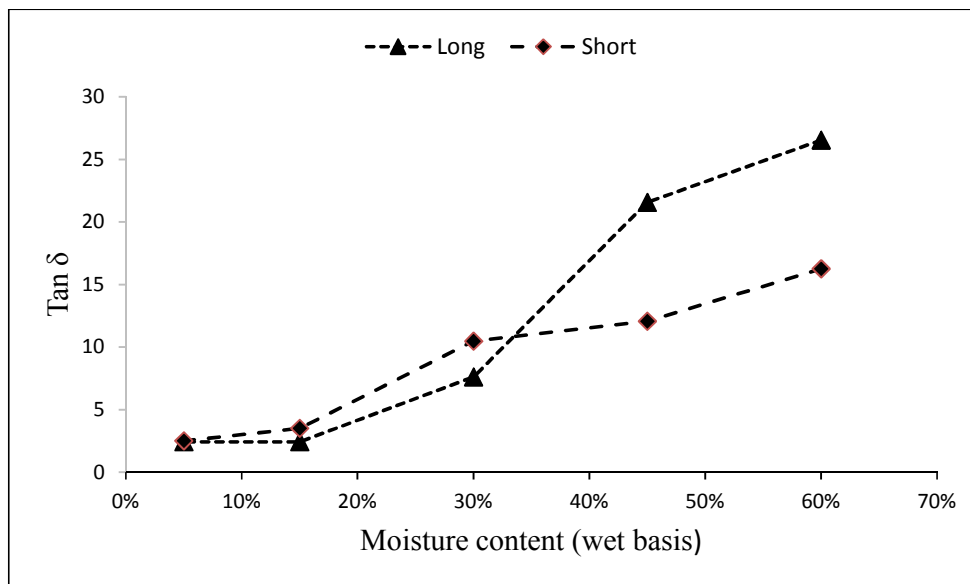


215

216 **Figure 5:** The plot of **dissipation factor** of *Rubus Fruticosus* fruits against moisture content.

217 Long and short fruit dissipation factors increased from 3.52 – 26.55 and 3.52 – 16.27
218 respectively as moisture content increased from 5.00% – 60.00% wet basis and, 13.96 –
219 23.19 and 15.53 – 22.06 respectively as temperature increases from 50 °C – 80 °C.

220 The relationship of dissipation factor with temperature as shown in Fig 6 was positive. At
221 lower moisture content (5.00%), the dissipation factor of both fruits are relatively the same
222 but from 30% wet basis and above, clear differences were observed. The behaviour of
223 dissipation factor for both fruits was the same at all temperatures studied. The increase in
224 dissipation factor with increase in temperature and moisture content confirms dielectric
225 constant (ϵ') and dielectric loss (ϵ'') dependence on the mobility of water molecules and ionic
226 conductivity of the given sample.

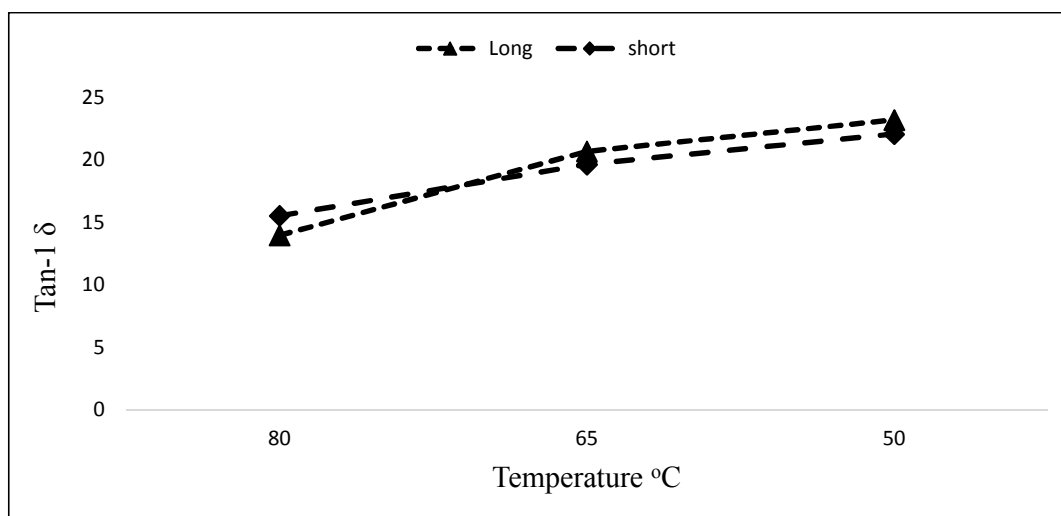

227

228 **Figure 6:** The plot of dissipation factor of *Rubus Fruticosus* fruits against Temperature

229 This result also showed that the ability of *Rubus Fruticosus* fruits to convert electromagnetic
 230 energy to heat energy is enhanced at higher temperature and moisture content. Regression
 231 equation showing the relationship between dissipation factor, temperature and moisture
 232 content is presented in Table 3.5, with high values of coefficient of determination (R^2) which
 233 indicates good fit.

234 3.1.3 Depth of penetration of electromagnetic wave

235 The depth of penetration of electromagnetic waves in *Rubus Fruticosus* fruits decreased
 236 with increase in moisture content and frequency (Table 5 and, Fig 7a and b) for both fruits.
 237 Penetration depth had no regular behaviour with moisture content until the fruits attained
 238 30% moisture level, further reduction in moisture content resulted in sharp increase in depth
 239 of penetration. This is as a result of sharp increase in dielectric constant at lower moisture
 240 content. At all level of moisture content studied, depth of penetration of both fruits were
 241 higher than microwave penetration in free space and deionized water at 915MHz and
 242 2450MHz except that of 30% moisture content. This means that higher
 243 moisture content would not negatively affect electromagnetic wave penetration in *Rubus*
 244 *Fruticosus* fruits. Similar trend was reported of legume flour by Guo *et al.* (2010) while Feng
 245 *et al.* (2002) reported negative influence of higher moisture content on electromagnetic wave
 246 penetration depth of fresh Red Delicious apples.

247 Increase in temperature from 50 °C - 80 °C resulted in corresponding increase in depth of
 248 penetration as shown in Fig 8a and b. This is because the ionic conductivity and mobility
 249 process is enhanced by higher temperature. This finding negates the report of Tripathi *et al.*
 250 (2015) for palm shell. These results, suggests that penetration depth of microwave will not
 251 impose any challenge during microwave heating and drying of *Rubus Fruticosus* fruits
 252 especially at higher temperature.

253 **Table 5:** Regression equations of relationship between dissipation factor
 254 *Rubus Fruticosus*,
 255 **moisture content and temperature**

Size	Dielectric properties	Moisture content		Temperature	
		Regression equation	R ²	Regression equation	R ²
Long	Tan δ	$3.49 h^2 - 11.17 h + 10.32$	0.97	$3.02 + 13.05T - 2.11T^2$	1
Short	Tan δ	$0.2157 h^2 + 2.11 h + 0.469$	0.94	$15.58T^{0.3216}$	0.99

256 **T** = temperature ; **h** = moisture content.

257

258

259 **Table 6:** Depth of electromagnetic wave penetration at constant moisture content
 260 **and temperature**


Size	5%		30%		60%		λ_o		λ_{water}	
	915 MHz	2450 MHz	915 MHz	2450 MHz	915 MHz	2450 MHz	915 MHz	2450 MHz	915 MHz	2450 MHz
Long	0.748 1	0.314 6	0.202 8	0.097 2	0.040 5	0.017 9	0.327 7	0.122 4	0.122 5	0.016 8
Short	1.27	1.67	0.992 4	0.916 2	0.153 1	0.160 5				

261 *NB. All the values are in m; (λ_o = penetration depth of microwaves in free space; λ_{water}*
 262 *= penetration depth of microwaves in*

263 *deionized water. Tang et al., 2002 and Feng et al., 2002). All values are in meters.*

264

265

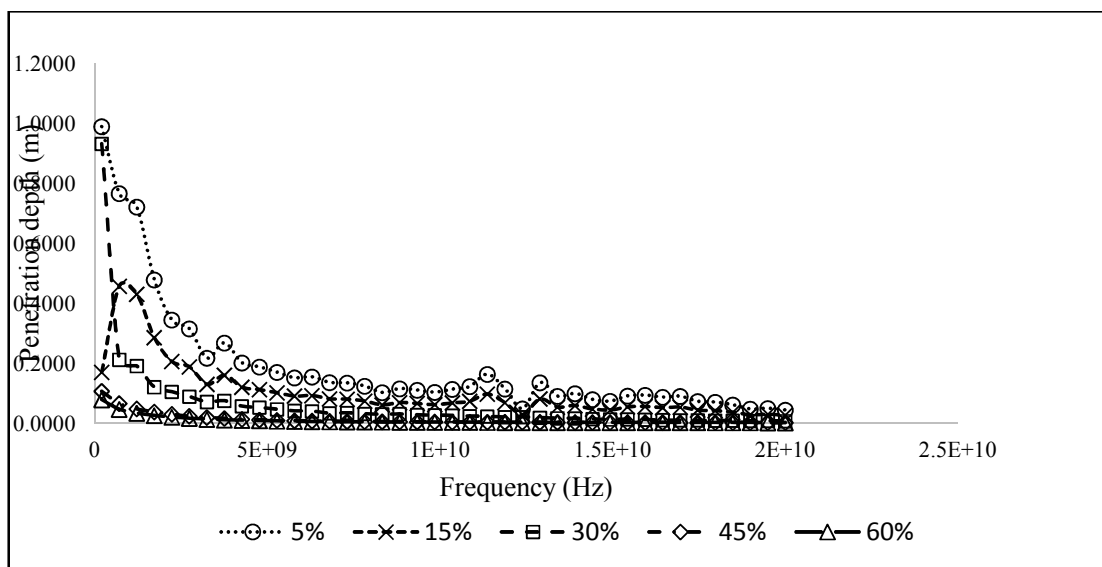


266

267

Fig. 7a

268

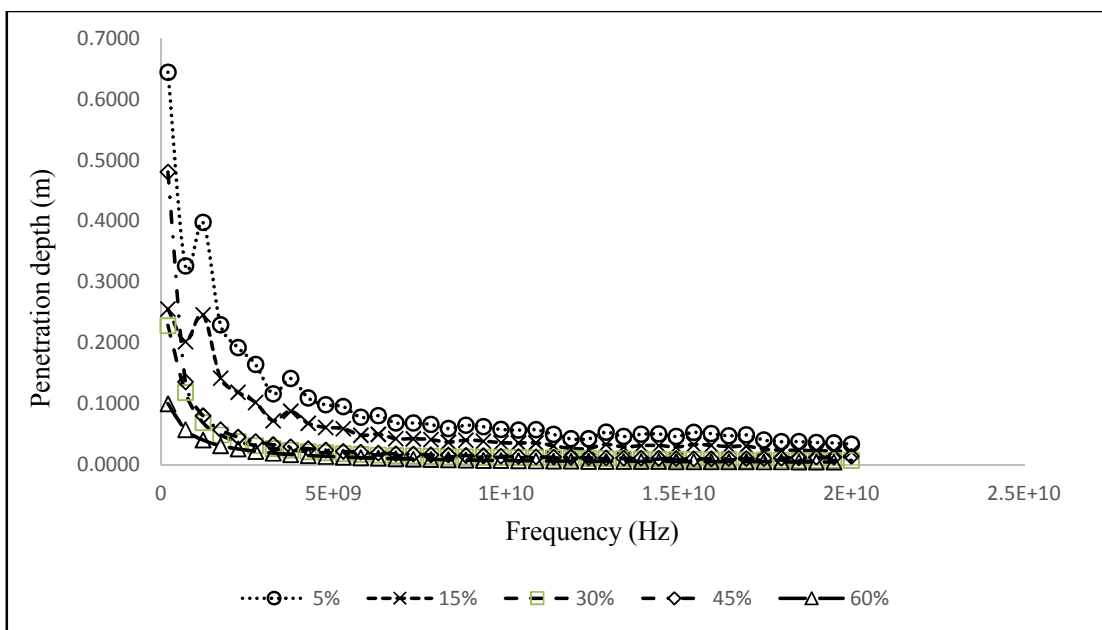


269

270

Fig. 7b

271 Figure 7: The plot of penetration depth of electromagnetic wave of *Rubus Fruticosus* (a)
 272 Long and (b) short fruits against frequency as affected by moisture content

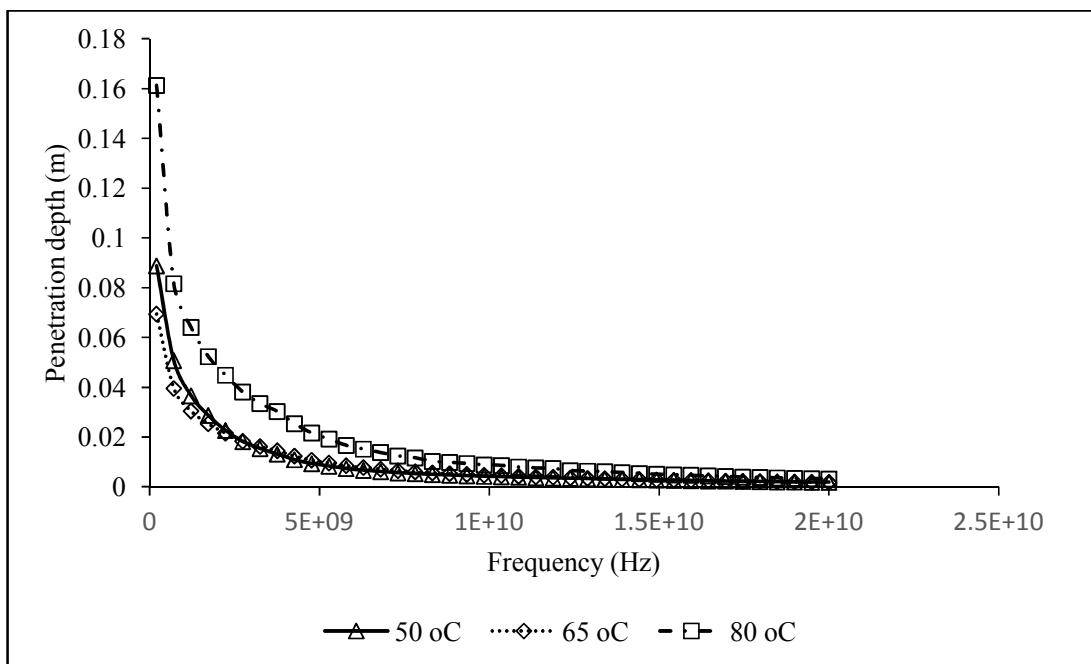


273

274

275

Fig. 8a

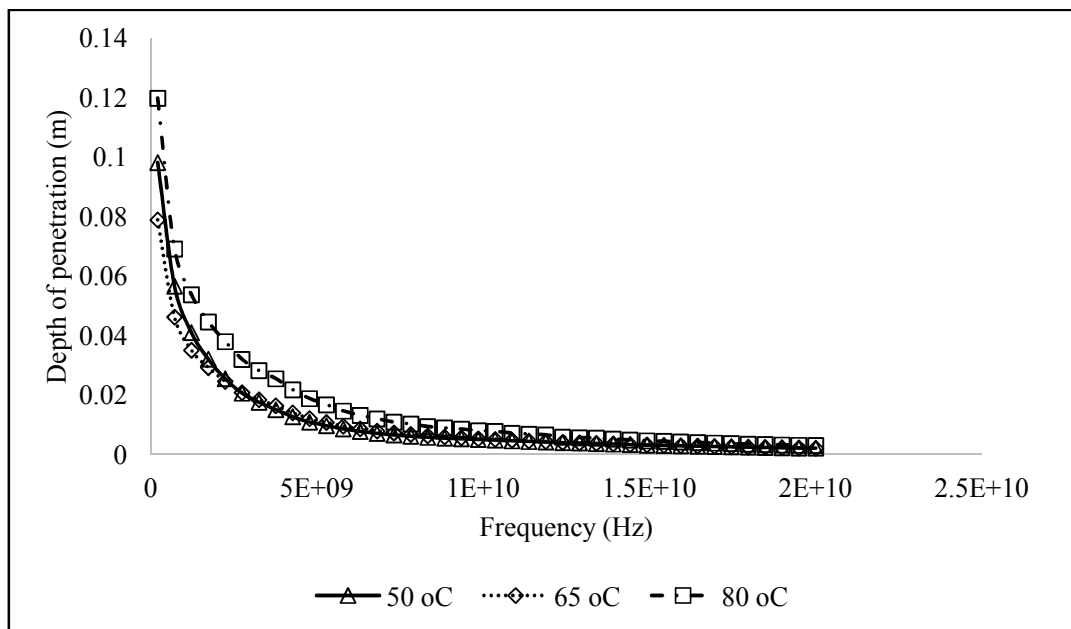

276

277

Fig. 8b

278 Figure 8: The plot of penetration depth of electromagnetic wave of *Rubus Fruticosus* (a)
 279 long and (b) short fruits against frequency as affected by temperature.

280 The relationship between the depth of electromagnetic wave penetration depth, frequency,
281 moisture content and temperature is given as regression equation in Table 7.

282 **Table 7: Relationship between depth of penetration, moisture content and temperature**

Variety	Regression Equations	R ²
Long	$DP = 0.0170 + 0.0009 T - 1.47e-11 f - 3.05e-15 Tf$	0.86
Short	$DP = 0.0036 + 0.0002 T - 7.46e-15 f - 1.33e-16 Tf$	0.87
Long	$DP = 0.5851 - 0.0070 h - 7.43e-11 f + 2.44e-12 hf$	0.91
Short	$DP = 0.1132 + 0.0264 h - 3.66e-11 f + 1.02e-12 hf$	0.83

283 **DP** = depth of penetration; **f** = frequency, **h** = moisture content; **T** = temperature

284 This means that higher moisture content does not reduce electromagnetic wave penetration in
285 *Rubus Fruticosus* fruits. Feng *et al.* (2002) reported negative influence of higher moisture
286 content on electromagnetic wave penetration depth of fresh Red Delicious apples. Similar
287 trend was also reported of legume flour by Guo *et al.* (2010).

288

289 4. CONCLUSIONS

290 Some engineering properties of *Rubus Fruticosus* fruits, **nut and nutshell** were studied and the
291 following conclusions were made: Temperature and moisture content highly affect both
292 dielectric constant and loss factor significantly (5%).

293

294 REFERENCES

- 295 Adamade, C.A. and Jackson, B.A. (2014). Agricultural mechanization: a strategy for
296 food sufficiency. *Journal of Agricultural Science* 4(3): 152-156.
- 297
- 298 Feng, H., Tang, J., & Cavalieri, R. (2002). Dielectric properties of dehydrated apples as
299 affected by moisture and temperature. *Transactions of the ASAE*, 45(1): 129–136.
- 300
- 301 Guo, W., Wang, S., Tiwari, G., Johnson, J.A., Tang, J. (2010). Temperature and
302 moisture dependent dielectric properties of legume flour associated with dielectric
303 heating. *LWT-Food Sci Technol* 43:193–201.
- 304
- 305 Hassan, H. E. (2002). Study of sorting and grading operations of Egyptian mature
306 oranges using visible laser. Ph.D. Th., Nat. Inst. of Laser In Enhanced Sc. (NILES),
307 Cairo U.: 12-15.
- 308
- 309 Ikediala, J. N., Tang, J. Drake, S. R. and Neven, L. G. (2000). Dielectric properties of
310 apple cultivars and codling moth larvae. *Trans. ASAE* 43(5): 1175–1184.
- 311

- 312 Irtwange, S. V. and Igbeka, J. C. (2004). Thermal conductivity of African yam bean
313 (*Sphenostlis Stenocarpa*) as affected by bulk density and moisture content. *Journal of*
314 *Applied Science, Engineering Technology*, 4(2): 1-6.
315
- 316 Kabukye, A., Herák, D. and Sedláček, A. (2011). Behaviour of different moisture
317 contents of *Jatropha curcas* L. seeds under compressive loading. *Res. Agri. Eng.*57(2):
318 72 – 77.
319
- 320 Konak, M., Carman, K. and Aydin, C. (2002). Physical properties of chick pea seeds.
321 *Biosystem Engineering*. 182(1): 73-78.
322
- 323 Kawamura S., M. Natsuga, K. Takekura, and K. Itoh (2003). Development of an
324 automatic rice-quality inspection system. *Ag. Process Eng. Lab, Grad. Sch. Ag. Sc.,*
325 *Hokkaido U., Sapporo 060-8589, Japan. Computers and Electronics in Agriculture* 40:
326 115- 126
327
- 328 Nelson S. O, Guo W, Trabelsi S, Kays S. (2007). Dielectric spectroscopy of
329 watermelons for quality sensing. *Measurements science Technology*; 18: 1887–1892.
330 15.
331
- 332 Ndirika, V.I.O. and Oyeleke, O.O. (2006). Determination of some selected physical
333 properties and their relationship with moisture content for millet (*Pennisetum*
334 *Glaucum L.*). *Applied Engineering in Agric.* ASABE, vol. 22(2):
335
- 336 Olawale, A. S. (2012). Solid-liquid extraction of oils of African elemi's (*Rubus Fruticosus*
337 *schweinfurthii*'s) fruit. *Agri Eng Int: CIGR Journal*, 14 (2): Manuscript No. 2083.
338
- 339 Oni, K, C. (2011). Man, machine and food insecurity. The ninety-fourth inaugural
340 lecture, University of Ilorin. Library and Publication Committee, University of Ilorin,
341 Nigeria. 1-70.
342
343
- 344 Orwa, C., A. Mutua, R. Kindt, R. Jamnadass, and A. Simons. (2009). Agroforestry
345 Database: a tree reference and selection guide version 4.0.
346 <http://www.worldagroforestry.org/af/treedb/>
347
- 348 Simonyan, K. J., Yiljep, Y. D., Oyatoyan, O. B. and Bawa, G. S. (2009). Effect of moisture on
349 some physical properties of *Lablab purpureus* (L.) sweet seeds. *Agricultural*
350 *Engineering International: the CIGR Ejournal Manuscript* 1279. Vol. XI.
351
- 352 Sirisomboon, P., Potncheloeampong, P. and Romphophek, T. (2007). Physical properties
353 of greensoya bean: Citrus fo sorting. *Journal of Food Engineering*, 79: 18-22.
354
- 355 Tripathi, M., Sahu, J.N., Ganesan, P., Monash, P. and Dey, T.K. (2015). Effect of
356 microwave frequency on dielectric properties of oil palmshell (OPS) and OPS char
357 synthesized by microwave pyrolysis of OPS. *Journal of Analytical and Applied*
358 *Pyrolysis*, 112: 306–312