

CHARACTERIZATION OF ENGINEERING PROPERTIES (ELECTRICAL PROPERTIES) OF RUBUS FRUTICOSUS

ABSTRACT

Some engineering properties of *RubusFruticosus* fruits were characterized in order to provide fundamental information about their properties that will aid in designing modern technology for their handling, processing, storage, preservation, quality evaluation, distribution and marketing. The engineering properties studied are electrical properties. The fruits were conditioned to five and three different moisture and three and four different temperature levels, respectively before testing. American Standards for Testing and Materials (ASTM) and American Society of Agricultural and Biological Engineering (ASABE) standard procedures were used to test all the properties considered. Genstat, Mathlab, JMP in SAS, Duncan in SPSS and Microsoft excel statistical packages were used to analyze the generated data and the means were compared using the analysis of variance (ANOVA) at 5% level of probability. Dielectric constant and loss factor of the fruits decreased with increase in frequency (200MHz – 20GHz) and increased with temperature. These information is recommended for design and development of efficient and effective technology for mechanizing *RubusFruticosus* products.

Keywords: Conductivity of dielectric, dielectric constant, loss factor, depth of microwave penetration.

1. INTRODUCTION

Since man started discovering and cultivating various types of food, there has never been food without work or work for abundant food without machines. The effectiveness of these machines for mechanizing agricultural production depends on adequate knowledge of engineering properties of the products to be mass produced. Mechanization involves replacing human and animal labour with mechanical devices in crop production, processing, storage and distribution. It reduces production cost, ensures timeliness, and optimizes and protects product quality (Adamade and Jackson, 2014)^[1]

In handling and processing of agricultural products, some fundamental information about their characteristics is essentially needed. These information can be obtained through the knowledge of engineering properties of the products which constitutes essential data in designing and developing modern technologies for their production, handling, processing, storage, preservation, quality evaluation, distribution and marketing.

Engineering properties of agricultural product are profitably used for mechanizing their planting, harvesting, drying, processing and storage. It improves working efficiency of processing equipment, reduces losses and waste of constructional materials and, saves time and money. It also helps to maintain quality even in adverse storage and handling conditions and offer ways in which products can be utilized effectively. In recent time, strong growing interest on tree crop for food, money and medicine has been ongoing. This is because there is high demand of food due to effects of development and increasing population, besides, many economic tree crops are fading away without being harnessed and replaced.

Tree crops are those perennial woody plants with a single elongated stem of about 3m high and above (Orwaet al., 2009)^[2] and, have head of branches and foliage on which fruits grow.

44 The fruits of tree crops are of great interest to food scientists, food producers and other
 45 scientists who work towards achieving food security. Modern agriculture has led to handling
 46 and processing of agricultural products into more useful product through various unit
 47 operations like cleaning, grading, sorting, drying, dehydration, storage, milling and
 48 transportation. *RubusFruticosus* fruit is an edible fruit from *RubusFruticosus* tree. It is eaten
 49 boiled or fresh for its nutritional and medicinal values.

50 Nigeria is blessed with a lot of economic tree crops that are rich in food and medicinal values.
 51 Development and high quest for foreign food have led to the abandonment of these crops as a
 52 result, they are gradually fading away, attracting effect of desertification to our environment.

53 The agro-industries are dying down due to over dependent on root, tubers, vegetables and
 54 grains for raw materials. These products have a lot of competition which increases their price;
 55 hence the industries find it difficult to cope due to little or no profit margin. *RubusFruticosus*
 56 fruits are protenious and contain edible oil which waste away in the farm annually and when
 57 harvested, a lot of losses are encountered due to low patronage. Processing of this important
 58 fruit is still by conventional method which encourages losses of both oil and kernel, is
 59 unhygienic and subjects the fruits to vagaries of heat treatment which results in poor quality
 60 oil. Olawale (2012)^[3] reported that the extraction of oils from elemi pulp and kernel are not
 61 being carried out at commercial level at present, despite ready availability of the fruit in large
 62 quantity in Nigeria and elsewhere in Sub-Sahara Africa. This situation would improve if data
 63 needed for the design and operation of the oils' extraction plants are
 64 available. *RubusFruticosus* nuts whichhouse the kernel are usuallythrown away after eaten the
 65 mesocarp, causing environmental pollution and loss of biomass resources for alternative
 66 energy generation. These are as a result of limited knowledge of engineering characteristics
 67 of this important fruit and nuts that will promote mechanization of its processing into other
 68 useful products.

69 Oni (2011)^[4] reported in his inaugural lecture that good number of machines and equipment
 70 targeted at agro-industries are substandard and break down frequently. This problem could be
 71 because of wrong choice of construction materials, which could be attributed to poor
 72 knowledge of engineering characteristics of the targeted agricultural product. Besides, the
 73 efficiency of most of the imported processing machines are too poor because they were
 74 produced and calibrated based on the engineering data of agricultural products obtained from
 75 the manufacturing countries causing maintenance challenges and abandonment of these
 76 machines.

77 Literature has revealed that several studies have been carried out on engineering properties of
 78 different agricultural products; chick pea seeds (Konak *et al.*, 2002),^[8] millet
 79 (*Pennisetumglaucum* L.) (Ndirika and Oyeleke, 2006),^[9] *Lablabpurpureus* (L) (Simonyanet
 80 *al.*, 2009),^[10] *Jatrophacurcas* L. fruit, nut and kernel (Sirisomboonet *al.*,
 81 (2007),^[11] *Jatrophacurcas* L. seed (Kabutey, *et al.*, 2011),^[12] African yam bean
 82 (*Sphenostylisstenocarpa*) (Irtwange and Igbeka, 2004),^[13] water melon (Nelson *et al.*,
 83 2007),^[14] orange (Hassan, 2002),^[15] rice (Kawamura *et al.*, 2003).^[16] Despite all these studies,
 84 there has not been any published work on engineering properties of *Rubusfruticosus* fruits. The
 85 objective of this study is to investigate the electrical properties of *Rubusfruticosus* fruits.

86 Electrical property involves heating the product due to its own electron losses when placed in
 87 an electrostatic field. Electrical properties are normally described in terms of dielectric
 88 property of the product which include dielectric constant (ϵ') and loss factor (ϵ'')

89 The dielectric constant of a material is associated with the energy storage capability in the
 90 electric field in the material and the loss factor (dissipation factor) has to do with the energy
 91 dissipation or absorption due to conversion of electric energy to heat energy in the
 92 material. The dielectric constant and loss factor are usually influenced by the volume of air
 93 void in sample, moisture content and temperature, frequency as well as chemical composition

94 of the product. In complex permittivity of most materials, dielectric constant (ϵ') and loss
 95 factor (ϵ'') are expressed as real and imaginary part of the permittivity (ϵ) as shown in Eq. 1

$$96 \quad \epsilon = \epsilon' - j\epsilon'' \dots\dots\dots (1)$$

97 The loss tangent is given as, Eq. 2:

$$98 \quad \tan \delta = \frac{\epsilon''}{\epsilon'} \dots\dots\dots (2)$$

99

100 2. MATERIALS AND METHODS

101 2.1 ELECTRICAL PROPERTIES OF THE FRUITS

102 Dielectric properties of *RubusFruticosus* fruits were experimented at frequency range of 50
 103 MHz – 40 GHz using dielectric analyzer (S – Parameter 8722ES). Transmission line
 104 techniques were used to determine the electrical properties of the product (Vijay et al.,
 105 2015). Samples of moisture content (5, 15, 30, 45, 60% (wb)) were conditioned to
 106 temperatures of 50 °C, 65 °C and 80 °C using water bath, the moisture content of the fruits
 107 were determined by oven drying method. Initial moisture content of the fruits were allowed to
 108 be uniform by placing in a refrigerator at 5 °C for about 18 hours. The moisture content of the
 109 fruits were determined at average environmental temperature and relative humidity of 38 °C
 110 and 77% respectively. The fruits samples were weighed using digital balance of 0.01g
 111 accuracy before putting them in the oven. The oven was set at 105 °C for 8 hours. The
 112 difference between the initial and final weight of each sample was used to calculate the
 113 moisture content of the sample as Eq. 3 (Mohsenin 1986).^[20]

$$114 \quad \% M_{wb} = \frac{W_1 - W_2}{W_1} \times \frac{100}{1} \quad 3$$

115 Where: M_{wb} = moisture content wet basis (%), W_1 = initial weight (g). W_2 = final weight
 116 These moisture and temperature levels were chosen considering samples under dried and
 117 softening conditions. The hot samples were quickly transferred to the probe of the calibrated
 118 system which measures and displays the fruits dielectric constant and loss factor
 119 automatically. Loss tangent and depth of penetration were calculated as shown in Eqs 4 and
 120 5, respectively.

$$121 \quad \tan \delta = \frac{\epsilon''}{\epsilon'} \dots\dots\dots (4)$$

$$122 \quad D_p = \frac{c}{2\pi f \sqrt{2\epsilon' \left[\sqrt{1 + \left(\frac{\epsilon''}{\epsilon'}\right)^2} - 1 \right]}} \dots\dots\dots (5)$$

123 Where: c = speed of light (3×10^8 m/s), D_p = depth of penetration (mm)

124 The experiment was replicated three times for each temperature and moisture content studied.


125 3. RESULTS AND DISCUSSION

126 3.1 ELECTRICAL PROPERTIES OF *RUBUS FRUTICOSUS* FRUITS

127 3.1.1 Effect of moisture content and frequency on ϵ' and ϵ'' of the fruits

128 Fig. 1 and 2 showed the dielectric properties of *RubusFruticosus* fruits as a function of
 129 frequency at five different moisture contents. The dielectric constant (ϵ') and loss factor (ϵ'')
 130 for both long and short fruits decreased with increase in frequency and increased as moisture
 131 content rises from 5.00% – 60.00% wet basis. The dielectric constant (ϵ') for short and long
 132 fruits increased from 2.06 – 6.79 and 1.12 – 33.68 respectively as moisture content increased


133 from 5.00% – 60.00% wet basis. Loss factor (ϵ'') for short and long fruits also increased from
 134 0.6594 – 5.99 and 1.22 – 14.99, respectively.

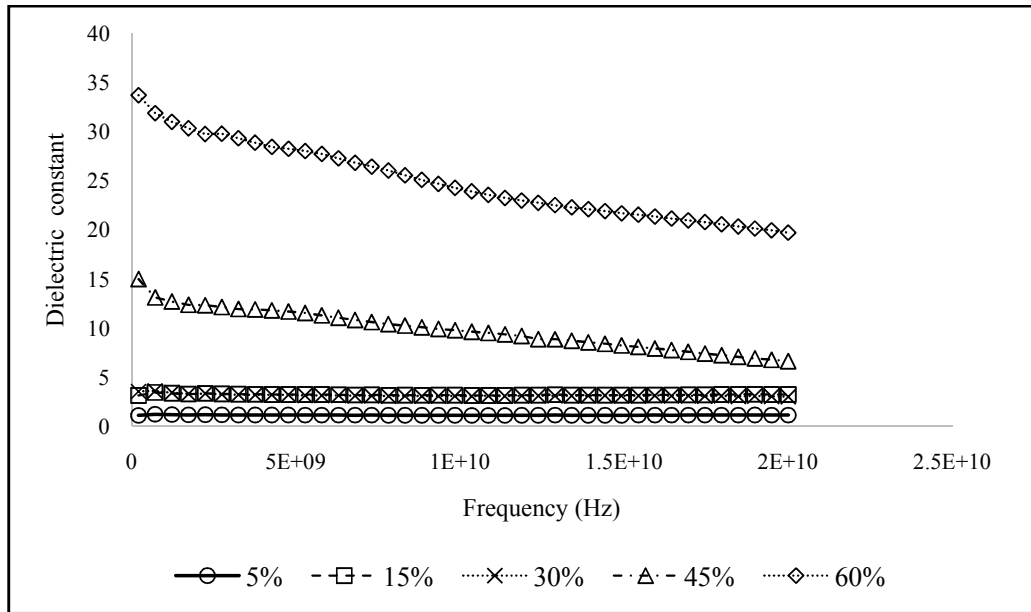

135

136

Fig. 1a.

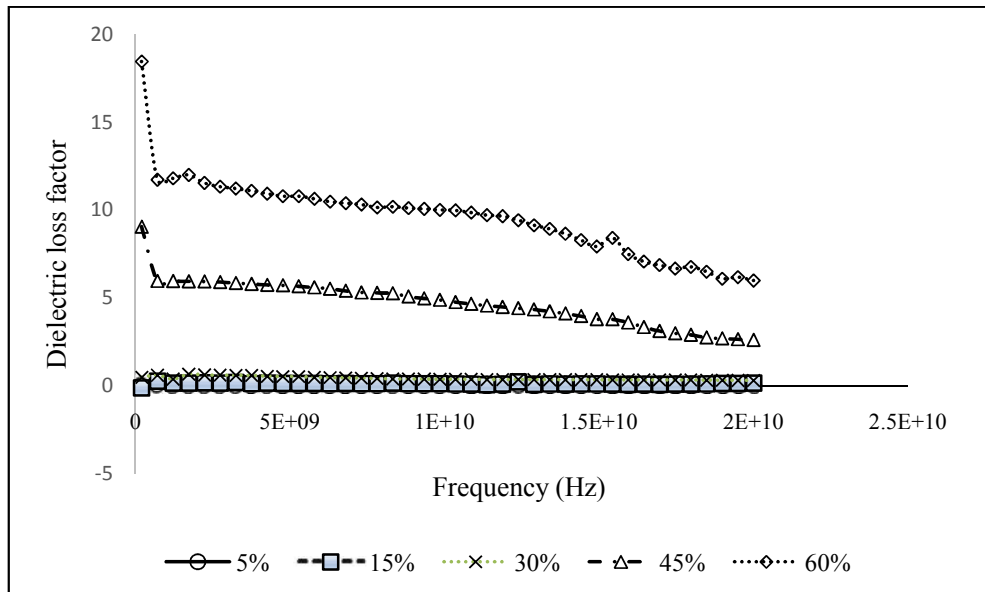


137

138

Fig. 1b.

139 “Fig. 1. The dependence of *Rubus fruticosus* long fruits (a) dielectric constant and (b)
 140 dielectric loss factor) on frequency at five various moisture content wet basis.”

141

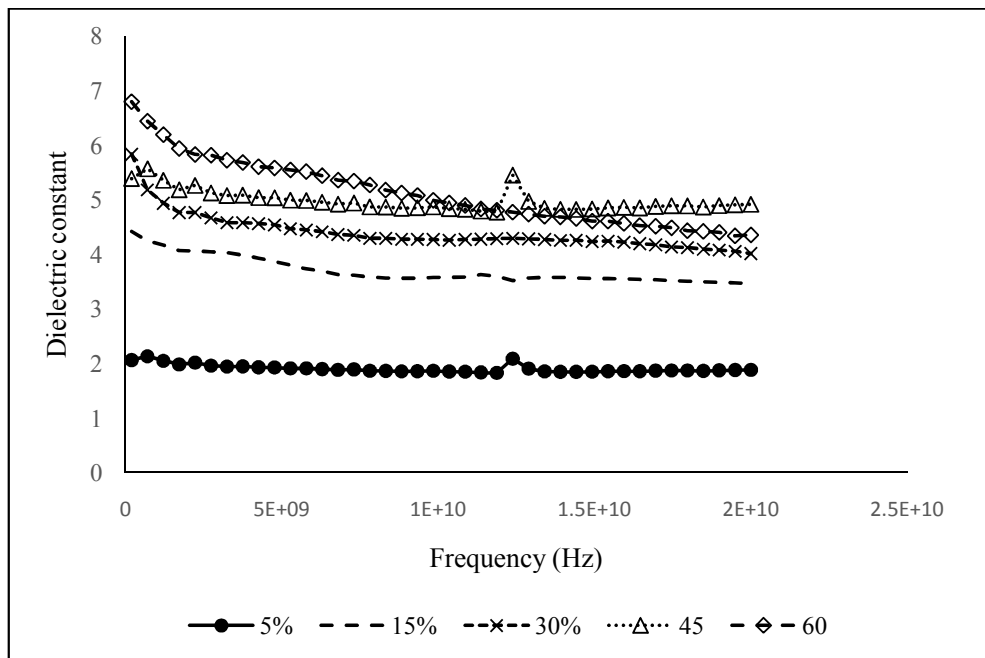


142

143

144

Fig. 2a.

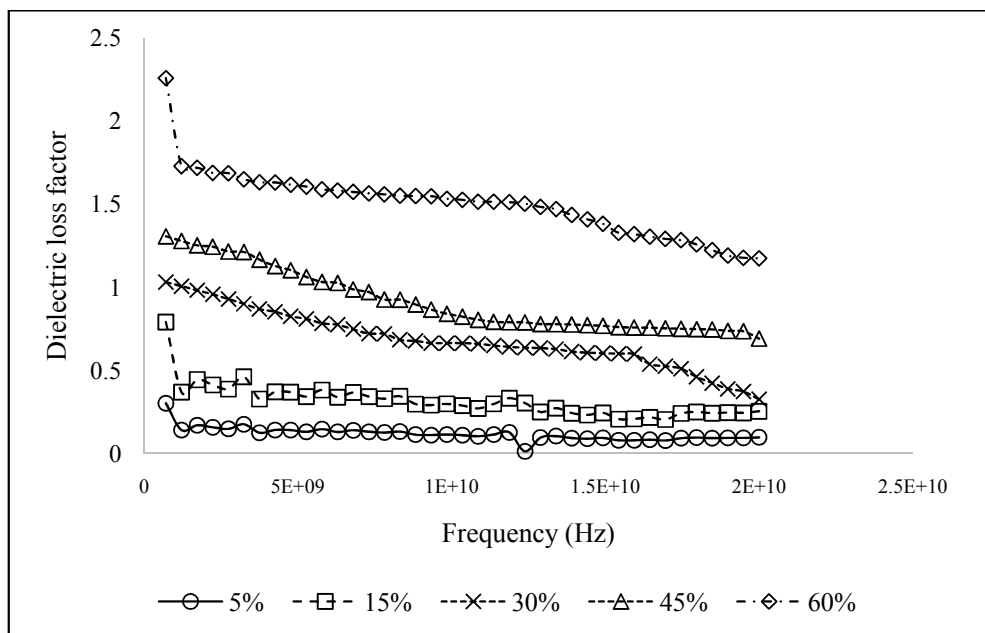

145

146

Fig. 2b.

147 “Fig. 2. The dependence of *Rubus fruticosus* long fruits (a) dielectric constant and (b)
 148 dielectric loss factor) on frequency at five various moisture content wet basis.”

149

150 At lower moisture content (5% wet basis), ϵ'' and ϵ' of both fruits are very low throughout the
 151 frequency range studied except ϵ' of short fruit. The reduction in ϵ' with moisture content and

152 frequency was reported to be due to low dispersion of water molecules caused by the effects
 153 of relaxation process and ionic conduction (Feng *et al.*, 2002).^[21] Long and short fruits had
 154 the lowest value of ϵ' at 10GHz and 11GHz under dry condition (5.00% wet
 155 basis). respectively while under wet condition (60.00% wet basis) both fruits attend the lowest
 156 values at 20GHz. Ikedia *et al.*(2000),^[22] and Feng *et al.*(2002)^[23] observed similar trend
 157 with apple fruits at lower moisture content.
 158 ANOVA at 5% level of significance summarized in Table1 also revealed that moisture
 159 content and frequency had high significant effect on ϵ' and ϵ'' .

160

161 **Table 1. ANOVA of dielectric properties of *RubusFruticosus* fruits as a function of**
 162 **moisture content (5, 15, 30, 45, 60% (wb))**

Size	Dielectric property	F- value	P- value	F - critical
Long	ϵ'	1315.51**	5.1E-119	2.43
	ϵ''	654.89**	2.27E-96	2.43
Short	ϵ'	1297.13**	1.5E-118	2.43
	ϵ''	1577.42**	1.3E-122	2.43

163 NB; ** means highly significant at 5% level

164 Variation of ϵ' with frequency and moisture content was not linear as shown in Table 2. High
 165 values of R² obtained justifies the good fit of non-linear relationship while the equations can
 166 be used to estimate ϵ' of the fruits at any given moisture content.

167 **Table 2. Regression equations of relationship between dielectric properties of**
 168 ***RubusFruticosus* fruits and moisture content**

Size	Dielectric properties	Regression equation	R ²
Long	ϵ'	$2.34h^2 - 8.61h + 8.58$	0.96
	ϵ''	$0.97h^2 - 3.45h + 2.68$	0.99
Short	ϵ'	$1.31 \ln(h) + 5.95$	0.99
	ϵ''	$2.37h^{1.0549}$	0.99


169 h = moisture content.

170

171

172 3.1.2 Effect of temperature and frequency on ϵ' and ϵ'' of the fruits

173 The variation of dielectric constant (ϵ') and dielectric loss factor (ϵ'') with temperature plotted
 174 at frequency range of 200MHz to 20GHz is presented in Figs. 3 and 4

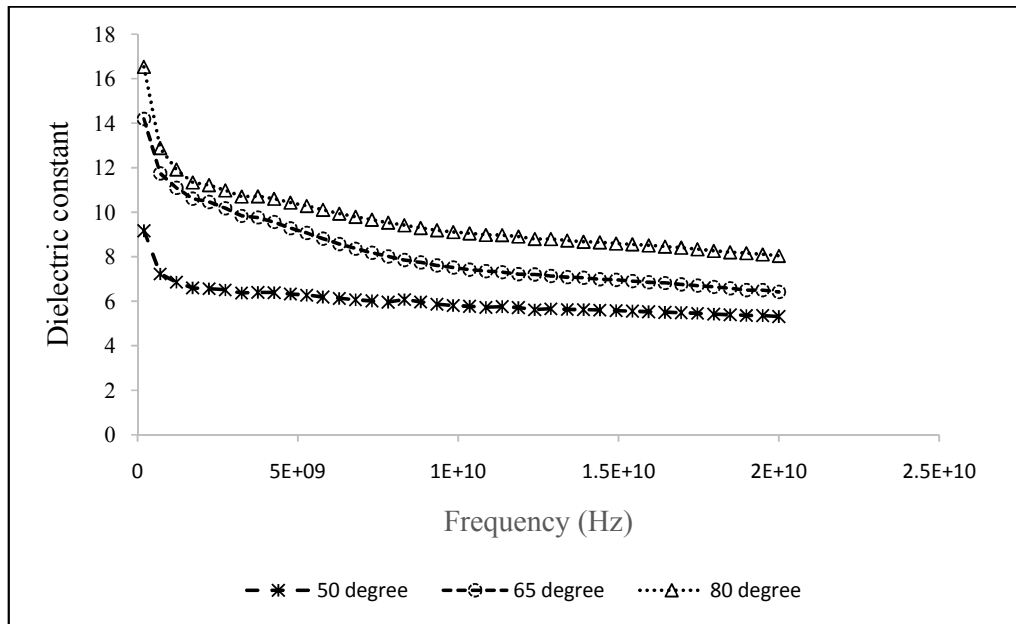


175

176

Fig. 3a.

177

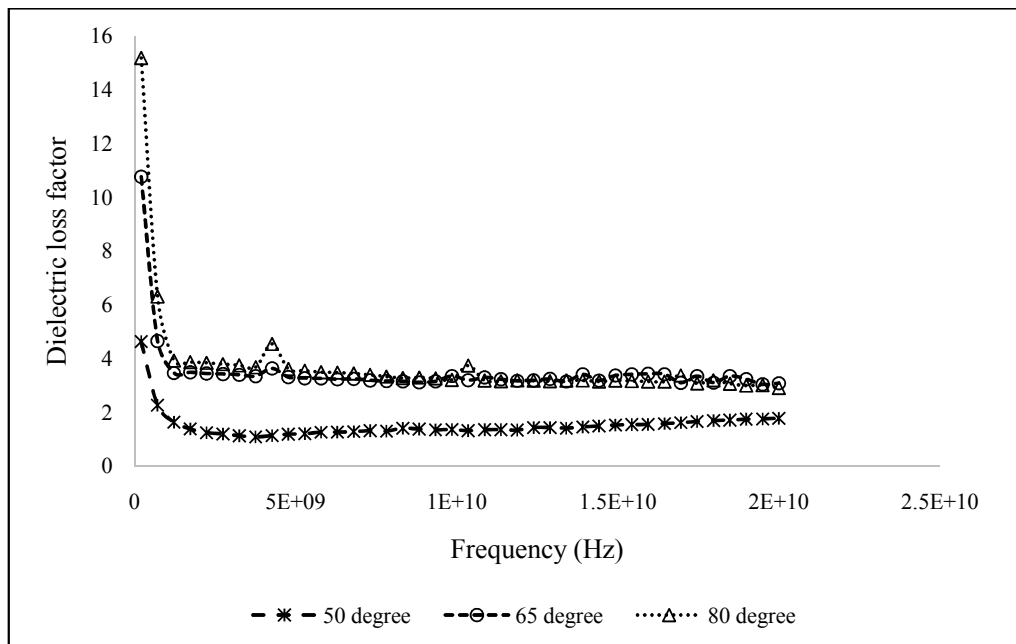

178

179


Fig. 3b.

180

181

182 **Fig. 3. The dependence of *RubusFruticosus* Long fruits (a) dielectric constant and (b)**
 183 **dielectric loss factor) on temperature**

184

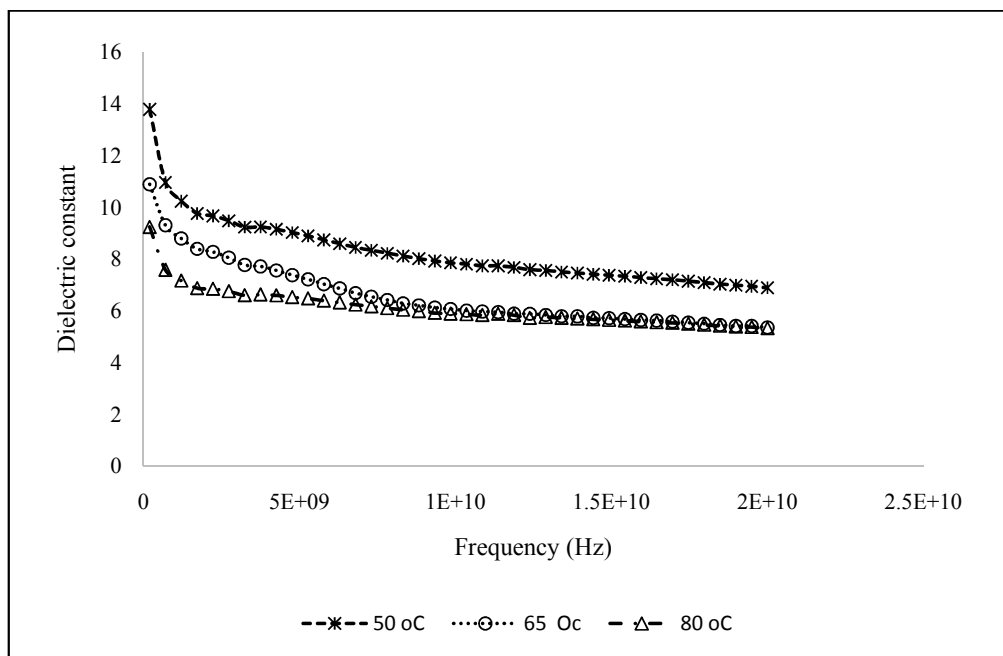


185

186

Fig. 4a.

187

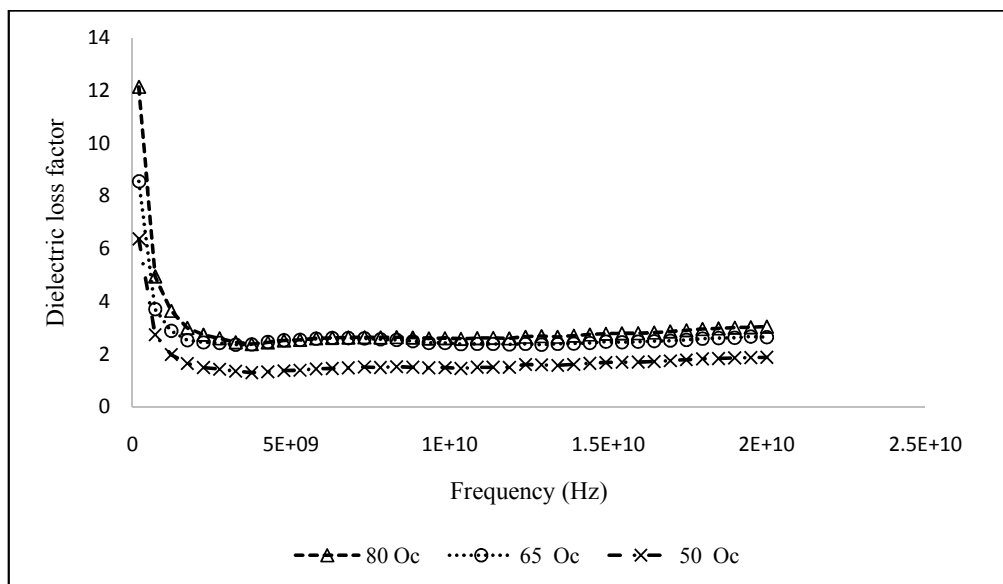

188

189

Fig. 4b.

190 **Fig. 4. The dependence of *Rubus fruticosus* short fruits (a) dielectric constant and (b)**
 191 **dielectric loss factor) on temperature.**

192 It was observed that the values of ϵ' and ϵ'' are significantly (5%) low for all temperatures
 193 studied. Dielectric constant (ϵ') of long fruit decreased with increase in frequency (9.16 –
 194 5.29, 14.18 – 6.41 and 16.53 – 8.02 at 50 °C, 65 °C and 80 °C, respectively for 200MHz –
 195 20GHz). Short fruit (ϵ'') also decreased with increase in frequency (13.79 – 6.88, 10.88 – 5.36
 196 and 9.23 – 5.35 at 50 °C, 65 °C and 80 °C respectively for 200MHz – 20GHz).

197 Both fruits at all temperatures experienced a sharp decrease in dielectric constant (ϵ') up to
 198 2.23GHz afterwards, reduction becomes gradual. At lower temperature (50 °C), changes in ϵ'
 199 of both fruits over frequency range considered are insignificant while significant (5%)
 200 changes were observed above 50 °C. Besides, dielectric loss factor (ϵ'') also had a very sharp
 201 decrease up to 1.21GHz and then increased as frequency increased in all the temperatures of
 202 both fruit sizes.

203 Loss factor (ϵ'') decreased from 5.05 – 4.61, 10.75 – 3.07 and 15.17 – 2.89 at 50 °C, 65 °C
 204 and 80 °C, respectively and increased with increase in temperature for long fruit and also
 205 decreased from 12.14 – 3.04, 8.55 – 2.64 and 6.37 – 1.87 at 50 °C, 65 °C and 80 °C
 206 respectively for short fruits. Low changes in ϵ' and ϵ'' at low temperature could be because
 207 the dipole molecules are weak at low temperature causing slow movement of the molecules
 208 and ionic conductivity of the product. Similar observation was reported of apple, wheat, fresh
 209 fruits and vegetables (Feng *et al.*, 2002).^[24] The temperature dependence of ϵ' and ϵ'' are
 210 highly significant (5%) for both fruits (Table 3).

211 **Table 3. NOVA of dielectric properties of *RubusFruticosus* fruits as a function of**
 212 **temperature.**

Size	Dielectric property	F- value	P- value	F - critical ²¹³
Long	ϵ'	372.78**	1.2E-40	3.11
	ϵ''	109.85**	2.06E-23	3.11
Short	ϵ'	424.69**	1.17E-42	3.11
	ϵ''	112.29**	1.09E-23	3.11

214 Level of probability = 5%

215 The relationship between ϵ' and ϵ'' with temperature could be established using regression
 216 functions and equations as shown in Table 4.

217 **Table 4. Regression equations of relationship between dielectric properties of**
 218 ***RubusFruticosus* fruits and temperature.**


Size	Dielectric properties	Regression equation	R ²
Long	ϵ'	$3.29\ln(T) + 5.96$	0.99
	ϵ''	$2.24 + 0.8205T - 0.3473T^2$	1
Short	ϵ'	$45.12e^{0.1506T}$	0.92
	ϵ''	$2.76 + 0.5673T - 0.303T^2$	1

219 **T** = temperature

220

221 **3.1.2.1 Dissipation factor of *RubusFruticosus* fruits**

222 **Dissipation factor** changed significantly (5%) as moisture level of the samples increased (Fig.
223 5).

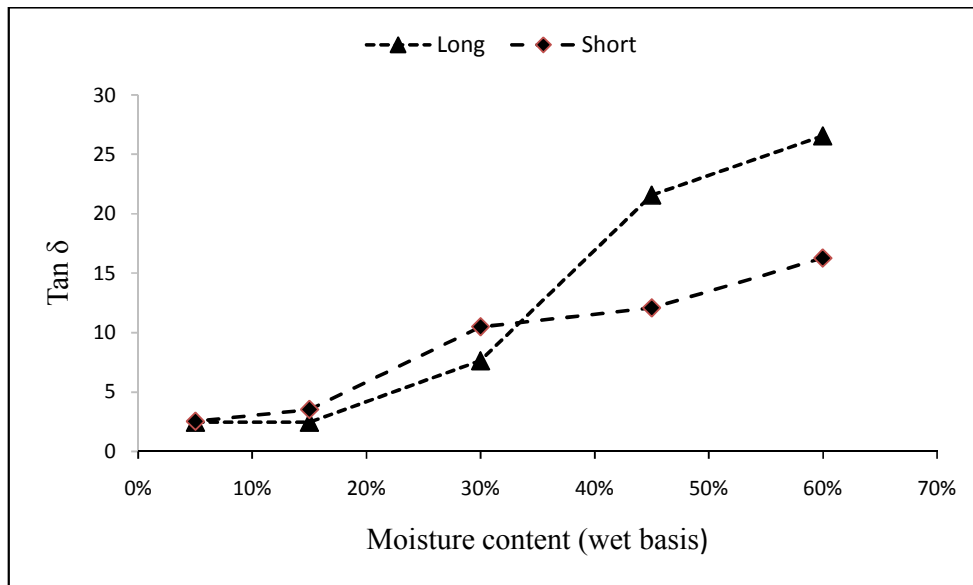


224

225 **Fig.5. The plot of dissipation factor of *RubusFruticosus* fruits against moisture content.**

226 Long and short fruit dissipation factors increased from 3.52 – 26.55 and 3.52 – 16.27
227 respectively as moisture content increased from 5.00% – 60.00% wet basis and, 13.96 –
228 23.19 and 15.53 – 22.06 respectively as temperature increases from 50 °C – 80 °C.

229 The relationship of dissipation factor with temperature as shown in Fig.6 was positive. At
230 lower moisture content (5.00%), the dissipation factor of both fruits are relatively the same
231 but from 30% wet basis and above, clear differences were observed. The behaviour of
232 dissipation factor for both fruits was the same at all temperatures studied. The increase in
233 dissipation factor with increase in temperature and moisture content confirms dielectric
234 constant (ϵ') and dielectric loss (ϵ'') dependence on the mobility of water molecules and ionic
235 conductivity of the given sample.

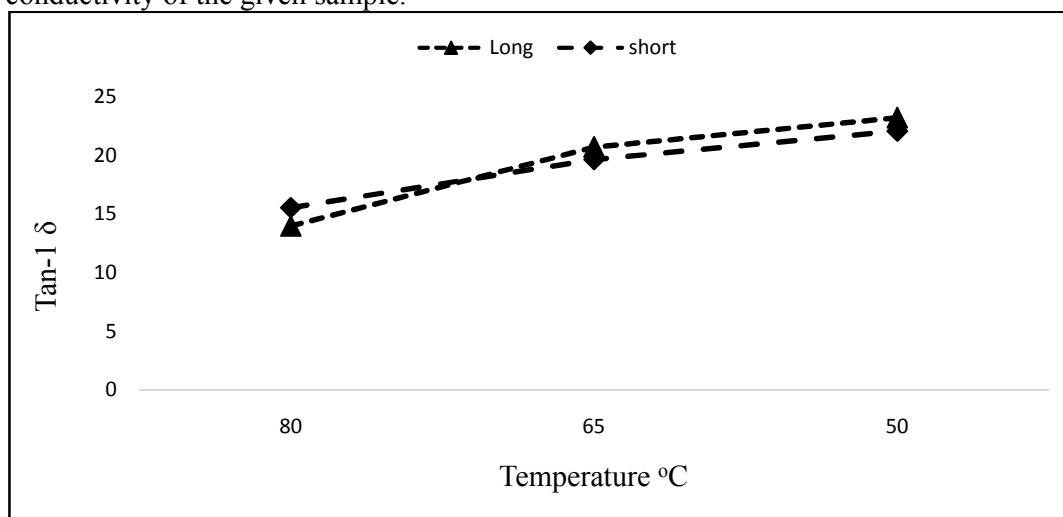

236

237 **Fig. 6. The plot of dissipation factor of *RubusFruticosus* fruits against Temperature**

238 This result also showed that the ability of *RubusFruticosus* fruits to convert electromagnetic
239 energy to heat energy is enhanced at higher temperature and moisture content. Regression
240 equation showing the relationship between dissipation factor, temperature and moisture
241 content is presented in Table 3.5, with high values of coefficient of determination (R^2) which
242 indicates good fit.

243 **3.1.3 Depth of penetration of electromagnetic wave**

244 The depth of penetration of electromagnetic waves in *RubusFruticosus* fruits decreased with
245 increase in moisture content and frequency (Table 5. and, Fig. 7a and b) for both fruits.
246 Penetration depth had no regular behaviour with moisture content until the fruits attained
247 30% moisture level, further reduction in moisture content resulted in sharp increase in depth
248 of penetration. This is as a result of sharp increase in dielectric constant at lower moisture
249 content. At all level of moisture content studied, depth of penetration of both fruits were
250 higher than microwave penetration in free space and deionized water at 915MHz and
251 2450MHz except that of 30% moisture content. This means that higher
252 moisture content would not negatively affect electromagnetic wave penetration in
253 *RubusFruticosus* fruits. Similar trend was reported of legume flour by Guo *et al.* (2010)^[26]
254 while Feng *et al.* (2002)^[27] reported negative influence of higher moisture content on
255 electromagnetic wave penetration depth of fresh Red Delicious apples.
256 Increase in temperature from 50 °C - 80 °C resulted in corresponding increase in depth of
257 penetration as shown in Fig. 8a and b. This is because the ionic conductivity and mobility
258 process is enhanced by higher temperature. This finding negates the report of Tripathi *et al.*
259 (2015)^[28] for palm shell. These results, suggests that penetration depth of microwave will not
260 impose any challenge during microwave heating and drying of *RubusFruticosus* fruits
261 especially at higher temperature.

262
263**Table 5. Regression equations of relationship between dissipation factor *Rubus Fruticosus*, moisture content and temperature**

Size	Dielectric properties	Moisture content		Temperature	
		Regression equation	R ²	Regression equation	R ²
Long	Tan δ	$3.49 h^2 - 11.17 h + 10.32$	0.97	$3.02 + 13.05T - 2.11T^2$	1
Short	Tan δ	$0.2157 h^2 + 2.11 h + 0.469$	0.94	$15.58T^{0.3216}$	0.99


264
265
266**T** = temperature ; **h** = moisture content.267
268**Table 6. Depth of electromagnetic wave penetration at constant moisture content and temperature**

Size	5%		30%		60%		λ_o		λ_{water}	
	915 MHz	2450 MHz	915 MHz	2450 MHz	915 MHz	2450 MHz	915 MHz	2450 MHz	915 MHz	2450 MHz
Long	0.748	0.314	0.202	0.097	0.040	0.017	0.327	0.122	0.122	0.016
	1	6	8	2	5	9	7	4	5	8
Short	1.27	1.67	0.992	0.916	0.153	0.160				
			4	2	1	5				

269
270
271

*NB. All the values are in m; (λ_o = penetration depth of microwaves in free space; λ_{water} = penetration depth of microwaves in deionized water (Feng *et al.*, 2002).^[30]*

272

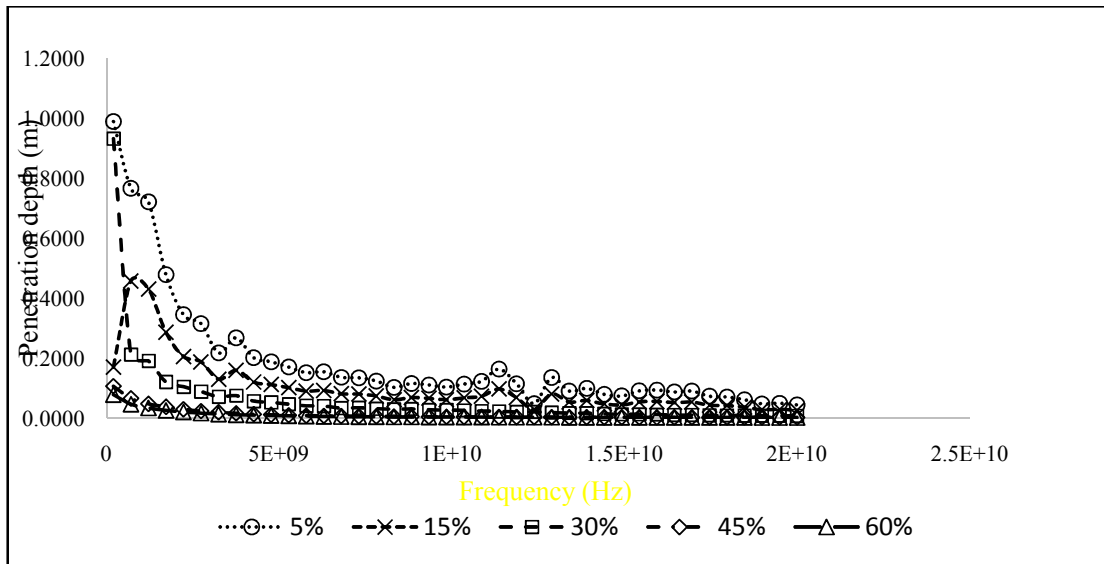


273

274

Fig. 7a.

275

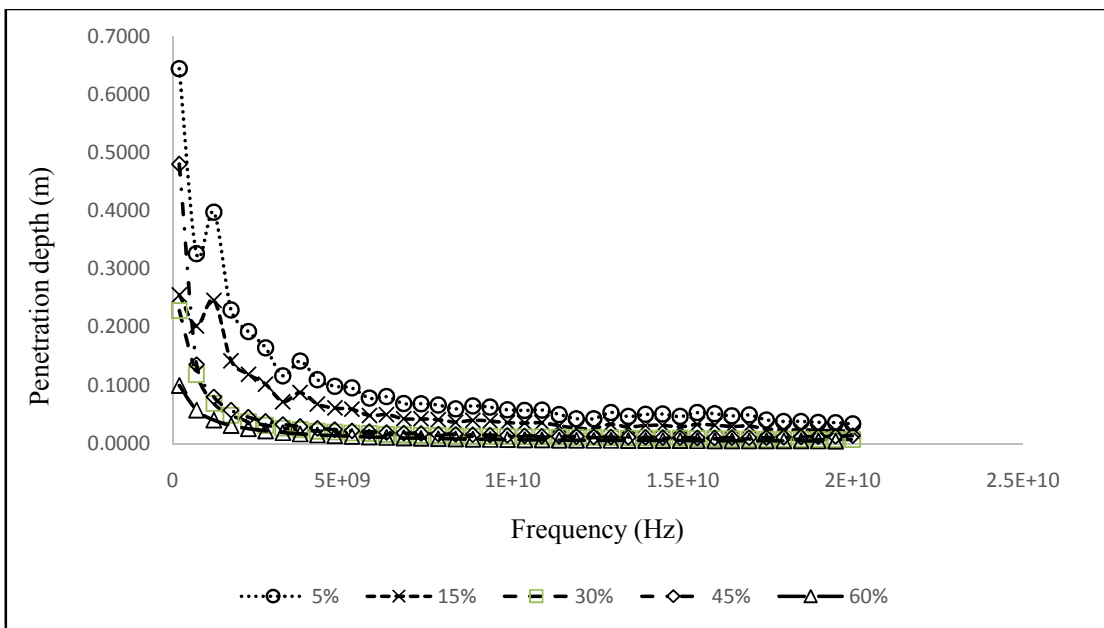


276

277

Fig. 7b.

278 **Fig. 7.** The plot of penetration depth of electromagnetic wave of *Rubus fruticosus* (a)
 279 **Long** and (b) short fruits against frequency as affected by moisture content

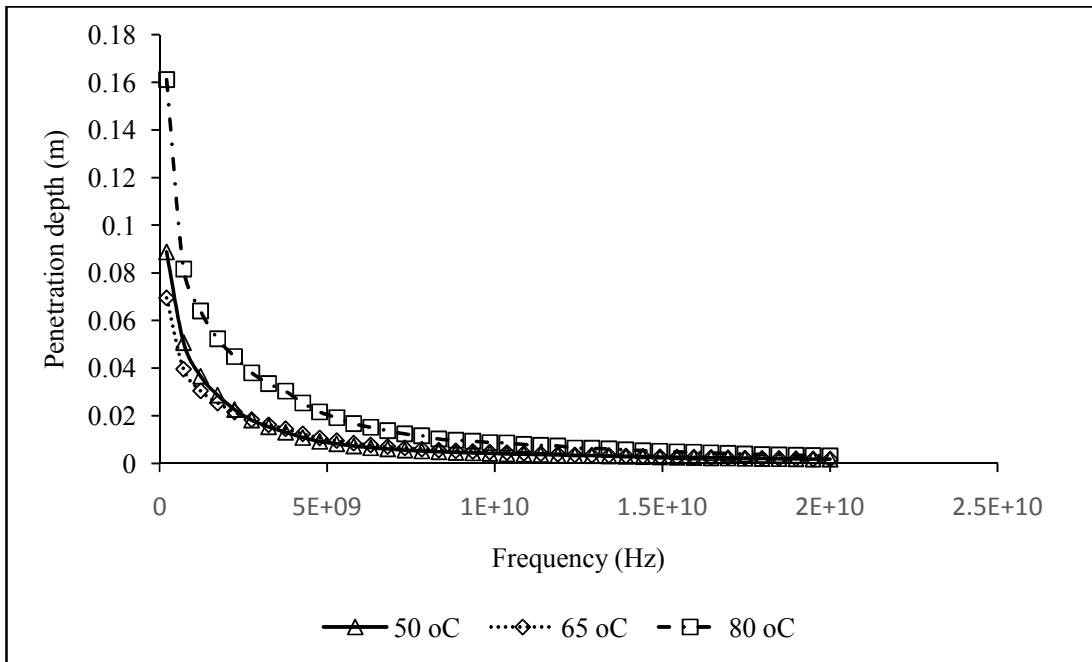


280

281

282

Fig. 8a.

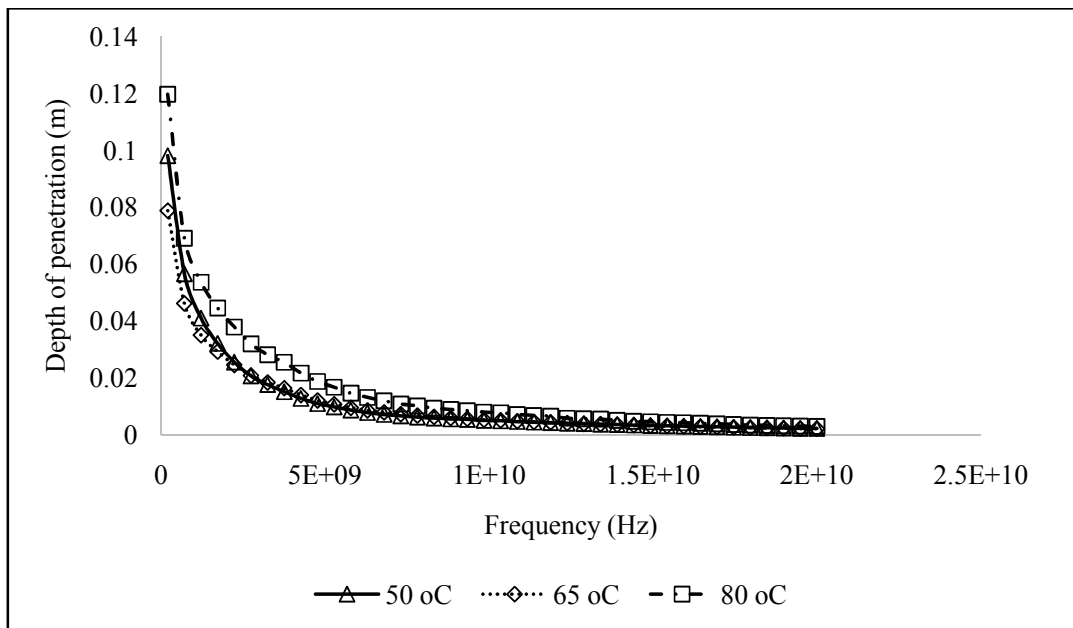

283

284

Fig. 8b.

285 **Fig. 8.** The plot of penetration depth of electromagnetic wave of *Rubus Fruticosus* (a)
 286 long and (b) short fruits against frequency as affected by temperature.

287 The relationship between the depth of electromagnetic wave penetration depth, frequency,
288 moisture content and temperature is given as regression equation in Table 7.

289 **Table 7. Relationship between depth of penetration, moisture content and temperature**

Variety	Regression Equations	R ²
Long	$DP = 0.0170 + 0.0009 T - 1.47e-11 f - 3.05e-15 Tf$	0.86
Short	$DP = 0.0036 + 0.0002 T - 7.46e-15 f - 1.33e-16 Tf$	0.87
Long	$DP = 0.5851 - 0.0070 h - 7.43e-11 f + 2.44e-12 hf$	0.91
Short	$DP = 0.1132 + 0.0264 h - 3.66e-11 f + 1.02e-12 hf$	0.83

290 DP = depth of penetration; **f** = frequency, **h** = moisture content; **T** = temperature

291 This means that higher moisture content does not reduce electromagnetic wave penetration in
292 *RubusFruticosus* fruits. Feng *et al.* (2002)^[31] reported negative influence of higher moisture
293 content on electromagnetic wave penetration depth of fresh Red Delicious apples. Similar
294 trend was also reported of legume flour by Guo *et al.* (2010).^[32]

295

296 4. CONCLUSIONS

297 Some engineering properties of *RubusFruticosus* fruits were studied and the following
298 conclusions were made: Temperature and moisture content highly affect both dielectric
299 constant and loss factor significantly (5%). Dielectric constant and loss factor of the fruits
300 both long and short fruits decreases with increase in frequency but increases with increase in
301 moisture content. In all, loss tangent and depth of penetration all decreases with increase in
302 frequency.

303

304 REFERENCES

- 305 Adamade, C.A. and Jackson, B.A. (2014). Agricultural mechanization: a strategy for
306 food sufficiency. *Journal of Agricultural Science* 4(3): 152-156.
- 307
- 308 Feng, H., Tang, J., & Cavalieri, R. (2002). Dielectric properties of dehydrated apples as
309 affected by moisture and temperature. *Transactions of the ASAE*, 45(1): 129–136.
- 310
- 311 Guo, W., Wang, S., Tiwari, G., Johnson, J.A., Tang, J. (2010). Temperature and
312 moisture dependent dielectric properties of legume flour associated with dielectric
313 heating. *LWT-Food Sci Technol* 43:193–201.
- 314
- 315 Hassan, H. E. (2002). Study of sorting and grading operations of Egyptian mature
316 oranges using visible laser. Ph.D. Th., Nat. Inst. of Laser In Enhanced Sc. (NILES),
317 Cairo U.: 12-15.

318

- 319 Ikediala, J. N., Tang, J. Drake, S. R. and Neven, L. G. (2000). Dielectric properties of
320 apple cultivars and codling moth larvae. *Trans. ASAE* 43(5): 1175–1184.
321
- 322 Irtwange, S. V. and Igbeka, J. C. (2004). Thermal conductivity of African yam bean
323 (*Sphenostlis Stenocarpa*) as affected by bulk density and moisture content. *Journal of*
324 *Applied Science, Engineering Technology*, 4(2): 1-6.
325
- 326 Kabuley, A., Herák, D. and Sedláček, A. (2011). Behaviour of different moisture
327 contents of *Jatropha curcas* L. seeds under compressive loading. *Res. Agri. Eng.* 57(2):
328 72 – 77.
329
- 330 Konak, M., Carman, K. and Aydin, C. (2002). Physical properties of chick pea seeds.
331 *Biosystem Engineering*. 182(1): 73-78.
332
- 333 Kawamura S., M. Natsuga, K. Takekura, and K. Itoh (2003). Development of an
334 automatic rice-quality inspection system. Ag. Process Eng. Lab, Grad. Sch. Ag. Sc.,
335 Hokkaido U., Sapporo 060-8589, Japan. *Computers and Electronics in Agriculture* 40:
336 115- 126
337
- 338 Nelson S. O, Guo W, Trabelsi S, Kays S. (2007). Dielectric spectroscopy of
339 watermelons for quality sensing. *Measurements science Technology*; 18: 1887–1892.
340 15.
341
- 342 Ndirika, V.I.O. and Oyeleke, O.O. (2006). Determination of some selected physical
343 properties and their relationship with moisture content for millet
344 (*Pennisetum Glaucum* L.). *Applied Engineering in Agric.* ASABE, vol. 22(2):
345
- 346 Olawale, A. S. (2012). Solid-liquid extraction of oils of African elemi's
347 (*Rubus Fruticosus* Schweinfurthii's) fruit. *Agri Eng Int: CIGR Journal*, 14 (2):
348 Manuscript No. 2083.
349
- 350 Oni, K, C. (2011). Man, machine and food insecurity. The ninety-fourth inaugural
351 lecture, University of Ilorin. Library and Publication Committee, University of Ilorin,
352 Nigeria. 1-70.
353
354
- 355 Orwa, C., A. Mutua, R. Kindt, R. Jamnadass, and A. Simons. (2009). Agroforestry
356 Database: a tree reference and selection guide version 4.0.
357 <http://www.worldagroforestry.org/af/treedb/>
358
- 359 Simonyan, K. J., Yiljep, Y. D., Oyatoyan, O. B. and Bawa, G. S. (2009). Effect of moisture on
360 some physical properties of *Lablab purpureus* (L.) sweet seeds. *Agricultural*
361 *Engineering International: the CIGR Ejournal Manuscript* 1279. Vol. XI.
362
- 363 Sirisomboon, P., Potncheloeampong, P. and Romphophek, T. (2007). Physical properties
364 of greensoya bean: Citrus fo sorting. *Journal of Food Engineering*, 79: 18-22.
365
- 366 Tripathi, M., Sahu, J.N., Ganesan, P., Monash, P. and Dey, T.K. (2015). Effect of

367 microwave frequency on dielectric properties of oil palmshell (OPS) and OPS char
368 synthesized by microwave pyrolysis of OPS. *Journal of Analytical and Applied*
369 *Pyrolysis*, 112: 306–312