

# CHARACTERIZATION OF ENGINEERING PROPERTIES (ELECTRICAL PROPERTIES) OF RUBUS FRUTICOSUS

## ABSTRACT

Some engineering properties of *Rubus Fruticosus* fruits, nuts and nutshell were characterized in order to provide fundamental information about their properties that will aid in designing modern technology for their handling, processing, storage, preservation, quality evaluation, distribution and marketing. The engineering properties studied is electrical properties. The fruits and nuts were conditioned to five and three different moisture and three and four different temperature levels, respectively before testing. American Standards for Testing and Materials (ASTM) and American Society of Agricultural and Bioresources Engineering (ASABE) standard procedures were used to test all the properties considered. Genstat, Mathlab, JMP in SAS, Duncan in SPSS and Microsoft excel statistical packages were used to analyze the generated data and the means were compared using the analysis of variance (ANOVA) at 5% level of probability. Dielectric constant and loss factor of both fruits decreased with increase in frequency (200MHz – 20GHz) and increased with temperature.. These information is recommended for design and development of efficient and effective technology for mechanizing *Rubus Fruticosus* products.

Keywords: Conductivity of dielectric, dielectric constant, Loss factor, Depth of microwave penetration

## 1. INTRODUCTION

Since man started discovering and cultivating various types of food, there has never been food without work or work for abundant food without machines. The effectiveness of these machines for mechanizing agricultural production depends on adequate knowledge of engineering properties of the products to be mass produced. Mechanization involves replacing human and animal labour with mechanical devices in crop production, processing, storage and distribution. It reduces production cost, ensures timeliness, and optimizes and protects product quality (Adamade and Jackson, 2014).

In handling and processing of agricultural products, some fundamental information about their characteristics is essentially needed. These information can be obtained through the knowledge of engineering properties of the products which constitutes essential data in designing and developing modern technologies for their production, handling, processing, storage, preservation, quality evaluation, distribution and marketing.

Engineering properties of agricultural product is profitably used for mechanizing their planting, harvesting, drying, processing and storage. It improves working efficiency of processing equipment, reduces losses and waste of constructional materials and, saves time and money. It also helps to maintain quality even in adverse storage and handling conditions and offer ways in which products can be utilized effectively. In recent time, strong growing interest on tree crop for food, money and medicine has been ongoing. This is because there is high demand of food due to effects of development and increasing population, besides, many economic tree crops are fading away without being harnessed and replaced.

Tree crops are those perennial woody plants with a single elongated stem of about 3m high and above (Orwa *et al.*, 2009) and, have head of branches and foliage on which fruits

grow. The fruits of tree crops are of great interest to food scientists, food producers and other scientists who work towards achieving food security. Modern agriculture has led to handling and processing of agricultural products into more useful product through various unit operations like cleaning, grading, sorting, drying, dehydration, storage, milling and transportation. *Rubus Fruticosus* fruit is an edible fruit from *Rubus Fruticosus* tree. It is eaten boiled or fresh for its nutritional and medicinal values.

Nigeria is blessed with a lot of economic tree crops that are rich in food and medicinal values. Development and high quest for foreign food have led to the abandonment of these crops; as a result, they are gradually fading away, attracting effect of desertification to our environment.

The agro-industries are dying down due to over dependent on root, tubers, vegetables and grains for raw materials. These products have a lot of competition which increases their price; hence the industries find it difficult to cope due to little or no profit margin. *Rubus Fruticosus* fruits are protenious and contain edible oil which waste away in the farm annually and when harvested, a lot of losses are encountered due to low patronage. Processing of this important fruit is still by conventional method which encourages losses of both oil and kernel, is unhygienic and subjects the fruits to vagaries of heat treatment which results in poor quality oil. Olawale (2012) reported that the extraction of oils from elemi pulp and kernel are not being carried out at commercial level at present, despite ready availability of the fruit in large quantity in Nigeria and elsewhere in Sub-Sahara Africa. This situation would improve if data needed for the design and operation of the oils' extraction plants are available. *Rubus Fruticosus* nuts which house the kernel are usually thrown away after eaten the mesocarp, causing environmental pollution and loss of biomass resources for alternative energy generation. These are as a result of limited knowledge of engineering characteristics of this important fruit and nuts that will promote mechanization of its processing into other useful products.

Oni (2011) reported in his inaugural lecture that good number of machines and equipment targeted at agro-industries are substandard and break down frequently. This problem could be because of wrong choice of construction materials, which could be attributed to poor knowledge of engineering characteristics of the targeted agricultural product. Besides, the efficiency of most of the imported processing machines are too poor because they were produced and calibrated based on the engineering data of agricultural products obtained from the manufacturing countries causing maintenance challenges and abandonment of these machines.

Literature has revealed that several studies have been carried out on engineering properties of different agricultural products; chick pea seeds (Konak *et al.*, 2002), millet (*Pennisetum glaucum* L.) (Ndirika and Oyeleke, 2006), *lablab purpureus* (L) (Simonyan *et al.*, 2009), *Jatropha curcas* L. fruit, nut and kernel (Sirisomboon *et al.*, (2007), *Jatropha curcas* L. seed (Kabutey, *et al.*, 2011), African yam bean (*Sphenostylis stenocarpa*) (Irtwange and Igbeka, 2004), water melon (Nelson *et al.*, 2007), orange (Hassan, 2002), rice (Kawamura *et al.*, 2003). Despite all these studies, there has not been any published work on engineering properties of *Rubus fruticosus* fruits. The objective of this study is to investigate the electrical properties of *Rubus fruticosus* fruits.

## 2. MATERIALS AND METHODS

### 2.1 ELECTRICAL PROPERTIES OF THE FRUITS

Electrical property involves heating the product due to its own electron losses when placed in an electrostatic field. Electrical properties are normally described in terms of dielectric

property of the product which include dielectric constant ( $\epsilon'$ ) and loss factor ( $\epsilon''$ ) (Wang *et al.*, 2003).

The dielectric constant of a material is associated with the energy storage capability in the electric field in the material and the loss factor (dissipation factor) has to do with the energy dissipation or absorption due to conversion of electric energy to heat energy in the material. The dielectric constant and loss factor are usually influenced by the volume of air void in sample, moisture content and temperature, frequency as well as chemical composition of the product (Nelson, 1982). In complex permittivity of most

materials, dielectric constant ( $\epsilon'$ ) and loss factor ( $\epsilon''$ ) are expressed as real and imaginary part of the permittivity ( $\epsilon$ ) as shown in Eq. 1 (Nelson, 2008):

$$\epsilon = \epsilon' - j\epsilon'' \quad (1)$$

The loss tangent is given as, Eq. 2:

$$\tan \delta = \frac{\epsilon''}{\epsilon'} \quad (2)$$

Dielectric properties of *Rubus Fruticosus* fruits were experimented at frequency range of 50 MHz – 40 GHz using dielectric analyzer (S – Parameter 8722ES). Samples of moisture content (5, 15, 30, 45, 60% (wb)) were conditioned to temperatures of 50 °C, 65 °C and 80 °C using water bath. These moisture and temperature levels were chosen considering samples under dried and softening conditions. The hot samples were quickly transferred to the probe of the calibrated system which measures and displays the fruits dielectric constant and loss factor automatically. Dissipation factor and depth of penetration were calculated as shown in Eqs 3 and 4, respectively.

$$\tan \delta = \frac{\epsilon''}{\epsilon'} \quad (3)$$

$$D_p = \frac{c}{2\pi f \sqrt{2\epsilon' \left[ \sqrt{1 + \left(\frac{\epsilon''}{\epsilon'}\right)^2} - 1 \right]}} \quad (4)$$

Where:  $c$  = speed of light ( $3 \times 10^8$  m/s),  $D_p$  = depth of penetration (mm)

The experiment was replicated three times for each temperature and moisture content studied.

### 3. RESULTS AND DISCUSSION

#### 3.1 ELECTRICAL PROPERTIES OF *RUBUS FRUTICOSUS* FRUITS

##### 3.1.1 Effect of moisture content and frequency on $\epsilon'$ and $\epsilon''$ of the fruits

Fig. 1 and 2 showed the dielectric properties of *Rubus Fruticosus* fruits as a function of frequency at five different moisture contents. The dielectric constant ( $\epsilon'$ ) and loss factor ( $\epsilon''$ ) for both long and short fruits decreased with increase in frequency and increased as moisture content rises from 5.00% – 60.00% wet basis. The dielectric constant ( $\epsilon'$ ) for short and long fruits increased from 2.06 – 6.79 and 1.12 – 33.68 respectively as moisture content increased from 5.00% – 60.00% wet basis. Loss factor ( $\epsilon''$ ) for short and long fruits also increased from 0.6594 – 5.99 and 1.22 – 14.99, respectively.

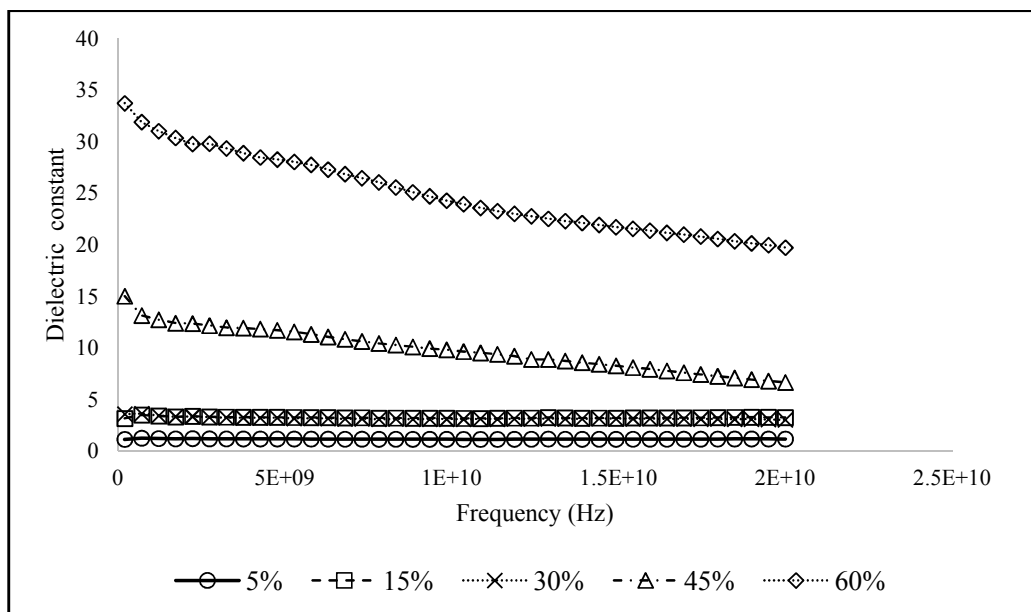


Fig 1a

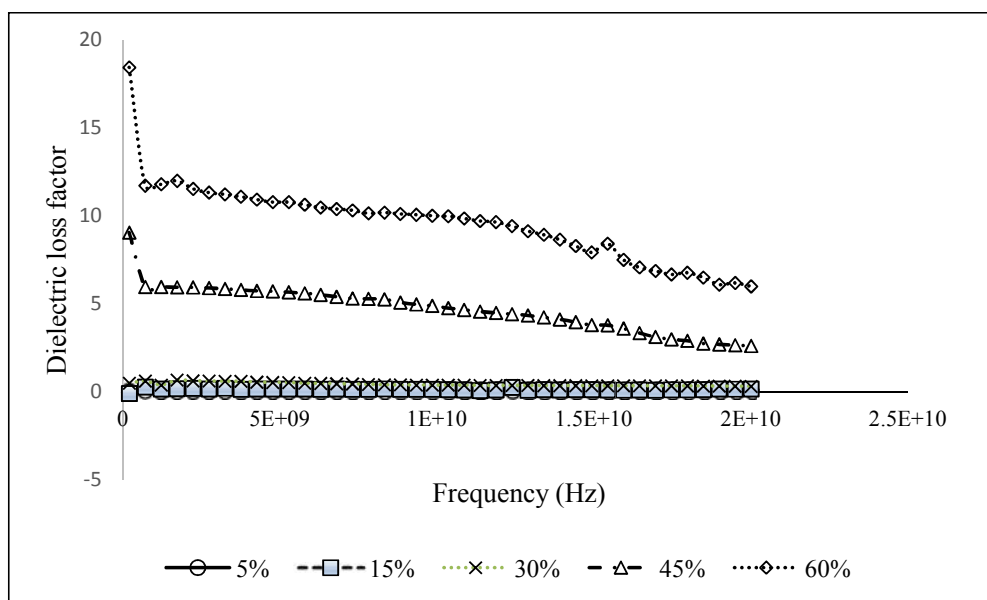


Fig 1b

Figure 1: The dependence of *Rubus Fruticosus* long fruits (a) dielectric constant and (b) dielectric loss factor on moisture content wet basis.

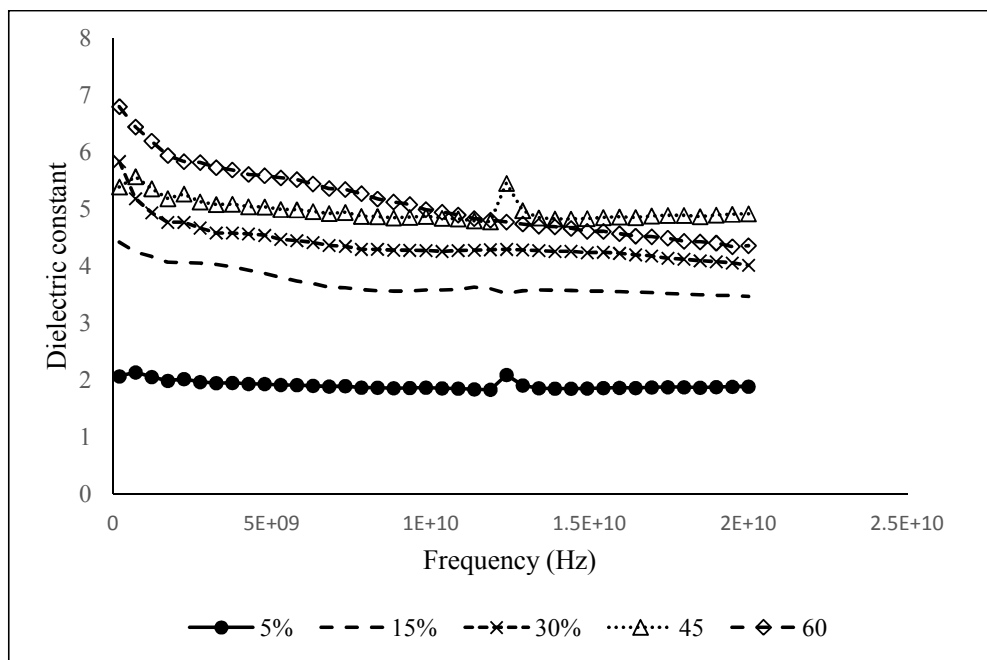


Fig. 2a

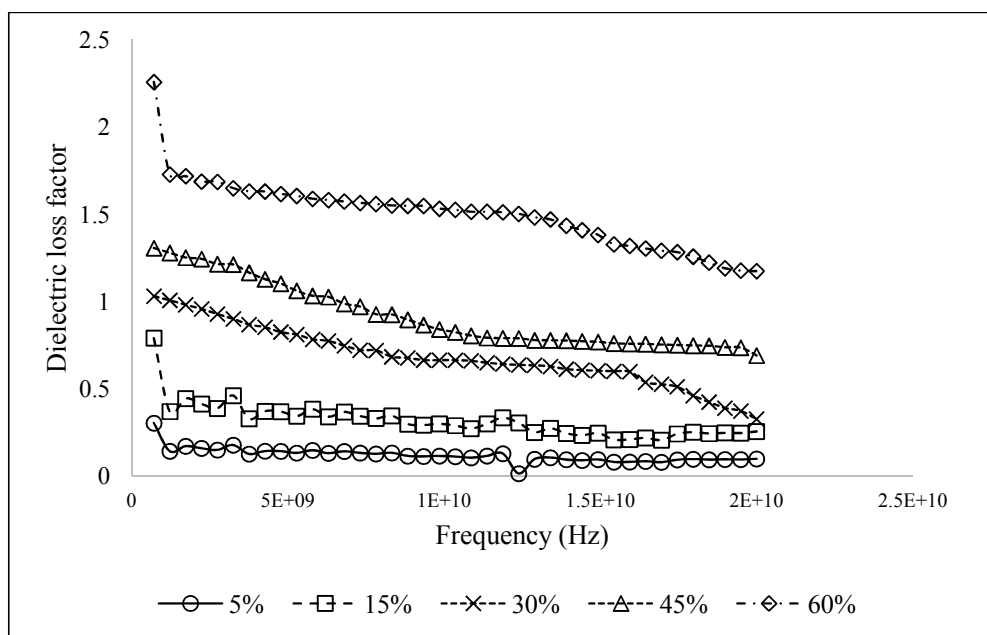


Fig. 2b

Figure 2: The dependence of (a) dielectric constant and (b) dielectric loss factor of *Rubus Fruticosus* short fruits on moisture content.

At lower moisture content (5% wet basis),  $\epsilon'$  and  $\epsilon''$  of both fruits are very low throughout the frequency range studied except  $\epsilon'$  of short fruit. The reduction in  $\epsilon'$  with moisture content and

frequency was reported to be due to low dispersion of water molecules caused by the effects of relaxation process and ionic conduction (Feng *et al.*, 2002). Long and short fruits had the lowest value of  $\epsilon'$  at 10GHz and 11GHz under dry condition (5.00% wet basis). respectively while under wet condition (60.00% wet basis) both fruits attend the lowest values at 20GHz. Ikediala *et al.*(2000) and Feng *et al.*(2002) observed similar trend with apple fruits at lower moisture content.

ANOVA at 5% level of significance summarized in Table 1 also revealed that moisture content and frequency had high significant effect on  $\epsilon'$  and  $\epsilon''$ .

**Table 1: ANOVA of dielectric properties of *Rubus Fruticosus* fruits as a function of moisture content**

Size	Dielectric property	F- value	P- value	F - critical
Long	$\epsilon'$	1315.51**	5.1E-119	2.43
	$\epsilon''$	654.89**	2.27E-96	2.43
Short	$\epsilon'$	1297.13**	1.5E-118	2.43
	$\epsilon''$	1577.42**	1.3E-122	2.43

NB; \*\* means highly significant at 5% level

Variation of  $\epsilon'$  with frequency and moisture content was not linear as shown in Table 2. High values of  $R^2$  obtained justifies the good fit of non-linear relationship while the equations can be used to estimate  $\epsilon'$  of the fruits at any given moisture content.

**Table 2: Regression equations of relationship between dielectric properties of *Rubus Fruticosus* fruits and moisture content**

Size	Dielectric properties	Regression equation	$R^2$
Long	$\epsilon'$	$2.34 h^2 - 8.61 h + 8.58$	0.96
	$\epsilon''$	$0.97 h^2 - 3.45 h + 2.68$	0.99
Short	$\epsilon'$	$1.31 \ln(h) + 5.95$	0.99
	$\epsilon''$	$2.37 h^{1.0549}$	0.99

h = moisture content.

### 3.1.2 Effect of temperature and frequency on $\epsilon'$ and $\epsilon''$ of the fruits

The variation of dielectric constant ( $\epsilon'$ ) and dielectric loss factor ( $\epsilon''$ ) with temperature plotted at frequency range of 200MHz to 20GHz is presented in Figs. 3 and 4

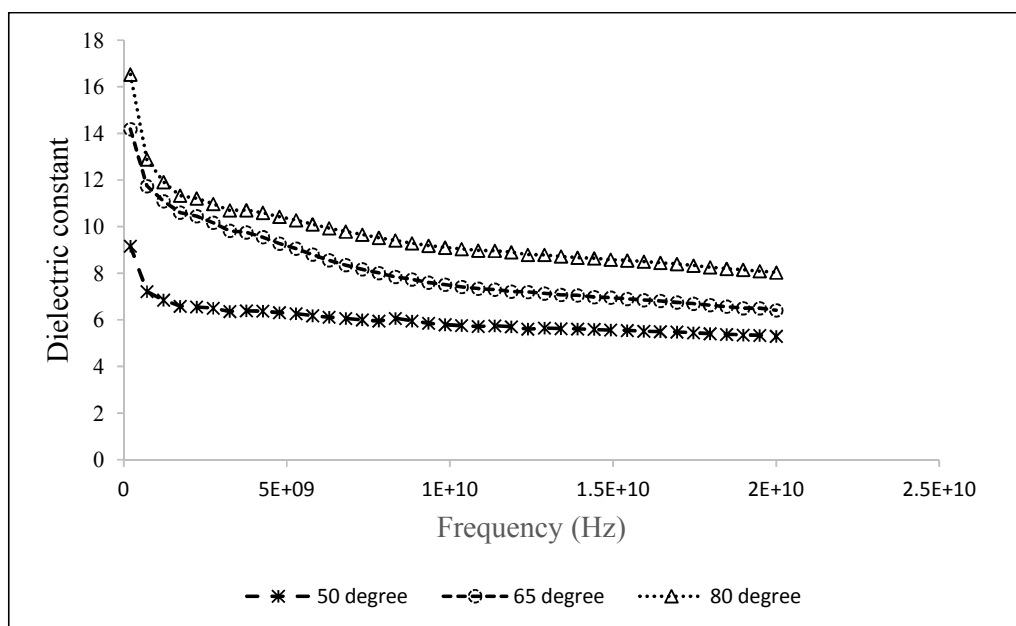


Fig 3a

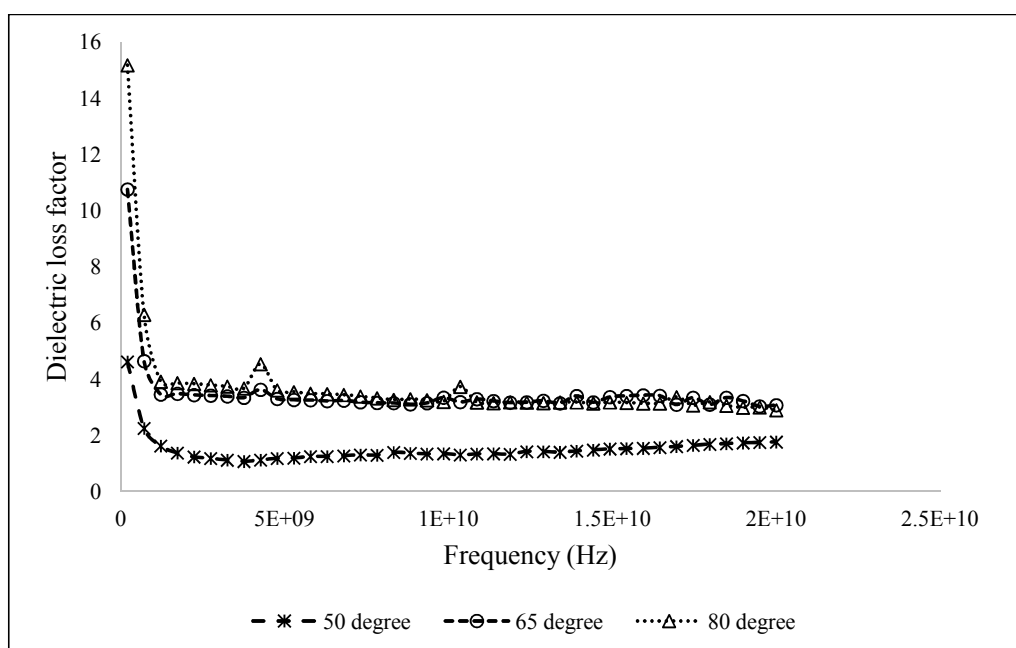


Fig 3b

Figure 3: The dependence of *Rubus Fruticosus Long* fruits (a) dielectric constant and (b) dielectric loss factor on temperature

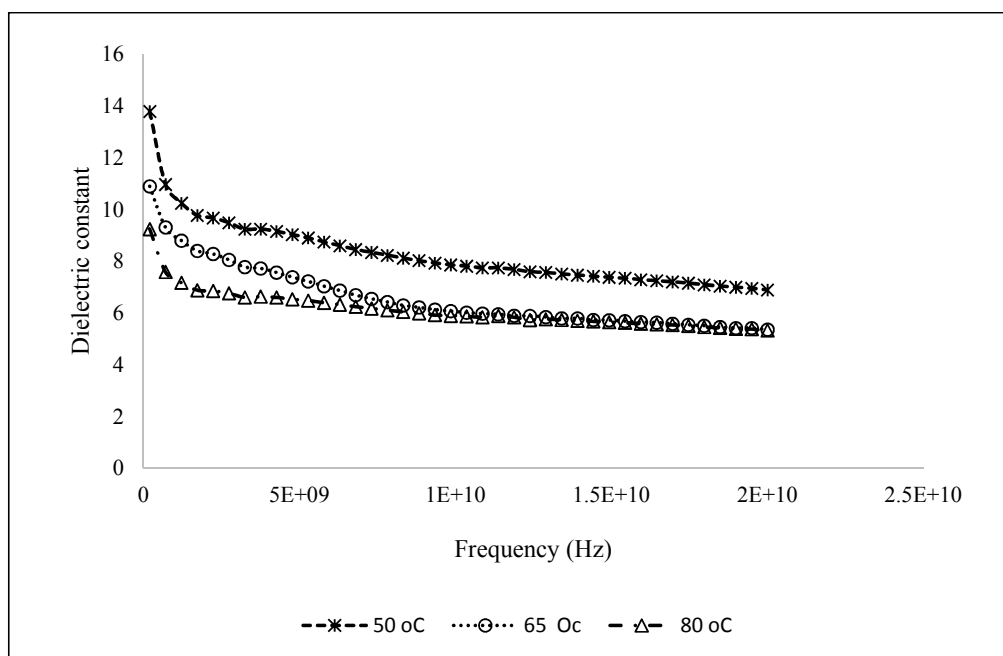


Fig. 4a

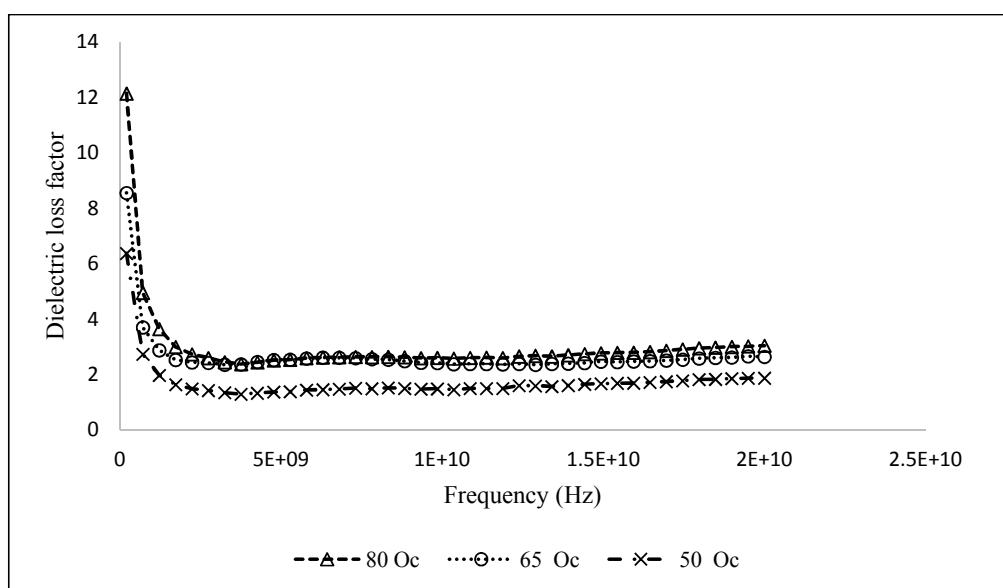


Fig. 4b

Figure 4: The dependence of *Rubus Fruticosus* short fruits (a) dielectric constant and (b) dielectric loss factor on temperature.

It was observed that the values of  $\epsilon'$  and  $\epsilon''$  are significantly (5%) low for all temperatures studied. Dielectric constant ( $\epsilon'$ ) of long fruit decreased with increase in frequency (9.16 – 5.29, 14.18 – 6.41 and 16.53 – 8.02 at 50 °C, 65 °C and 80 °C, respectively for 200MHz – 20GHz). Short fruit ( $\epsilon'$ ) also decreased with increase in frequency (13.79 – 6.88, 10.88 – 5.36 and 9.23 – 5.35 at 50 °C, 65 °C and 80 °C respectively for 200MHz – 20GHz).



Both fruits at all temperatures experienced a sharp decrease in dielectric constant ( $\epsilon'$ ) up to 2.23GHz afterwards, reduction becomes gradual. At lower temperature (50 °C), changes in  $\epsilon'$  of both fruits over frequency range considered are insignificant while significant (5%) changes were observed above 50 °C. Besides, dielectric loss factor ( $\epsilon''$ ) also had a very sharp decrease up to 1.21GHz and then increased as frequency increased in all the temperatures of both fruit sizes.

Loss factor ( $\epsilon''$ ) decreased from 5.05 – 4.61, 10.75 – 3.07 and 15.17 – 2.89 at 50 °C, 65 °C and 80 °C, respectively and increased with increase in temperature for long fruit and also decreased from 12.14 – 3.04, 8.55 – 2.64 and 6.37 – 1.87 at 50 °C, 65 °C and 80 °C respectively for short fruits. Low changes in  $\epsilon'$  and  $\epsilon''$  at low temperature could be because the dipole molecules are weak at low temperature causing slow movement of the molecules and ionic conductivity of the product. Similar observation was reported of apple, wheat, fresh fruits and vegetables (Feng *et al.*, 2002 and Nelson, 2003). The temperature dependence of  $\epsilon'$  and  $\epsilon''$  are highly significant (5%) for both fruits (Table 3).

**Table 3: NOVA of dielectric properties of *Rubus Fruticosus* fruits as a function of temperature.**

Size	Dielectric property	<i>F</i> - value	<i>P</i> - value	<i>F</i> - critical
Long	$\epsilon'$	372.78**	1.2E-40	3.11
	$\epsilon''$	109.85**	2.06E-23	3.11
Short	$\epsilon'$	424.69**	1.17E-42	3.11
	$\epsilon''$	112.29**	1.09E-23	3.11

Level of probability = 5%

The relationship between  $\epsilon'$  and  $\epsilon''$  with temperature could be established using regression functions and equations as shown in Table 4

**Table 4: Regression equations of relationship between dielectric properties of *Rubus Fruticosus* fruits and temperature.**


Size	Dielectric properties	Regression equation	R <sup>2</sup>
Long	$\epsilon'$	$3.29\ln(T) + 5.96$	0.99
	$\epsilon''$	$2.24 + 0.8205T - 0.3473T^2$	1
Short	$\epsilon'$	$45.12e^{0.1506T}$	0.92
	$\epsilon''$	$2.76 + 0.5673T - 0.303T^2$	1

T = temperature

211

### 212 3.1.2.1 Dissipation factor of *Rubus Fruticosus* fruits

213 Dissipation factor changed significantly (5%) as moisture level of the samples increased (Fig.  
214 5).

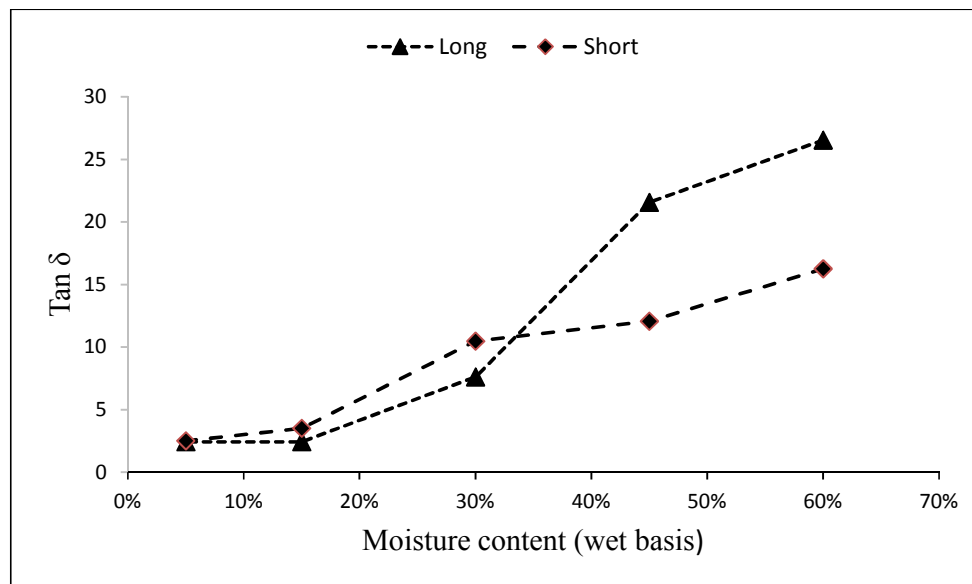

215

216 Figure 5: The plot of dissipation factor of *Rubus Fruticosus* fruits against moisture content.

217 Long and short fruit dissipation factors increased from 3.52 – 26.55 and 3.52 – 16.27  
218 respectively as moisture content increased from 5.00% – 60.00% wet basis and, 13.96 –  
219 23.19 and 15.53 – 22.06 respectively as temperature increases from 50 °C – 80 °C.

220 The relationship of dissipation factor with temperature as shown in Fig 6 was positive. At  
221 lower moisture content (5.00%), the dissipation factor of both fruits are relatively the same  
222 but from 30% wet basis and above, clear differences were observed. The behaviour of  
223 dissipation factor for both fruits was the same at all temperatures studied. The increase in  
224 dissipation factor with increase in temperature and moisture content confirms dielectric  
225 constant ( $\epsilon'$ ) and dielectric loss ( $\epsilon''$ ) dependence on the mobility of water molecules and ionic  
226 conductivity of the given sample.

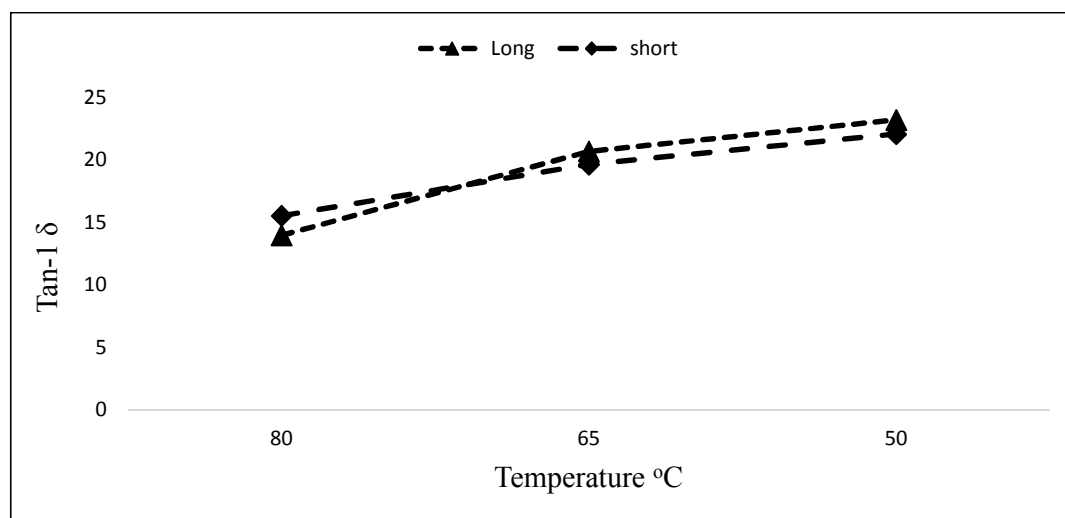


Figure 6: The plot of dissipation factor of *Rubus Fruticosus* fruits against Temperature

This result also showed that the ability of *Rubus Fruticosus* fruits to convert electromagnetic energy to heat energy is enhanced at higher temperature and moisture content. Regression equation showing the relationship between dissipation factor, temperature and moisture content is presented in Table 3.5, with high values of coefficient of determination ( $R^2$ ) which indicates good fit.

### 3.1.3 Depth of penetration of electromagnetic wave

The depth of penetration of electromagnetic waves in *Rubus Fruticosus* fruits decreased with increase in moisture content and frequency (Table 5 and, Fig 7a and b) for both fruits. Penetration depth had no regular behaviour with moisture content until the fruits attained 30% moisture level, further reduction in moisture content resulted in sharp increase in depth of penetration. This is as a result of sharp increase in dielectric constant at lower moisture content. At all level of moisture content studied, depth of penetration of both fruits were higher than microwave penetration in free space and deionized water at 915MHz and 2450MHz except that of 30% moisture content. This means that higher moisture content would not negatively affect electromagnetic wave penetration in *Rubus Fruticosus* fruits. Similar trend was reported of legume flour by Guo *et al.* (2010) while Feng *et al.* (2002) reported negative influence of higher moisture content on electromagnetic wave penetration depth of fresh Red Delicious apples.

Increase in temperature from 50 °C - 80 °C resulted in corresponding increase in depth of penetration as shown in Fig 8a and b. This is because the ionic conductivity and mobility process is enhanced by higher temperature. This finding negates the report of Tripathi *et al.* (2015) for palm shell. These results, suggests that penetration depth of microwave will not impose any challenge during microwave heating and drying of *Rubus Fruticosus* fruits especially at higher temperature.

253 **Table 5: Regression equations of relationship between dissipation factor**  
 254 ***Rubus Fruticosus*,**  
 255 **moisture content and temperature**

Size	Dielectric properties	Moisture content		Temperature	
		Regression equation	R <sup>2</sup>	Regression equation	R <sup>2</sup>
Long	Tan δ	$3.49\ h^2 - 11.17\ h + 10.32$	0.97	$3.02 + 13.05T - 2.11T^2$	1
Short	Tan δ	$0.2157\ h^2 + 2.11\ h + 0.469$	0.94	$15.58T^{0.3216}$	0.99

T = temperature ; h = moisture content.

259 **Table 6: Depth of electromagnetic wave penetration at constant moisture content**  
 260 **and temperature**

Size	5%		30%		60%		$\lambda_o$		$\lambda_{\text{water}}$	
	915 MHz	2450 MHz	915 MHz	2450 MHz	915 MHz	2450 MHz	915 MHz	2450 MHz	915 MHz	2450 MHz
Long	0.7481	0.3146	0.2028	0.0972	0.0405	0.0179	0.3277	0.1224	0.1225	0.0168
Short	1.27	1.67	0.9924	0.9162	0.1531	0.1605				

NB. All the values are in m; ( $\lambda_o$  = penetration depth of microwaves in free space;  $\lambda_{\text{water}}$  = penetration depth of microwaves in

deionized water. Tang *et al.*, 2002 and Feng *et al.*, 2002). All values are in meters.

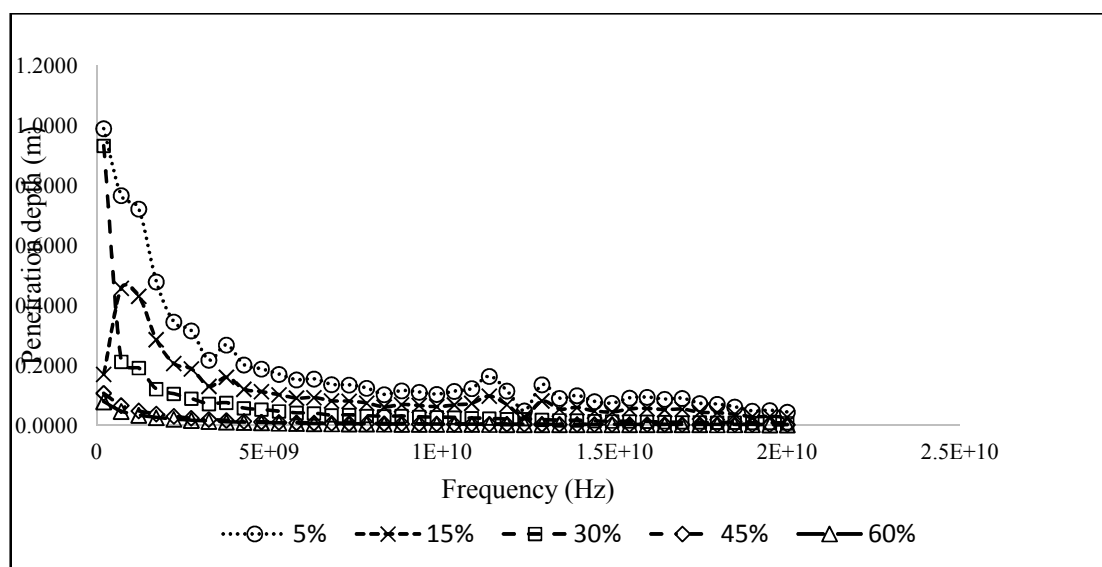


Fig. 7a

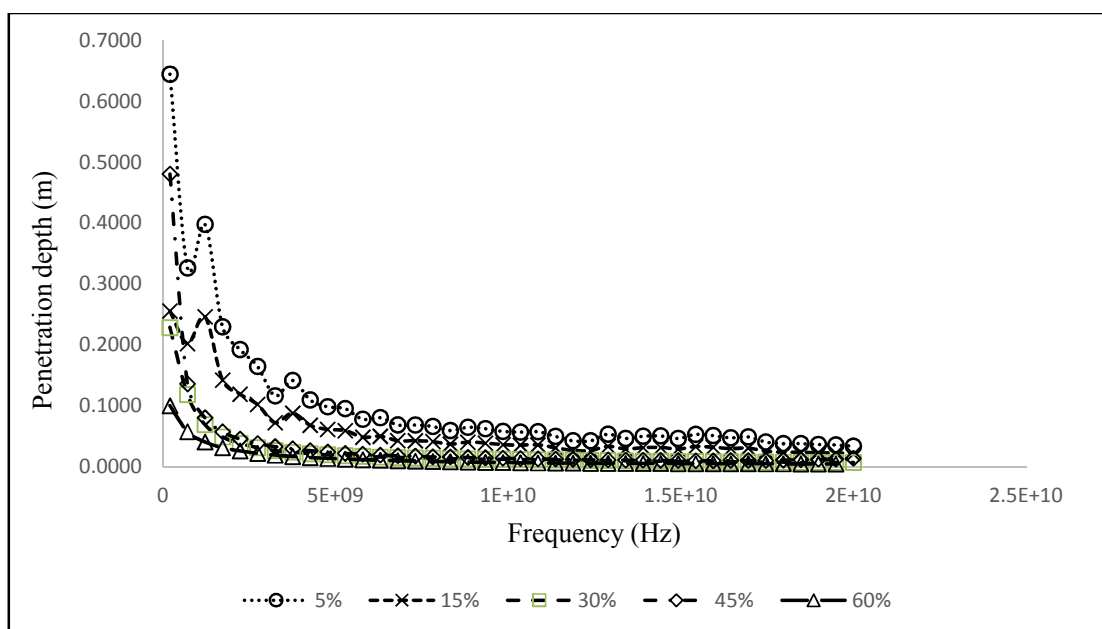


Fig. 7b

Figure 7: The plot of penetration depth of electromagnetic wave of *Rubus Fruticosus* (a) Long and (b) short fruits against frequency as affected by moisture content

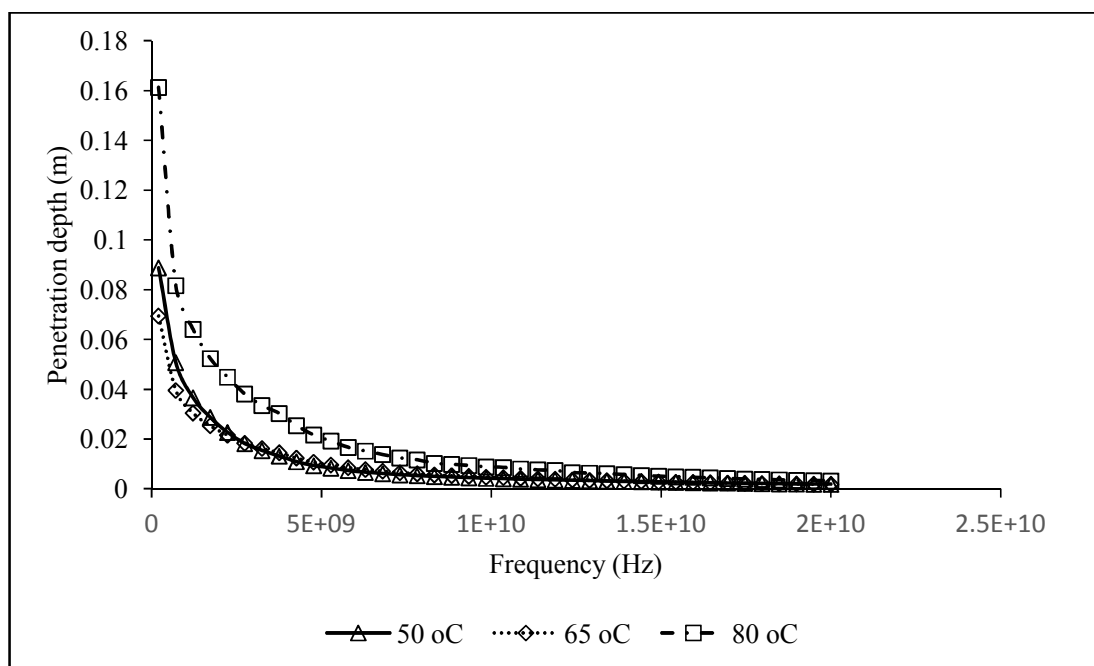


Fig. 8a

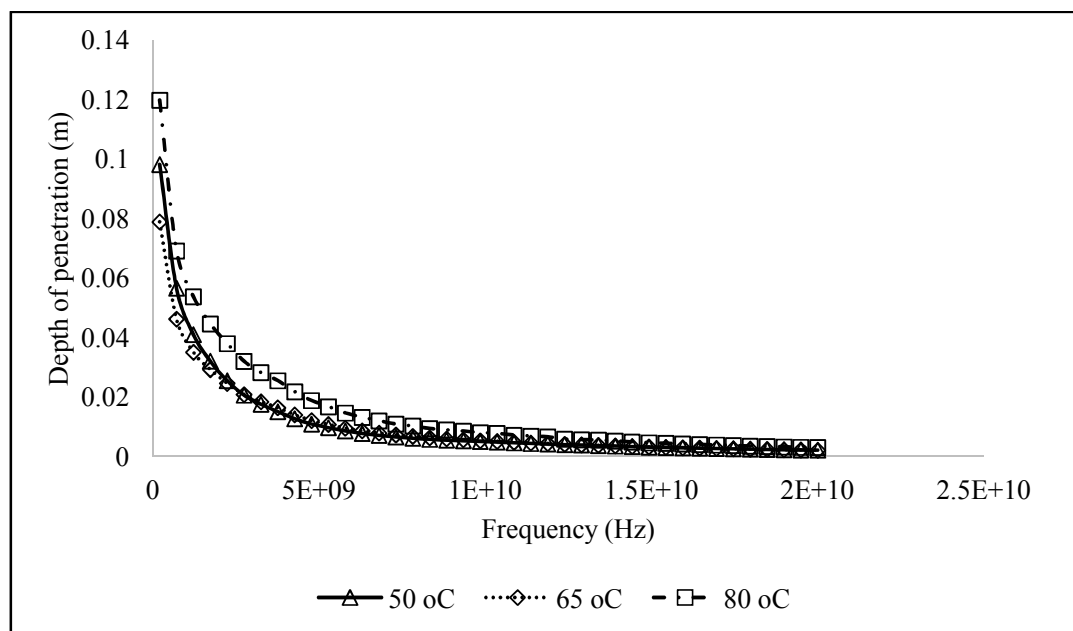


Fig. 8b

Figure 8: The plot of penetration depth of electromagnetic wave of *Rubus Fruticosus* (a) long and (b) short fruits against frequency as affected by temperature.

The relationship between the depth of electromagnetic wave penetration depth, frequency, moisture content and temperature is given as regression equation in Table 7.

**Table 7: Relationship between depth of penetration, moisture content and temperature**

Variety	Regression Equations	R <sup>2</sup>
Long	$DP = 0.0170 + 0.0009 T - 1.47e-11 f - 3.05e-15 Tf$	0.86
Short	$DP = 0.0036 + 0.0002 T - 7.46e-15 f - 1.33e-16 Tf$	0.87
Long	$DP = 0.5851 - 0.0070 h - 7.43e-11 f + 2.44e-12 hf$	0.91
Short	$DP = 0.1132 + 0.0264 h - 3.66e-11 f + 1.02e-12 hf$	0.83

DP = depth of penetration; f = frequency, h = moisture content; T = temperature

This means that higher moisture content does not reduce electromagnetic wave penetration in *Rubus Fruticosus* fruits. Feng *et al.* (2002) reported negative influence of higher moisture content on electromagnetic wave penetration depth of fresh Red Delicious apples. Similar trend was also reported of legume flour by Guo *et al.* (2010).

#### 4. CONCLUSIONS

Some engineering properties of *Rubus Fruticosus* fruits, nut and nutshell were studied and the following conclusions were made: Temperature and moisture content highly affect both dielectric constant and loss factor significantly (5%).

#### REFERENCES

- Adamade, C.A. and Jackson, B.A. (2014). Agricultural mechanization: a strategy for food sufficiency. *Journal of Agricultural Science* 4(3): 152-156.
- Feng, H., Tang, J., & Cavalieri, R. (2002). Dielectric properties of dehydrated apples as affected by moisture and temperature. *Transactions of the ASAE*, 45(1): 129–136.
- Guo, W., Wang, S., Tiwari, G., Johnson, J.A., Tang, J. (2010). Temperature and moisture dependent dielectric properties of legume flour associated with dielectric heating. *LWT-Food Sci Technol* 43:193–201.
- Hassan, H. E. (2002). Study of sorting and grading operations of Egyptian mature oranges using visible laser. Ph.D. Th., Nat. Inst. of Laser In Enhanced Sc. (NILES), Cairo U.: 12-15.
- Ikediala, J. N., Tang, J. Drake, S. R. and Neven, L. G. (2000). Dielectric properties of apple cultivars and codling moth larvae. *Trans. ASAE* 43(5): 1175–1184.

- Irtwange, S. V. and Igbeka, J. C. (2004). Thermal conductivity of African yam bean (*Sphenostlis Stenocarpa*) as affected by bulk density and moisture content. *Journal of Applied Science, Engineering Technology*, 4(2): 1-6.
- Kabukey, A., Herák, D. and Sedláček, A. (2011). Behaviour of different moisture contents of *Jatropha curcas* L. seeds under compressive loading. *Res. Agri. Eng.* 57(2): 72 – 77.
- Konak, M., Carman, K. and Aydin, C. (2002). Physical properties of chick pea seeds. *Biosystem Engineering*. 182(1): 73-78.
- Kawamura S., M. Natsuga, K. Takekura, and K. Itoh (2003). Development of an automatic rice-quality inspection system. *Ag. Process Eng. Lab, Grad. Sch. Ag. Sc., Hokkaido U., Sapporo 060-8589, Japan. Computers and Electronics in Agriculture* 40: 115- 126
- Nelson S. O, Guo W, Trabelsi S, Kays S. (2007). Dielectric spectroscopy of watermelons for quality sensing. *Measurements science Technology*; 18: 1887–1892.
- Ndirika, V.I.O. and Oyeleke, O.O. (2006). Determination of some selected physical properties and their relationship with moisture content for millet (*Pennisetum Glaucum* L.). *Applied Engineering in Agric.* ASABE, vol. 22(2):
- Olawale, A. S. (2012). Solid-liquid extraction of oils of African elemi's (*Rubus Fruticosus schweinfurthii*'s) fruit. *Agri Eng Int: CIGR Journal*, 14 (2): Manuscript No. 2083.
- Oni, K, C. (2011). Man, machine and food insecurity. The ninety-fourth inaugural lecture, University of Ilorin. Library and Publication Committee, University of Ilorin, Nigeria. 1-70.
- Orwa, C., A. Mutua, R. Kindt, R. Jamnadass, and A. Simons. (2009). Agroforestry Database: a tree reference and selection guide version 4.0. <http://www.worldagroforestry.org/af/treedb/>
- Simonyan, K. J., Yiljep, Y. D., Oyatoyan, O. B. and Bawa, G. S. (2009). Effect of moisture on some physical properties of *Lablab purpureus* (L.) sweet seeds. *Agricultural Engineering International: the CIGR Ejournal Manuscript* 1279. Vol. XI.
- Sirisomboon, P., Potncheloeampong, P. and Romphophek, T. (2007). Physical properties of greensoya bean: Citrus fo sorting. *Journal of Food Engineering*, 79: 18-22.
- Tripathi, M., Sahu, J.N., Ganesan, P., Monash, P. and Dey, T.K. (2015). Effect of microwave frequency on dielectric properties of oil palmshell (OPS) and OPS char synthesized by microwave pyrolysis of OPS. *Journal of Analytical and Applied Pyrolysis*, 112: 306–312