

2-Dimensional Electrical Resistivity Tomography of Bitumen Occurrence in Agbabu, Southwestern, Nigeria.

ABSTRACT

The Electrical Resistivity Tomography (ERT) data was acquired within the area suspected to have high potential for bitumen occurrence using the Wenner-Schlumberger configuration. PASI 16GL-N Earth resistivity meter instrument was used to acquire data along five (5) traverses with 5m electrode spacing and traverses length 150m. The apparent resistivity values obtained were processed using RES2DINV software which helped to automatically obtain the 2D inversion model of the subsurface. This work has shown that the occurrence of bitumen was found between the depth of 13.4m and 9.93m for Traverses 1,2,3 and Traverses 4,5 respectively in 2-Dimensional electrical resistivity images which corroborated by boreholes with a depth of about 18m. The results of this research indicated that the bitumen is characterized by good lateral continuity and sufficiently thick for commercial exploitation (i.e., average thickness of 11.67m).

Keywords: Agbabu; Traverse; Bitumen; Occurrence; Depth

1. INTRODUCTION

The bedrock of Nigeria's economy before the discovery of petroleum deposit had been the solid minerals and agricultural sectors, but currently, it is the oil and gas sector. Over 80% of the country's revenue comes from export and domestic sales of oil and gas. As the hydrocarbon potentials of the prolific Niger Delta becomes depleted or in the near future may be exhausted due to continuous exploitation, attention needs to be shifted to other source of revenue. Bitumen which is known as asphalt or tar sand is the heavy oil in the bituminous sand which is a very dark coloured, sticky and highly viscous liquid or semi-solid form of petroleum. The occurrence and structural settings of the Agbabu tar sand (bitumen) deposits have been investigated due to the economic importance of bitumen as a readily available alternative source of energy [10].

Electrical resistivity tomography (ERT) is one of the most popular techniques for the shallow subsurface and is applied for hydrogeological, engineering, or agricultural questions. Applications cover a wide range of scales, from millimeter/centimeter scales at laboratory samples, decimeter to meter scale in soils, meter to decimeters for groundwater questions, but can reach several hundred meters or even kilometer for deep geological structures.

Variations in electrical resistivity (or conductivity) typically correlate with variations in lithology, water saturation, fluid conductivity, porosity and permeability, which may be used to map stratigraphic units, geological structure, sinkholes, fractures and groundwater. Resistivity data are then recorded via complex combinations of current and potential electrode pairs to build up a pseudo cross-section of apparent resistivity beneath the survey line. The depth of

38 investigation depends on the electrode separation and geometry, with greater electrode
39 separations yielding bulk resistivity measurements from greater depths.

40 The recorded data are transferred to a PC for processing. In order to derive a cross-sectional
41 model of true ground resistivity, the measured data are subject to a finite-difference inversion
42 process using the RES2DINV software.

43 Data processing is based on an iterative routine involving determination of a two-dimensional
44 (2D) simulated model of the subsurface. Convergence between theoretical and observed data is
45 achieved by non-linear least squares optimization. The extent to which the observed and
46 calculated theoretical models agree is an indication of the validity of the true resistivity model
47 (indicated by the final root-mean-squared (RMS) error).


48 The true resistivity models are presented as colour contour sections revealing spatial variation in
49 subsurface resistivity. The 2D method of presenting resistivity data is limited where highly irregular
50 or complex geological features are present. Constraints: Readings can be affected by poor electrical
51 contact at the surface. An increased electrode array length is required to locate increased depths of
52 interest therefore the site layout must permit long arrays. Resolution of target features decreases
53 with increased depth of burial. To interpret the data from a 2-D imaging survey, a 2-D model for the
54 sub-surface which consists of a large number of rectangular blocks is usually used. A computer
55 program is then used to determine the resistivity of the blocks so that the calculated apparent
56 resistivity values agree with the measured values from the field survey [8]. The computer program
57 RES2DINV will automatically subdivide the subsurface into a number of blocks, and it then uses a
58 least-square inversion scheme to determine the appropriate resistivity value for each block. The
59 location of the electrodes and apparent resistivity values must be entered into a number of blocks,
60 and it then uses a least-squares inversion scheme to determine the appropriate resistivity value for
61 each block. apparent resistivity values must be entered into text file which can be read by
62 the RES2DINV program [9].

63 **1.1 Geology and description of the study area**

64 The study area is located within the geographical grids of latitude 6° 35' 16.3" N and 6° 37' 13.9"
65 N and longitude 4° 49' 29.0" E and 4° 50' 20.7" E in Odigbo local government area of Ondo
66 State. It falls within the sedimentary terrain in the Dahomey basin of southwestern, Nigeria.

67 The Dahomey basin is an Atlantic margin basin containing Mesozoic-Cenozoic sedimentary
68 succession reaching a thickness of over 3000m. It extends from south-eastern Ghana to the
69 western flank of the Niger Delta. Its stratigraphy is classified by various authors into Abeokuta
70 Group, Imo Group, Oshosun Formation, Ilaro Formation and Coastal Plain sands and Alluvium
71 [1, 2, 6]. The Agbabu area is underlain by the sediments of the Imo group.

72

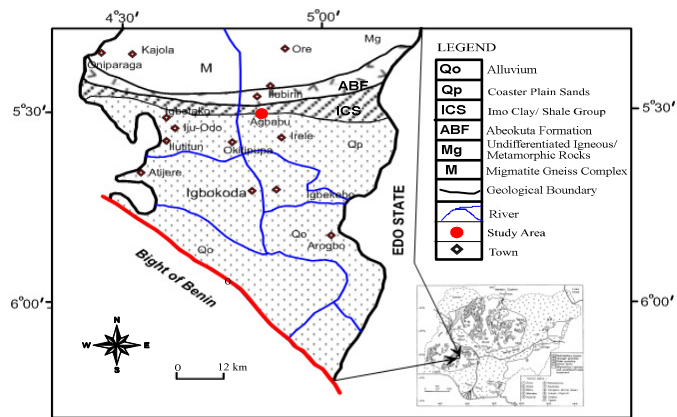

83

84 | **Figure 1:** Geological Map of southern part of Ondo State showing the Study Area
 85 (Modified After PTF, 1997).

86

87 2. METHODOLOGY

88 In this research work, the Wenner-Schlumberger array in electrical resistivity survey was
 89 adopted. The investigation was carried out in Agbabu, southwestern, Ondo state, Nigeria. The
 90 basic field equipment for this study is the PASI 16 GL-N Earth resistivity meter.

91 This is a new hybrid between the Wenner-Schlumberger arrays arising out of the relatively
 92 recent work with electrical imaging surveys [10]. The classical Schlumberger array is one of the
 93 most commonly used array for resistivity sounding survey. The “n” factor for this array is the
 94 ratio of the distance between the $C_1 - P_1$ (or $P_2 - C_2$) electrodes to the spacing between the
 95 $P_1 - P_2$ potential pair. The sensitivity pattern for the Schlumberger array is slightly different from
 96 the Wenner array with a slight vertical curvature below the center of the array, slightly lower
 97 sensitivity values in the regions between the C_1 and P_1 (P_2 and C_2) also and electrodes (this
 98 sentence needs revision). There is a slightly greater concentration of high sensitivity values
 99 below the $P_1 - P_2$ electrodes. This means that this array is moderately sensitive to both
 100 horizontal and vertical structures. In areas where both of geological structures are expected this
 101 array might be a good compromise between the Wenner and the dipole-dipole array. The median
 102 depth of investigation for this array is about 10% larger than that for the Wenner array for the
 103 same distance between the outer (C_1 and C_2) electrodes. The signal strength for this array is
 104 smaller than that for the Wenner array, but it is higher than the dipole-dipole array [8].

Formatted: Font: 12 pt, Font color: Black, English (United Kingdom), Highlight

105

106

107

108

109

110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126

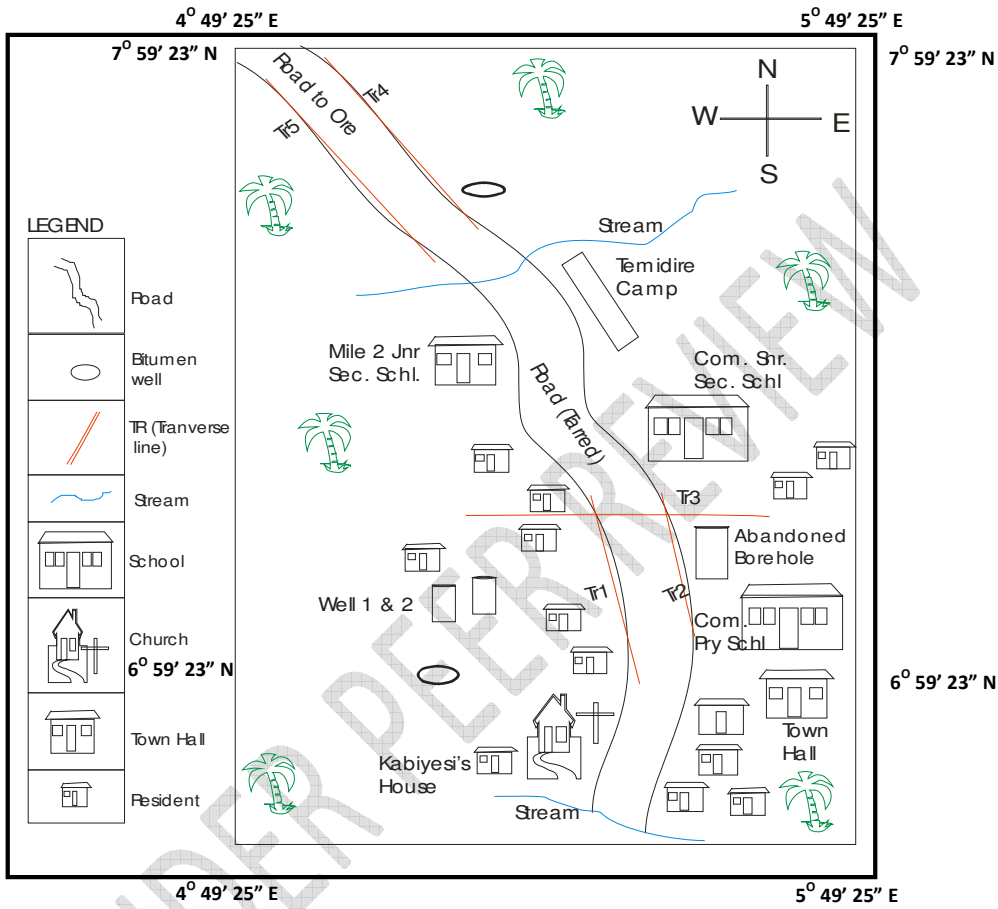


Figure 2: Base Map-map of the Study-study Areaarea.

127
128
129
130
131
132
133
134

2.1 Theory of electrical resistivity method for wenner-schlumberger array

From the theory, we have that the potential at M due to A is

$$V_M = \frac{\rho I}{2\pi} \left[\frac{1}{a(n+1)} - \frac{1}{na} \right]$$

Where a = midpoint = electrode spacing

n = integer value , ρ = layer resistivity

The potential at N due to B is

135 $V_N = \frac{\rho l}{2\pi} \left[\frac{1}{a(n+1)} - \frac{1}{na} \right]$

136 The potential difference dV between the two potential is therefore given by

137 $dV = V_M - V_N$

138 $= \frac{\rho l}{2\pi} \left[\left(\frac{1}{a(n+1)} - \frac{1}{na} \right) - \left(\frac{1}{a(n+1)} - \frac{1}{na} \right) \right]$

139 $= \frac{\rho l}{2\pi} \left[\left(\frac{1}{a(n+1)} - \frac{1}{na} \right) - \frac{1}{a(n+1)} + \frac{1}{na} \right]$

140 $= \frac{\rho l}{2\pi} \left[\left(\frac{1}{a(n+1)} - \frac{1}{na} \right) - \frac{1}{a(n+1)} + \frac{1}{na} \right]$

141 $= \frac{\rho l}{2\pi} \left(\frac{(n+1) - n - n + (n+1)}{an(n+1)} \right)$

142 $dV = \frac{\rho l}{2\pi} \left(\frac{2(n+1) - 2n}{an(n+1)} \right) = \frac{\rho l}{2\pi} \left(\frac{2}{an(n+1)} \right)$

143 Therefore, $\rho = \frac{dV\pi}{l} [an(n+1)]$.

144 Where $\frac{dV}{l} = R\rho = R\pi [an(n+1)]$

145 $k = \pi [an(n+1)]$

146 Then, $\rho = RK$

147 Where k is the geometric factor.

148

149


150

151

152

153

154

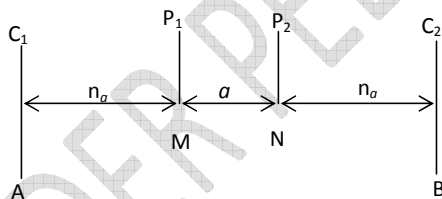


155 **Figure 3:** Sketch of Wenner- Schlumberger array.

156

157 **3. RESULTS AND DISCUSSION**

158 **Agbabu Traverse One:** The inverted 2-D resistivity section shows the image of the subsurface
 159 to a depth of 17.3m as shown in Figure 4. The length of this traverse is 150m and oriented in an
 160 approximately N-S direction. The first layer designated with green (there are many shades of
 161 green, which one are you talking about? It is better to indicate these things in the figure itself)
 162 and yellow colour has resistivity values in the range of 75—210Ωm. It can be seen from this
 163 profile that the topsoil which varies between 0- 3.88m in depth with thickness of 3.88m
 164 probably consists of sandy soil.

165 | The second geo-electric layer has resistivity in the range of 200–700Ωm which is indicated by
 166 | brown, deep brown, red and purple. This formation occurs at a depth of 3.88m–13.4m between
 167 | lateral distances 52m–53m, 63m–72m, 84m–107m and 121m–132m could possibly be
 168 | accumulated of bitumen. Evidently, the profile length of 84m–107m has a sharp increase of
 169 | resistivity (500 – 700Ωm) which could now indicate possible accumulation of bitumen. The
 170 | third layer (again, which color? And which figure?) has a low resistivity from 10–74.3Ωm. It has a
 171 | thickness of about 3.9m and could be a possible aquiferous zone. (Divide Figure 4 into A, B, C
 172 | etc and indicate in the text which Figure you are talking about).

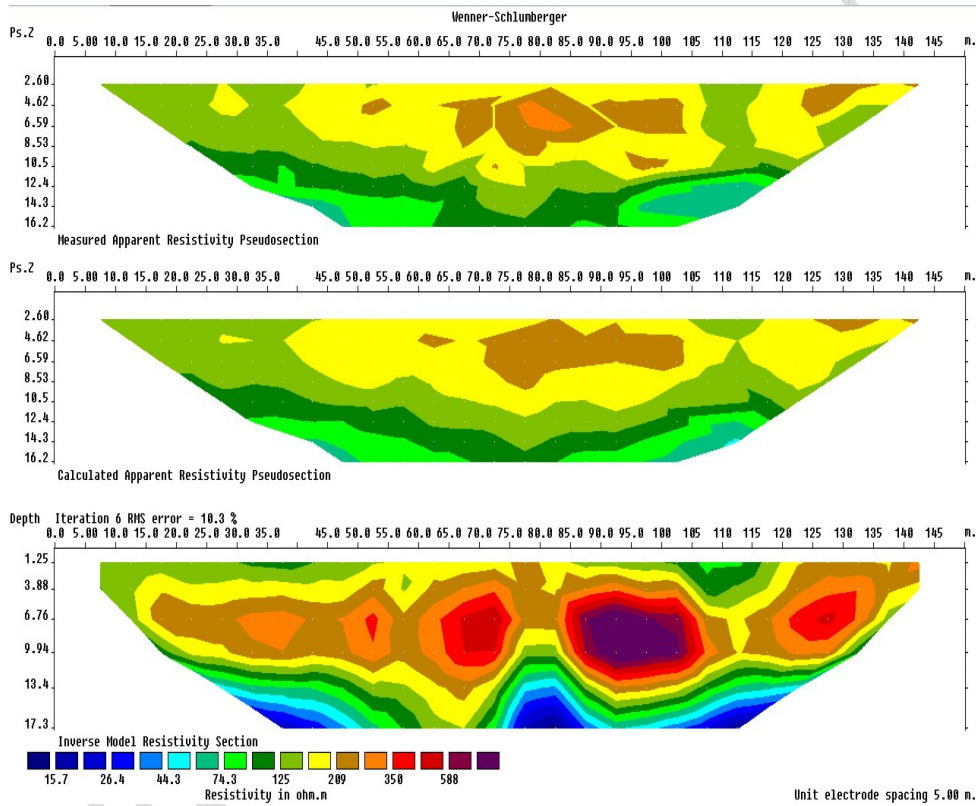

173


174

175

Figure4: Inverted 2D Resistivity-resistivity Section-section along Traverse 1.

176 **Agbabu Traverse Two:** The inverted 2-D resistivity section shows the image of the subsurface
 177 to a depth of 17.3m as shown in Figure 5. The length of this traverse is 150m and oriented in an
 178 approximately N-S direction. The first layer has an increase resistivity values ranging from 166 -
 179 = 495Ωm designated with brown, deep brown, red and purple (again which figure are you talking
 180 about. Designate as A, B, C and then mention that in the text. I have done this for you in Figure
 181 5. You can do it at other places). This formation occurs at a depth of 0 – 13.4m between lateral
 182 distances 30m-40m, 60m-85m and 98m-132m could possibly be accumulated of bitumen.
 183 Evidently, the profile length of 30m-40m and 60m-85m having a sharp increase of resistivity
 184 (371—495Ωm) which could now indicate possible accumulation of bitumen (Indicate sandy soil,
 185 bitumen accumulation etc in the figure. Your description of first layer, second layer etc. is hard
 186 to follow).
 187 The second geo-electric layer has undulating thickness between 2.15 and 3.9m down the profile
 188 with resistivity values between 74.4-166Ωm could probably consist of sandy soil. The third geo-
 189 electric layer extends to a depth from 15.3m-17.3m along a lateral distances 30m-40m and 85m-
 190 110m has a low resistivity from 10–50Ωm. It has a thickness of about 2m could possibly serve as
 191 a perched aquifer.

192

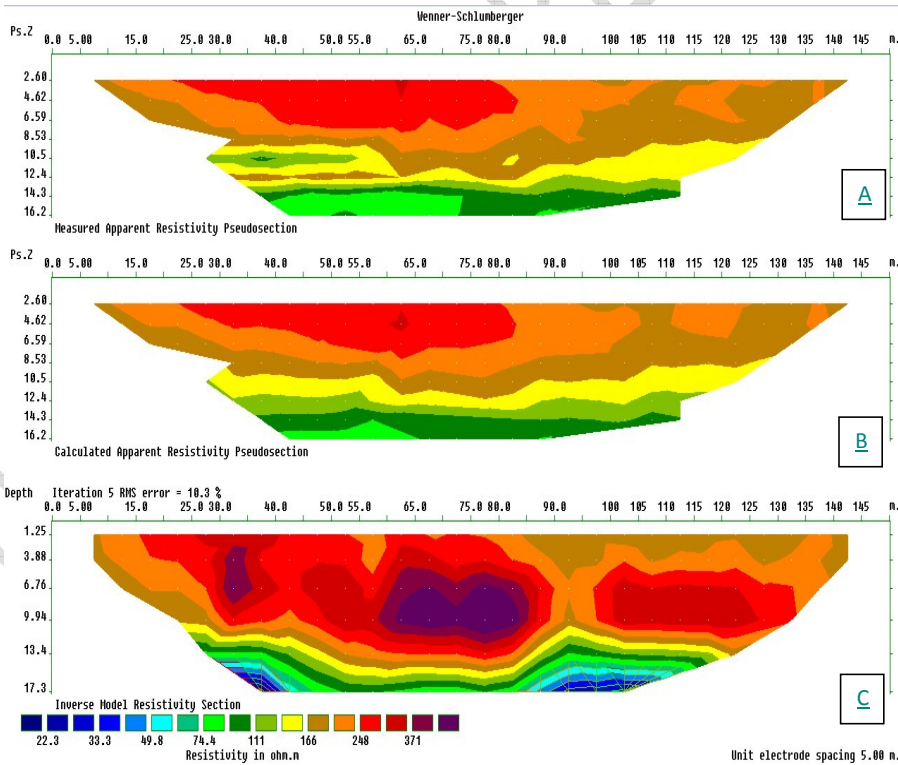

193

194

195

Figure 5: Inverted 2D-Resistivity Section along Traverse Two2.

196

197

198

199

200

201

202

203

204

205

206


207

208

209

210

211

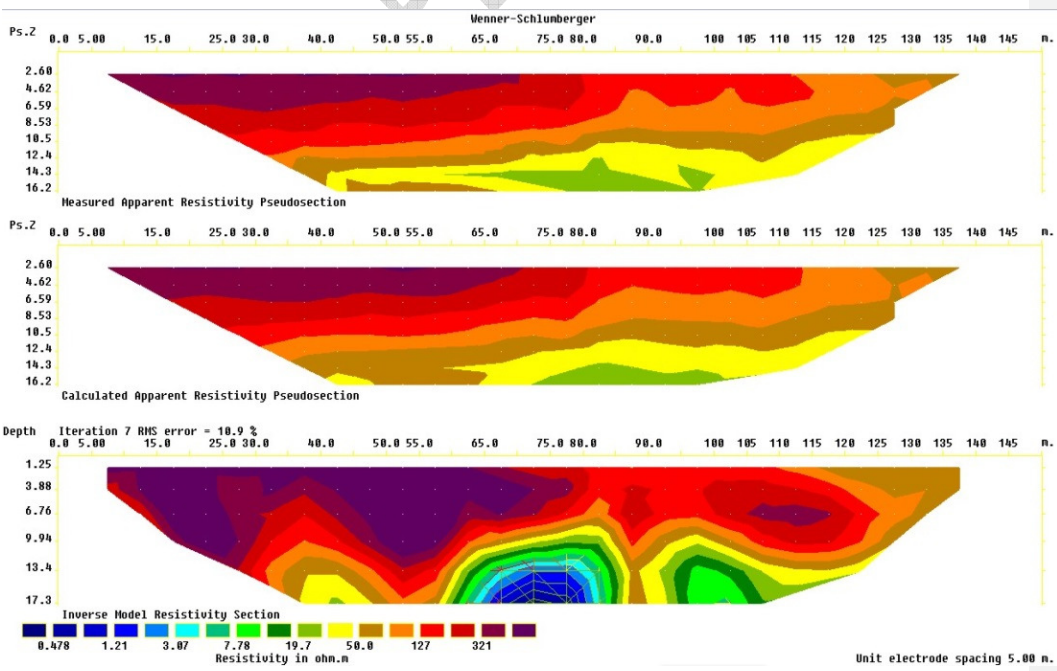

212

213 | **Figure 6:** Inverted 2D-~~r~~Resistivity ~~Section-section~~ along Traverse ~~Three~~3.


214 | **Agbabu Traverse Four:** The inverted 2-D resistivity section shows the image of the subsurface
215 | to a depth of 17.3m as shown in Figure 7. The length of this traverse is 150m and oriented in an
216 | approximately N-S direction.

217 | The first layer has an increase resistivity values ranging from 107 – 465Ωm designated with red
218 | and purple colour. This formation occurs at a depth of 9.94m along a lateral distances 17.5m-
219 | 142.5m could possibly be accumulated of bitumen. It has a thickness ranging from 1.25m-9.94m.
220 | Evidently, the lateral profile length having a sharp increase of resistivity (286 – 465Ωm) could
221 | now indicate possible accumulation of bitumen.

222 | The second geo-electric layer designated with brown, yellow and green colour has undulating
223 | along lateral distance 35m-55m. It has resistivity values between 5.61-107Ωm could probably
224 | consist of sandy soil. This formation has a thickness varying from 9.94m-17.3m. The third geo-
225 | electric layer designated with light blue and deep blue colour extends to a depth from 13.34m-
226 | 17.3m along a lateral distances 34m-53m having a low resistivity from 0 – 5.61Ωm. It has a
227 | thickness of about 3.9m, which could possibly host a large volume of underground water
228 | resources.

229

UNDER PEER REVIEW

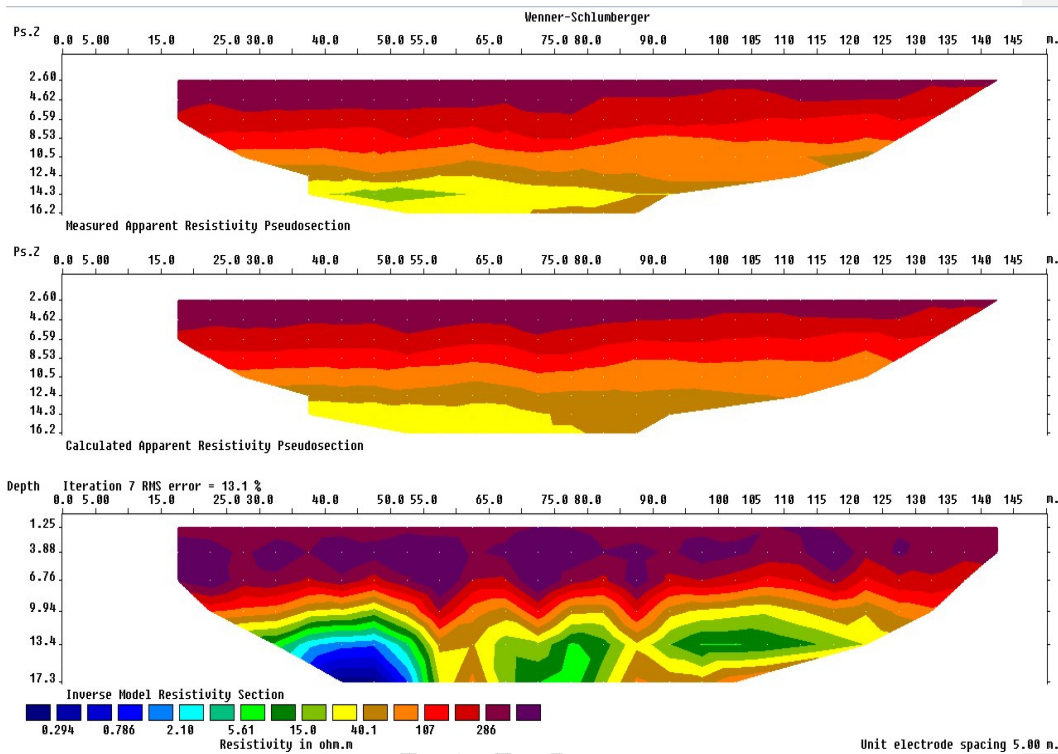

230

231

Figure 7: Inverted 2D-Resistivity Section along Traverse **Four**.

232

Agbabu Traverse Five: The inverted 2-D resistivity section shows the image of the subsurface to a depth of 17.3m as shown in Figure 8. The length of this traverse is 150m and oriented in an approximately N - S direction.

233

234

The first layer has an **increase** high resistivity values ranging from 211 – 745Ωm designated with red and purple colour. This formation occurs at a depth of 9.94m along a lateral distances 12.5m-137.5m could possibly be accumulated of bitumen. It has a thickness ranging from 0-9.94m. Evidently, the lateral profile length having a sharp increase of resistivity (478 – 745Ωm) could now indicate possible accumulation of bitumen.

235

236

237

238

239

240

241

242

243

244


245

246

The second geo-electric layer designated with brown, yellow and green colour has undulating along lateral distance 47m-67m, 78m-62m and 105m-115m. It has resistivity values between 18.1- 211Ωm could probably consist of sandy soil. This formation has a thickness varying from 8.35m-17.3m. The third geo-electric layer designated with light blue and deep blue colour extends to a depth from 13.4m-17.3m along a lateral distances 34m-53m having a low resistivity from 1 – 8.2Ωm. It has a thickness of about 3.9m which could possibly host a large volume of underground water resources.

247 Traverse 4 and 5 having correlation of the same depth of 13.4m that could possibly be
248 accumulated of bitumen.

249

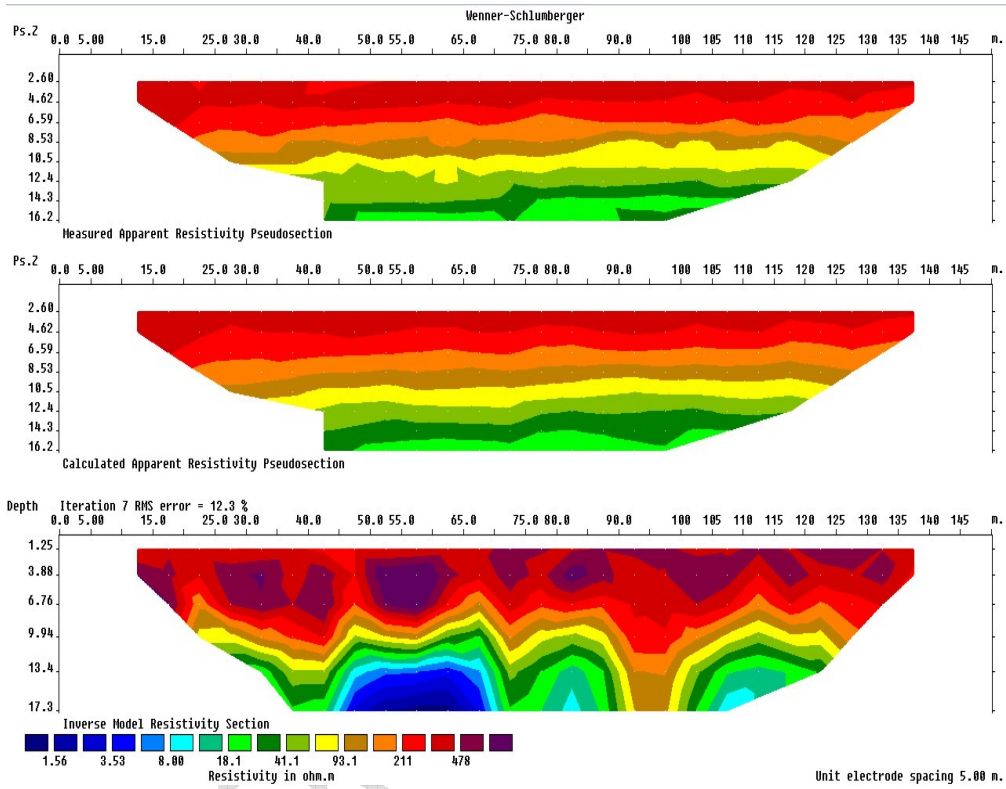


250

251

252

Figure 8: Inverted 2D-Resistivity Section along Traverse Five5.

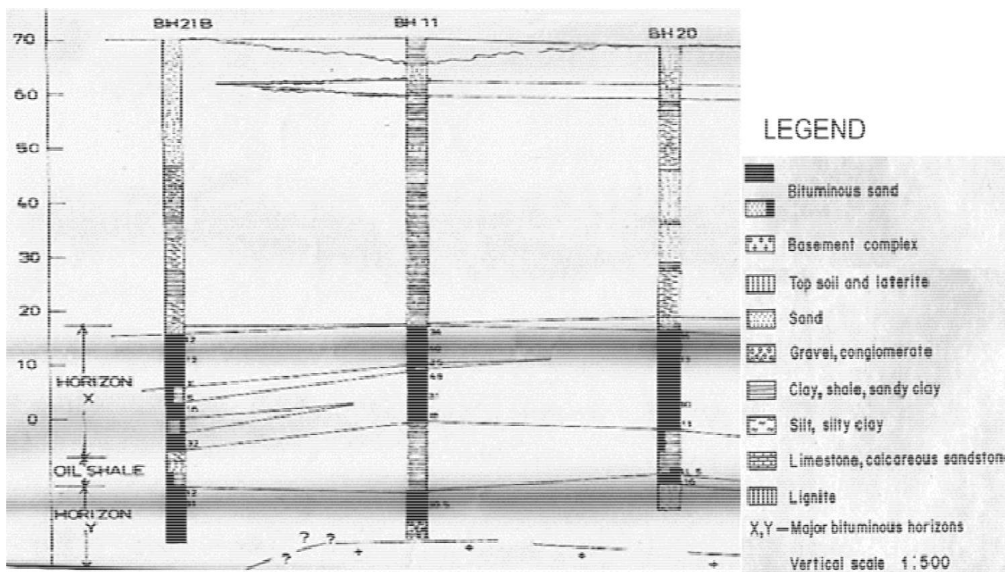

253

254 **Figure 9:** Lithofacies/Bitumen-bitumen Saturation-saturation Correlation-correlation Panel-panel
 255 of the Study-study Area-area.

256 (Modified after GCU, Uni. of Ile-Ife, 1980) [4]. **Figure 9 should come after Figure 1 or 2 in the**
 257 **geology of the area, i.e., much earlier than where it is currently**

Formatted: Highlight

258

259 5. CONCLUSION

260 This research has shown that the occurrence of bitumen was found between the depth of 13.4m
 261 and 9.93m for Traverses 1,2,3 and Traverses 4,5 respectively corroborated by boreholes with a
 262 depth of about 18m. The results of this research indicated that the bitumen is characterized by
 263 good lateral continuity and sufficiently thick for commercial exploitation (i.e., average thickness
 264 of 11.67 m). Bitumen and tar bearing sands formation ~~are known to be~~
 265 ~~identified~~ characterized by their high ~~resistivity~~ resistivity values [3]. Low resistivity values ~~are~~
 266 ~~were~~ encountered in places where the bitumen is thought to be associated with saline
 267 ~~water~~ identified as saline aquifers with variable bitumen presence [5].

268

269 REFERENCES

- 270 1. Adegoke, O.S., and Omatsola, M.E., (1981). "Tectonic Evolution and Cretaceous
 271 Stratigraphy of the Dahomey Basin". J. Min. Geol. 18 (1): 130-137.
 272 2. Agagu, O.K., (1985). A geological guide to Bituminous Sediments in South-Western
 273 Nigeria: Unpublished Report, Department of Geology, University of Ibadan.
 274 3. Eke, E., (2005). Geoelectric Delineation of near-surface Tar sand Deposit in Agbabu,
 275 Ondo State, Southwestern Nigeria Unpublished M. Tech; Thesis, Federal University of

- 276 Technology, Akure. 88pp.
- 277 4. Geological Consultancy Unit, University of Ile – Ife (1980). Geotechnical Investigation
- 278 of the Ondo State Bituminous Sands. Vol. 1, Folio 15. Unpublished Gwynn, J. W, and
- 279 Hanson, F. V., 2009. Annotated Bibliography of Utah Tar Sand Deposits, Open-file
- 280 Report 503Utah Geological Survey p. 1 – 4.
- 281 5. Halliburton, A.D., (2001). Basic Petroleum Geology and Analysis. Halliburton Company,
- 282 SOP.
- 283 6. Jones, H.A., and Hockey, R.D., (1964). “The Geology of Part of South-western Nigeria”.
- 284 Geol. Surv. Nigeria Bull. 31: 87.
- 285 7. Loke, M.H., (2004): Tutorial 2D and 3D Electrical Imaging Surveys. Available at
- 286 www.geoelectrical.com, 28pp.
- 287 8. Loke, M.H., and Barker, R.D., (1995). Least-Squares Deconvolution of Apparent
- 288 Resistivity Pseudosections. Geophysics, 60, p 1682-1690.
- 289 9. Obiora, D.N., Ossai, M.N., Okwoli, E., (2015). A case study of aeromagnetic data
- 290 interpretation. International Journal of Physical Sciences 10(17), 503-519.
- 291 10. Pazdirek, O. and Blaha, V., (1996). Examples of resistivity imaging using ME-
- 292 100 resistivity field acquisitions system. EAGE 58th Conference and Technical Exhibition
- 293 Extended Abstracts, Amsterdam.

294

295

296

297