

Original Research Article

Concordance of agricultural management zones in function of the amount of information used to delimitate them

Comment [M1]: as a function

Comment [M2]: Improve on the title

ABSTRACT

Management zones can be delimited using fuzzy logic, a technique that assigns values of degrees of pertinence to each pixel of a map. When the value tends to 1, these degrees indicate that there is certainty that the pixel belongs to a certain class of the management zone. However, in the boundary region between classes, degrees of pertinence do not tend to 1, indicating that there is confusion about which class such pixels belong. Depending on the area occupied by confused pixels, the use of management zones as a precision agriculture technique can be compromised. Thus, the behavior of the area occupied by pixels with different degrees of pertinence was evaluated as a function of the amount of information used to generate the management zones. Those zones were generated based on altitude, soil apparent electrical conductivity in soil depths of 0.20 m and 0.40 m, soil water content and clay content. When adding information to generate the management zones, there was an increase in the area occupied by pixels with degrees of pertinence lower than 0.5. However, the insertion of more than one layer of information to delineate the management zones improved the concordance between the management zones and the maps of the soil attributes. We suggest that some samples should be distributed in the border regions between the management zones, when these are delimited from the use of two or more variables.

Keywords: Precision agriculture; fuzzy logic; degrees of pertinence.

1. INTRODUCTION

Soil properties are susceptible to temporal and spatial variation due to intensive agricultural activities. As a result, it is of utmost importance a continuous follow-up of the soil physical and chemical properties throughout the area [1]. Within this context, precision agriculture proposes a re-organization of the traditional agricultural management system by considering the spatial variability inside the area, towards a low-input, high-efficiency, and sustainable agriculture [2, 3].

In order to obtain crop productivity data, expressed by maps, it is necessary to perform data collection. The more data collected, the more consistent is the information generated and the diagnosis regarding the variability in the crop [3]. However, depending on the area extension and the desired sample density, the sampling cost may be a limiting factor. Therefore, the generation of management zones appears as one of the solutions to this impasse [4].

To delimit management zones, several variables can be used to generate maps. Some of these variables are: soil apparent electrical conductivity [5, 6, 7, 8], productivity maps [9, 10], soil granulometry [11], soil water content [12] and images obtained by aerial platforms [13]. As a typical geographic information system, the base information for mapping the zones is associated with Cartesian coordinates, which allow the mapping of the area. Classification algorithms analyze these information and divide the data into distinct zones. Fuzzy logic is commonly used for this purpose.

29
30 Unlike the conventional logic and the classical set theory, the fuzzy logic assigns values of
31 degree of pertinence to each classified pixel. These values can range from zero to one and
32 mean, respectively, that an element does not belong to a particular set and that an element
33 belongs completely to the classified set. Values between zero and one represent partial
34 degrees of pertinence.

35
36 In the agricultural sector, there are several studies that use fuzzy logic to map crop productivity.
37 The authors [14] use the fuzzy logic to map the fertility of a humic Yellow Red Oxisol cultivated
38 with arabica coffee variety, based on the sum of bases, cation exchange capacity and base
39 saturation, considering the spatial variability. The authors [15] applied a GIS-based integration
40 model, using fuzzy logic as a function of three variables: soil electrical capacity, nitrogen
41 adequacy index and elevation, resulting in a nitrogen requirement map. The authors [16]
42 analyze the fertility of an experimental area, based on soil chemical attributes and its relation
43 with conilon coffee productivity, using geostatistics and the fuzzy classification system.

44
45 It is likely that in the border region between the management zones, the classified pixels
46 present partial degrees of pertinence, which may indicate the existence of confusion about
47 which class these pixels belong to. Depending on the range of the area occupied by the pixels,
48 with confused classification, the use of management zones as a precision agriculture technique
49 may be compromised. Thus, the present study evaluated the behavior of the area occupied by
50 pixels with different degrees of pertinence, as a function of the information used to generate the
51 management zones.

52 **2. MATERIAL AND METHODS**

53 **2.1. Experimental Site**

54 Soil samples were collected in an area with 20.2 ha of coffee cultivation (*Coffea arabica* L.),
55 where there is predominance of Yellow Red Latosol. The experimental site presents
56 mountainous relief, with average altitude of 915 m, and is located at the coordinates 20° 42' 33"
57 S and 42° 34' 17" W.

58 **2.2. Georeferencing of soil sampling sites**

59 The sampling points in the field were allocated following a systematized distribution, with a grid
60 size of approximately 25 x 25 m, totalizing 275 points. These were georeferenced using the
61 Topographic DGPS (L1), Trimble brand and Pro XT model. The differential correction was made
62 using the Brazilian Institute of Geography and Statistics (IBGE) database. The coordinate
63 system used was the UTM, with Datum South America 1969 and zone 23S.

64 **2.3. Determination of soil attributes**

65 The soil apparent electrical conductivity (ECa) was determined using a portable sensor
66 manufactured by Landviser®, model LandMapper® ERM-02 whose measurement occurs by the
67 principle of electrical resistivity. The ECa measurement occurred in the soil depth from 0 to 0.20
68 m and from 0 to 0.40 m. Granulometric composition analyses were carried out based on the
69 methodology of the author [17, 18]. Soil water content was determined using a real-time sensor
70 manufactured by Spectrum Technologies, FielScout TDR 300 model, in the same spots where
71 the ECa were measured and soil samples, for determination granulometric composition
72 analyses, were taken. In a radius of 1 meter around each of the 275 georeferenced points, soil
73 samples were collected. Each sample was composed of two simple subsamples in soil depth
74 from 0 to 0.20 m. For this, a dutch-type auger was used. The soil samples were analyzed in the
75 laboratory, in order to obtain the contents of pH, phosphorus (P), potassium (K), calcium (Ca²⁺)
76 and magnesium (Mg²⁺).
77

78 The available phosphorus and potassium contents were determined by the Mehlich-1 extractor
79 [19]. The exchangeable contents of calcium and magnesium were determined by the KCl
80 extractor (1 mol L⁻¹). The pH content in water was determined using a ratio of 1:2.5 (parts of
81 suspended soil : parts of water) by using a potentiometer with combined electrode.

82 2.4. Analysis for outliers detection in the database

83 The database was submitted to a previous analysis, in order to detect possible outliers. The
84 sample, which had an absolute value of more than three times the value of the standard
85 deviation, or less than the standard deviation three times the standard deviation [20], or if the
86 neighboring samples had very different values, this would be considered as an outlier and,
87 consequently, excluded from the database for further analysis.
88

89 2.5. Determination of spatial variability of the soil attributes

90 The collected data were submitted to geostatistical analysis for spatial variability
91 characterization. The geostatistical analysis procedure was performed using the Optimaze
92 Model feature of the Geostatistical Wizard tool, available in ArcGIS v. 10.3.
93

94 The spatial models chosen in the semivariogram adjustment were those with the lowest root
95 mean square error (RMS) in the cross-validation. With the spatial models fitted, ordinary kriging
96 was used to interpolate the data. Then, maps of the spatial variability of altitude, soil water
97 content, soil apparent electrical conductivity and soil clay content were generated.
98

99 2.6. Delimitation of management zones

100 The management zones were established by the computer program KRIG-ME [21], based on
101 the maps generated by the interpolated data of altitude, soil water content, clay content and soil
102 apparent electrical conductivity in soil depths from 0 to 0.20 m and 0 to 0.40 m. The area was
103 divided into three management zones and the pixels size of the maps were 5 x 5 m. As a result,
104 nine maps were generated containing three management zones each. Table 1 shows the
105 variables used to define the management zones and their respective representations.
106

107 **Table 1. Variables used to define the management zones and their respective**
108 **representations.**

Management Zones	Variables	Representation
1	Soil apparent electrical conductivity in soil depth of 0.20 m	ZM20
2	Soil apparent electrical conductivity in soil depth of 0.40 m	ZM40
3	Soil water content	ZMU
4	Soil apparent electrical conductivity in soil depth of 0.20 m and altitude	ZM20A
5	Soil apparent electrical conductivity in soil depth of 0.20 m and soil water content	ZM20U

6	Soil apparent electrical conductivity in soil depth of 0.20 m and clay content	ZM20Arg
7	Soil apparent electrical conductivity in soil depth of 0.20 m, clay content and altitude	ZM40ArgAlt
8	Soil apparent electrical conductivity in soil depth of 0.20 m, altitude and soil water content	ZM40AltU
9	Soil apparent electrical conductivity in soil depth of 0.20 m, soil water content and clay content	ZM40UArg

109

110 **2.6.1. Analysis of the degrees of pertinence**

111 The degrees of pertinence of each pixel were obtained by the computer program KRIG-ME [21],
 112 as one of the results of map classification in three management zones. As each map was
 113 divided into three management zones (ZM1, ZM2 and ZM3), a map pixel should present three
 114 degrees of pertinence, G1, G2 and G3, referring to its possibility of belonging to ZM1, ZM2 and
 115 ZM3, respectively. The sum of the three degrees of pertinence of a pixel must be equal to one.
 116 Thus, if any of the degrees of pertinence has a value greater than 0.5, it means that the pixel to
 117 be classified in one of the management zones has an absolute majority (> 50%) in relation to
 118 the chance of pertinence to the corresponding zone. In this way, the pixels that presented all
 119 degrees of pertinence lower than 0.5 were considered as confused pixels.

120
 121 After the design of the management zones 1, 2 and 3, the pixels considered confused were
 122 separated from the others. With the combination of the variables altitudes, soil water content,
 123 clay content and soil apparent electrical conductivity, from soil depths of 0 to 0.20 m and 0 to
 124 0.40 m to delimit the management zones, the result of this stage were nine maps containing,
 125 each of them, three management zones and one zone composed by the confused pixels.
 126

127 **2.7. Comparison between the results for each level of information used to** 128 **generate the management zones**

129 The variability of the attributes pH, phosphorus (P), potassium (K), calcium (Ca²⁺) and
 130 magnesium (Mg²⁺) was classified in three management zones using the KRIG-ME software
 131 program [22]. Thus, five additional maps were generated, consisting of three management zones
 132 each. These maps of the areas of management of the attributes pH, phosphorus (P), potassium
 133 (K), calcium (Ca²⁺) and magnesium (Mg²⁺) were used as reference for comparison between the
 134 maps containing the three management zones and the maps containing the zone of confusing
 135 pixels which, in turn, were based on the variables altitude, soil water content, clay content and
 136 soil apparent electrical conductivity in soil depths of 0 to 0.20 m and 0 to 0.40 m.

137
 138 This comparison allowed to estimate the Kappa concordance coefficient (equation 1) based on
 139 the data from the error matrix [22].

140

141

142

143

144

145

146 Where:

147 \hat{K} = Kappa coefficient estimation;

148 x_{ii} = value in line i and column i (diagonal) of the error matrix;

Comment [M3]: check

Comment [M4]: Equation 1 missing

149 $x_{i\oplus}$ = total in line i;
150 $x_{\oplus i}$ = total in column i;
151 n = total number of samples; and
152 c = total number of zones.

153 The difference between two independent Kappa coefficients was tested at a 5% significance
154 level. The calculated Z value (equation 2) that exceeded the tabulated Z value, corresponding to
155 the determined level of significance, reflected the lack of statistical equality between the two
156 Kappa coefficients, differentiating them significantly from each other. If the Kappa coefficients
157 are statistically different, it is concluded that the confused pixels interfere in the result provided
158 by the management zones map. Otherwise, the opposite is true.

Comment [M5]: Equation 2 is missing

160

161

162 Where:
163 Z = Z standardized and normally distributed statistics;
164 \hat{K}_1 e \hat{K}_2 = Kappa coefficients to be compared;
165 $\hat{\sigma}$ = Kappa coefficient variance.

166

167 3. RESULTS AND DISCUSSION


168 3.1. Spatial variability

169 Figures 1 and 2 show the results of the spatial variability characterization of the attributes used
170 in the present work. It can be analyzed in Figure 1 that there is a similarity in the spatial patterns
171 between the attributes ECa20, ECa40 and soil water content. This can be justified by the fact
172 that soil water content has an influence on soil apparent electrical conductivity [23, 24, 25]. Also,
173 it can be analyzed by the comparison between the maps of soil apparent electrical conductivity
174 and the calcium and magnesium attributes, that there is similarities between their spatial
175 distribution patterns, which can be an indication that the ECa is a good parameter for defining
176 management classes for these attributes.

Comment [M6]: Attributes (check)

177
178 In the maps of altitude and clay content variables it is possible to verify the most continuous
179 spatial patterns among all the generated maps. This feature makes those information relevant
180 to the delimitation of the management zones, because the more continuous the delimited
181 zones, the easier it will be to manage the application of inputs at a variable rate.

182

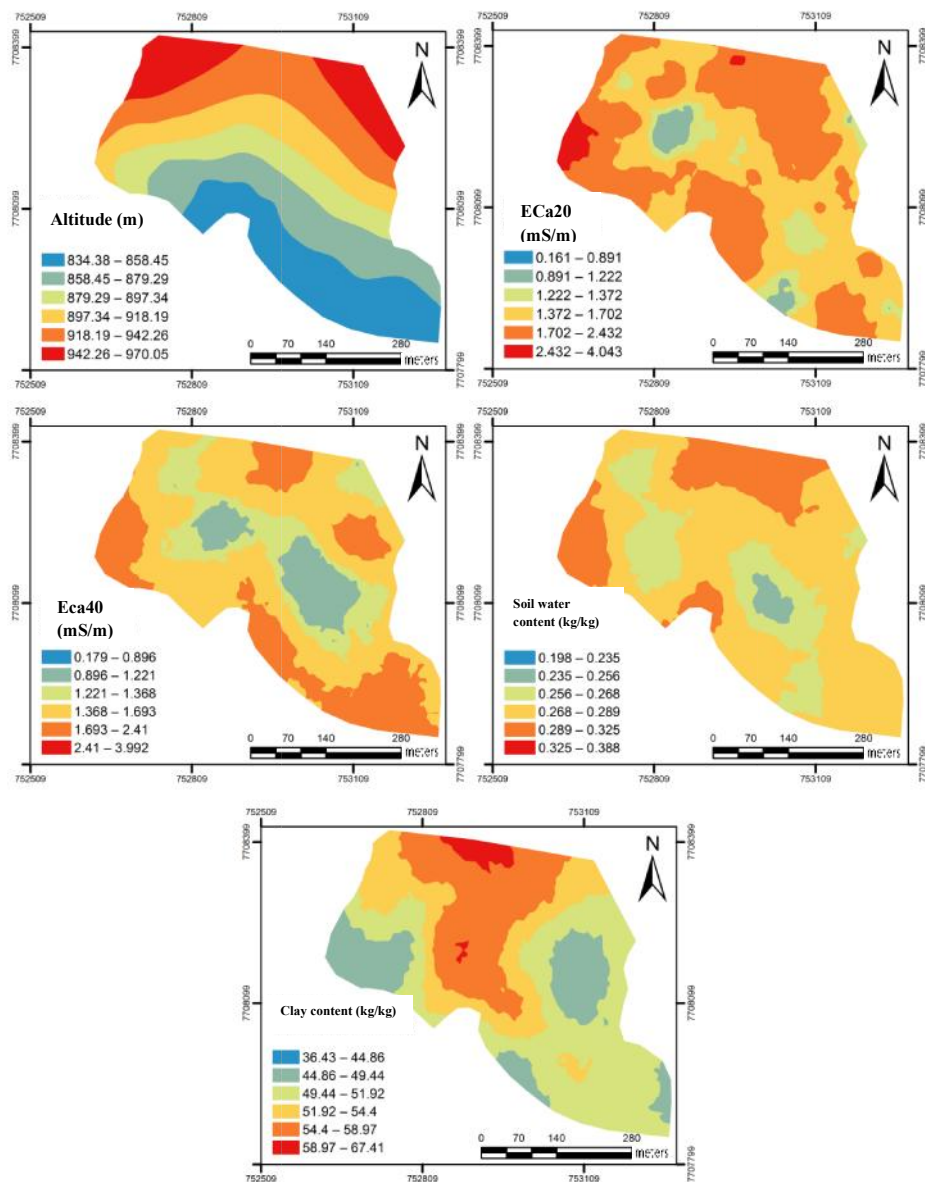


183

184 **Fig. 1. Maps of spatial variability of the attributes used in the management zones**
 185 **delimitation.**

186

187 It can be analyzed in Figure 2 that the use of more than one layer of information in the definition
 188 of management zones can be interesting, if this information contains characteristics of interest,
 189 such as spatial continuity and similarity with the spatial pattern of the attributes of interest, for
 190 soil fertility correction. The authors [26] and [21] indicate that the use of two information for
 191 delimitation of management zones provides better results.

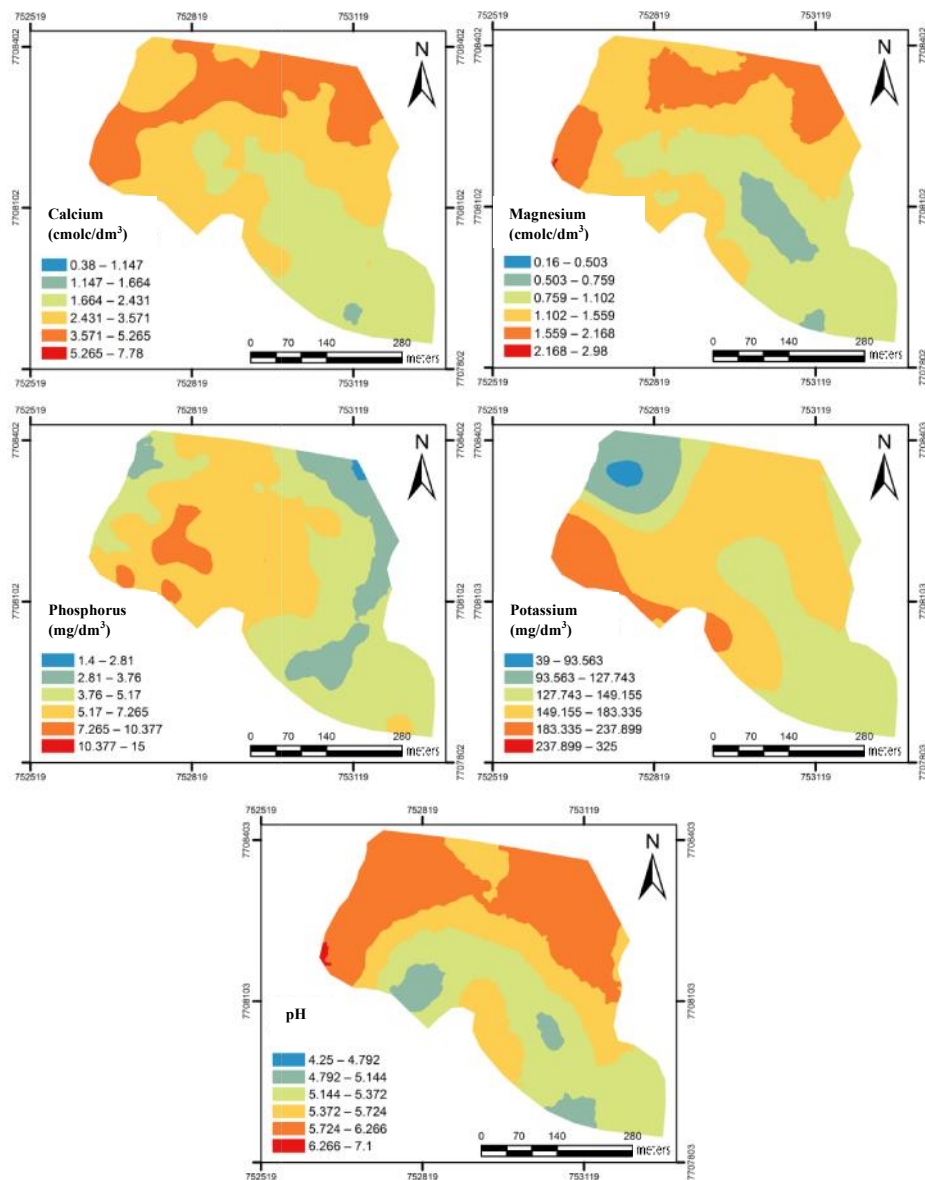

192
193 **Fig. 2. Maps of spatial variability of the soil attributes.**

194
195 **3.2. Comparison of sampling strategies**


196 As the area was classified in three management zones, if the degrees of pertinence (G1, G2
197 and G3) of a given pixel are equal to 0.33, it indicates that this pixel reached the highest
198 possible level of confusion. Among the matrices of pertinence generated after the design of the
199 management zones, only those generated on the basis of two and three variables presented
200 pixels with degrees of pertinence mathematically close to 0.33, as represented in Tables 1 and
201 2.

Comment [M7]: Where is Table 1


202 **Table 2. Highest degrees of pertinence and quantity of pixels per management zone.**
203

Management zone	Representation	Highest degree of pertinence	Number of pixels
1	ZM20	0,47	9
2	ZM40	0,47	6
3	ZMU	0,46	5
4	ZM20A	0,35	5
5	ZM20U	0,39	1
6	ZM20Arg	0,34	4
7	ZM40ArgAlt	0,34	36
8	ZM40AltU	0,34	2
9	ZM40UArg	0,34	3

204
205 As the number of information used to define the management zones increased, the area
206 occupied by confused pixels grew, with degrees of pertinence less than 0.5, as shown in Figure
207 3. The confused pixels may belong to zones different from those that they were initially
208 classified. Thus, the larger the area occupied by these pixels, the greater the possibility of a
209 wrong decision regarding the treatment that this area should receive.
210

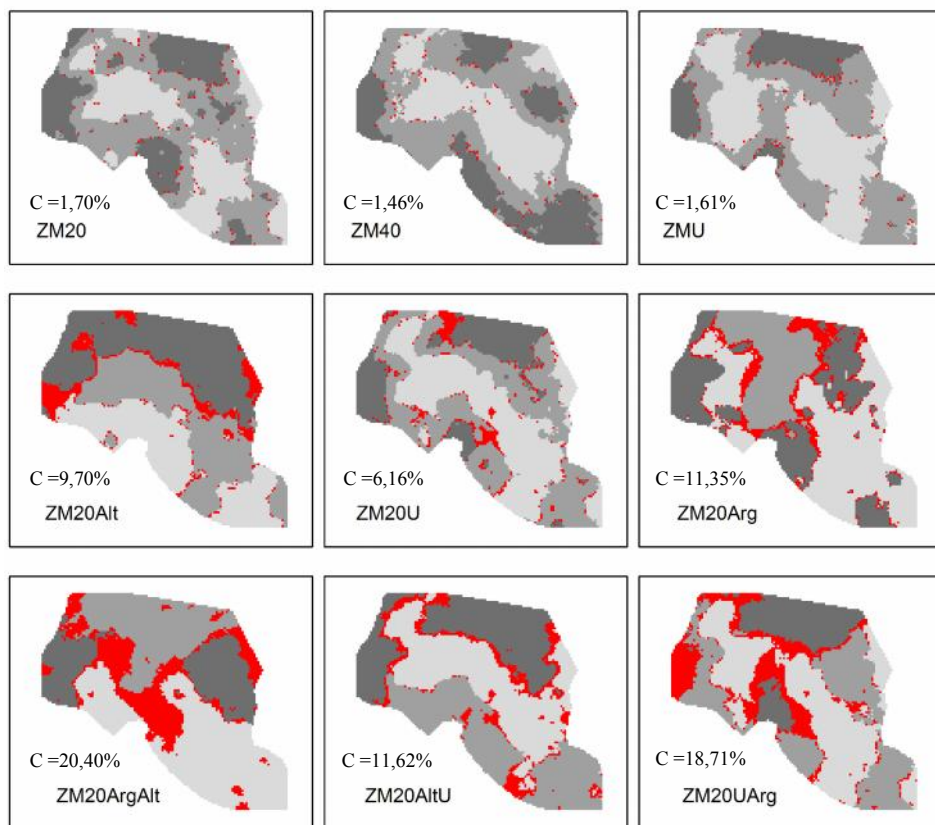

Management Zones



211

212 **Fig. 3. Area occupied by pixels with degrees of pertinence less than 0.5 (C%).**

213

214 An area with uncertain classification may receive a management beyond or below what is
 215 necessary. It may occur that the area requires simpler management (lower cost), but instead it
 216 receives a treatment that will result in waste of the input, or even the area receives a
 217 management that is less than necessary, resulting in ineffective treatment and, consequently, in
 218 a decrease in productivity. In both cases, financial losses occur. Thus, the management zones
 219 generated with more than two variables may be more sensitive to these problems, since the
 220 area occupied by confused pixels may correspond to 20% of the total area (Figure 3).

221

222 In general, the insertion of more than one layer of information to delimit the management zones,
 223 although it increased the area occupied by confused pixels, it also improved the concordance of
 224 the management zones with the maps of the soil attributes (Table 3). Comparing the
 225 concordances of the management zones maps without the distinction of the confused pixels

226 with the concordances of the management zones maps without the confused pixels, it is noticed
 227 that in most cases there was no significant difference between them. This result is specifically
 228 observed in cases where one or two variables were used to delimit the management zones. In
 229 other words, the confused pixels did not interfere in the concordance between the management
 230 zones and the maps of the soil attributes. The exception occurred when the management zones
 231 were delimited using three variables.
 232

233 **Table 3. Kappa coefficient of concordance between management zones and soil**
 234 **attributes maps.**

Variables	Management Zone	Kappa				
		pH	Phosphorus	Potassium	Calcium	Magnesium
1	ZM20	0,20 ^{A**}	0,08 ^A	0,20 ^A	0,26 ^A	0,25 ^A
	ZM20C*	0,20 ^A	0,08 ^A	0,20 ^A	0,25 ^A	0,25 ^A
	ZM40	0,09 ^B	0,11 ^B	0,13 ^B	0,10 ^B	0,13 ^B
	ZM40C*	0,09 ^B	0,11 ^B	0,13 ^B	0,09 ^B	0,13 ^B
	ZMU	0,19 ^A	0,12 ^B	0,08 ^C	0,24 ^A	0,28 ^C
	ZMUC*	0,19 ^A	0,12 ^B	0,07 ^C	0,19 ^C	0,28 ^C
2	ZM20A	0,28 ^C	0,12 ^B	0,27 ^D	0,35 ^D	0,42 ^D
	ZM20AC*	0,19 ^A	0,12 ^B	0,07 ^C	0,24 ^A	0,28 ^C
	ZM20U	0,21 ^D	0,08 ^A	0,19 ^A	0,30 ^E	0,33 ^E
	ZM20UC*	0,20 ^A	0,09 ^A	0,19 ^A	0,29 ^E	0,31 ^E
	ZM20Arg	0,28 ^C	0,20 ^C	0,26 ^D	0,20 ^C	0,22 ^F
	ZM20ArgC*	0,24 ^E	0,19 ^C	0,24 ^E	0,18 ^C	0,21 ^F
3	ZM20AltArg	0,47 ^F	0,09 ^A	0,19 ^A	0,39 ^F	0,37 ^G
	ZM20AltArgC*	0,39 ^G	0,19 ^C	0,17 ^F	0,35 ^D	0,37 ^G
	ZM20AltUmi	0,41 ^G	0,14 ^D	0,14 ^B	0,37 ^D	0,34 ^E
	ZM20AltUmiC*	0,36 ^H	0,13 ^B	0,12 ^B	0,33 ^D	0,31 ^E
	ZM20UArgUmi	0,20 ^A	0,17 ^E	0,14 ^B	0,29 ^E	0,29 ^C
	ZM20UArgUmiC*	0,16 ^I	0,13 ^B	0,12 ^B	0,25 ^A	0,25 ^A

Management zones with area represented by pixels classified as confused; Different letters in the columns indicate statistical difference at a 5% level of significance.

235 In order to practice precision agriculture, these results show that fuzzy logic can be used to
236 delimit management zones. However, when more than one information is used to delimit the
237 zones, and at the moment of the variables sampling after this delimitation, we suggest that
238 some samples should be distributed in the boundary regions between the zones. Thus, it is
239 possible to better analyze which zone a given area belongs to, using information from the
240 attributes to be surveyed in the area.

241 **4. CONCLUSION**

242 Fuzzy logic has proven to be an efficient technique to delimit management zones. Even though
243 there are confused pixels in the classification, the final result is not negatively influenced by the
244 uncertainty of the technique.

245 The use of more than one information for the delimitation of management zones increased the
246 concordance between the defined management zones and the maps of soil attributes.

247 We suggest that some samples should be distributed in the border regions between the
248 management zones, when these are delimited from the use of two or more variables.

249 **COMPETING INTERESTS**

250 Authors have declared that no competing interests exist.

251 **REFERENCES**

- 252 1. Samouëlian A, Cousin I, Tabbagh A, Bruand A, Richard G. Electrical resistivity survey in
253 soil science: A review. *Soil and Tillage Research*. 2005;10.1016/j.still.2004.10.004.
- 254 2. Zhang N, Wang M, Wang N. Precision agriculture—a worldwide overview. *Computers
255 and electronics in agriculture*. 2002;10.1016/S0168-1699(02)00096-0.
- 256 3. Molin JP, Amaral LR, AF Col. Precision agriculture. 1st ed. São Paulo: Texts Workshop.
257 2015. Portuguese.
- 258 4. Rodrigues FAJ, Vieira LB, Queiroz, DM, Santos NT. Generation of management zones
259 for coffee cultivation using SPAD sensor and foliar analysis. *Brazilian Journal of
260 Agricultural and Environmental Engineering*, 2011; 10.1590 / S1415-
261 43662011000800003. Portuguese.
- 262 5. Luchiari AJ, Borghi E, Avanzi JC, Freitas AA, Bortolon L, Bortolon ESO, Inamasu RY.
263 Management areas: theory and practice. *Precision agriculture: a new look*. São Carlos:
264 Embrapa Instrumentation, 2011. Portuguese.
- 265 6. Oliveira FA, Franchini JC, Debiasi, H. Spatial variability of soybean yield and electrical
266 conductivity of a Bruno Oxisol. *Precision agriculture: a new look*. São Carlos: Embrapa
267 Instrumentação Agropecuária, 2011. Portuguese.
- 268 7. Resende AV, Vilela MF. Overall evaluation, results and perspectives of the use of
269 precision agriculture in annual crops. *Precision agriculture: a new look*. São Carlos:
270 Embrapa Instrumentation, 2011. Portuguese.
- 271 8. Vilela MF, Hurtado SMC, Resende AV, Corazza EJ, Marchao RL, Oliveira CM, Goulart
272 AMC. Preliminary mapping of management zones in a corn-soybean production system
273 in the Cerrado. *Precision agriculture: a new look*. São Carlos: Embrapa Instrumentação,
274 2011. English.
- 275 9. Souza ZM, Domingos GPC, Marcelo JC, Luiz HAR, Paulo SGM, Rafael JAM. Analysis
276 of soil attributes and productivity of sugarcane cultivation using geostatistics and
277 decision tree. *Rural Science*. 2010; 0103-8478. Portuguese.
- 278 10. Passos MC, Veridiana ZM, Francisco CBLP, Marcelo VA, Claudinei K, Flávio CD.
279 Productivity of eucalyptus wood correlated with soil attributes aiming at the mapping of
280 specific areas of management. *Rural science*. 2012; 0103-8478. Portuguese.

- 281 11. Souza ZM, Marques JJ, Pereira GT, Barbieri DM. Spatial variability of the texture of a
282 Red Eutrophic Latosol under sugarcane cultivation. *Agricultural engineering*. 2004.
283 Portuguese.
- 284 12. Birth PS, Silva JA, Costa BRS, Bassoi LH. Homogeneous areas of soil attributes for
285 irrigation management in grape orchards. *Brazilian Journal of Soil Science*. 2014;
286 10,1590 / S0100-06832014000400006. Portuguese.
- 287 13. Araújo JC, Vettorazzi CA, Molin JP. Estimation of productivity and determination of
288 management zones, in grain crops, through multispectral aerial videography. *Acta*
289 *Scientiarum. Biological Sciences*. 2005; 1679-9283. Portuguese.
- 290 14. Silva SA, Lima JSS. Fuzzy logic in the mapping of variables indicative of soil fertility.
291 *Idesia (Arica)*. 2009; 10.4067 / S0718-34292009000300007. Portuguese.
- 292 15. Tremblay N, Bouroubi Y, Panneton B, Vigneault P, Guillaume S. Space, time, remote
293 sensing and optimal nitrogen fertilization rates: a fuzzy logic approach. GIS applications
294 in agriculture. Boca Raton: CRC Press. 2011.
- 295 16. Silva SA, Lima JSS, Souza GS, Oliveira RB, Xavier AC. Fuzzy logic in the evaluation of
296 soil fertility and coffee conilon productivity. *Journal of Agronomy*, vol. 41, n. 1, 2010;
297 1806-6690. Portuguese.
- 298 17. Ruiz HA. Physical dispersion of the soil for particle size analysis by slow agitation. In:
299 *Brazilian Soil Science Congress*, 30, 2005a, Recife: UFRPE. Portuguese.
- 300 18. Ruiz H A. Increasing the accuracy of soil particle size analysis by collecting the
301 suspension (silt + clay). *Brazilian Journal of Soil Science*, 2005b; 29: 297-300. English.
- 302 19. Mehlich A. Mehlich-3 soil test extractant: a modification of Mehlich-2 extractant.
303 *Communications in Soil Science & Plant Analysis*. 1984; 10.1080/00103628409367568.
- 304 20. Barnett V, Lewis T. *Outliers in Statistical Data*, 3rd ed. Hoboken: John Wiley & Sons.
305 1994.
- 306 21. Valente DSM, Queiroz DM, Pinto FAC, Santos NT, Santos FL. Definition of
307 management zones in coffee production fields based on apparent soil electrical
308 conductivity. *Scientia Agricola*. 2012; 10.1590/S0103-90162012000300001.
- 309 22. Congalton RG. A review of assessing the accuracy of classifications of remotely sensed
310 data. *Remote sensing of environment*. 1991; 10.1016/0034-4257(91)90048-B.
- 311 23. Stadler A, Rudolph S, Kupisch M, Langensiepen M, Kruk JV. Quantifying the effects of
312 soil variability on crop growth using apparent soil electrical conductivity measurements.
313 *European Journal of Agronomy*. 2015; 10.1016/j.eja.2014.12.004.
- 314 24. Tang,CS.,Wang DY, Zhu C, Zhou QY, Xu SK, Shi B. Characterizing drying-induced
315 clayey soil desiccation cracking process using electrical resistivity method. *Applied Clay*
316 *Science*. 2018; 10.1016/j.clay.2017.11.001.
- 317 25. Kaufhold S, Dohrmann R, Klinkenberg M, Noell U. Electrical conductivity of bentonites.
318 *Applied Clay Science*. 2015;10.1016/j.clay.2015.05.032.
- 319 26. Kitchen NR, Sudduth KA, Myers DB, Drummond ST, Hong SY. Delineating productivity
320 zones on claypan soil fields using apparent soil electrical conductivity. *Computer and*
321 *Electronics in Agriculture*. 2005; 10.1016/j.compag.2004.11.012.

322