

# CHARACTERIZATION OF ENGINEERING PROPERTIES (ELECTRICAL PROPERTIES) OF RUBUS FRUTICOSUS

## ABSTRACT

Some engineering properties of *Rubus Fruticosus* fruits were characterized in order to provide fundamental information about their properties that will aid in designing modern technology for their handling, processing, storage, preservation, quality evaluation, distribution and marketing. The engineering properties studied are electrical properties. The fruits were conditioned to five and three different moisture and three and four different temperature levels, respectively before testing. American Standards for Testing and Materials (ASTM) and American Society of Agricultural and Biological Engineering (ASABE) standard procedures were used to test all the properties considered. Genstat, Mathlab, JMP in SAS, Duncan in SPSS and Microsoft excel statistical packages were used to analyze the generated data and the means were compared using the analysis of variance (ANOVA) at 5% level of probability. Dielectric constant and loss factor of the fruits decreased with increase in frequency (200MHz – 20GHz) and increased with temperature. These information is recommended for design and development of efficient and effective technology for mechanizing *Rubus Fruticosus* products.

Keywords: Conductivity of dielectric, dielectric constant, loss factor, depth of microwave penetration.

## 1. INTRODUCTION

Since man started discovering and cultivating various types of food, there has never been food without work or work for abundant food without machines. The effectiveness of these machines for mechanizing agricultural production depends on adequate knowledge of engineering properties of the products to be mass produced. Mechanization involves replacing human and animal labour with mechanical devices in crop production, processing, storage and distribution. It reduces production cost, ensures timeliness, and optimizes and protects product quality (Adamade and Jackson, 2014)<sup>[1]</sup>

In handling and processing of agricultural products, some fundamental information about their characteristics is essentially needed. These information can be obtained through the knowledge of engineering properties of the products which constitutes essential data in designing and developing modern technologies for their production, handling, processing, storage, preservation, quality evaluation, distribution and marketing.

Engineering properties of agricultural product are profitably used for mechanizing their planting, harvesting, drying, processing and storage. It improves working efficiency of processing equipment, reduces losses and waste of constructional materials and, saves time and money. It also helps to maintain quality even in adverse storage and handling conditions and offer ways in which products can be utilized effectively. In recent time, strong growing interest on tree crop for food, money and medicine has been ongoing. This is because there is high demand of food due to effects of development and increasing population, besides, many economic tree crops are fading away without being harnessed and replaced.

Tree crops are those perennial woody plants with a single elongated stem of about 3 m high and above (Orwa *et al.*, 2009)<sup>[2]</sup> and, have head of branches and foliage on which fruits grow.

44 The fruits of tree crops are of great interest to food scientists, food producers and other  
 45 scientists who work towards achieving food security. Modern agriculture has led to handling  
 46 and processing of agricultural products into more useful product through various unit  
 47 operations like cleaning, grading, sorting, drying, dehydration, storage, milling and  
 48 transportation. *Rubus Fruticosus* fruit is an edible fruit from *Rubus Fruticosus* tree. It is eaten  
 49 boiled or fresh for its nutritional and medicinal values.

50 Nigeria is blessed with a lot of economic tree crops that are rich in food and medicinal  
 51 values. Development and high quest for foreign food have led to the abandonment of these  
 52 crops as a result, they are gradually fading away, attracting effect of desertification to our  
 53 environment.

54 The agro-industries are dying down due to over dependent on root, tubers, vegetables and  
 55 grains for raw materials. These products have a lot of competition which increases their price;  
 56 hence the industries find it difficult to cope due to little or no profit margin. *Rubus Fruticosus*  
 57 fruits are protenious and contain edible oil which waste away in the farm annually and when  
 58 harvested, a lot of losses are encountered due to low patronage. Processing of this important  
 59 fruit is still by conventional method which encourages losses of both oil and kernel, is  
 60 unhygienic and subjects the fruits to vagaries of heat treatment which results in poor quality  
 61 oil. Olawale (2012)<sup>[3]</sup> reported that the extraction of oils from elemi pulp and kernel are not  
 62 being carried out at commercial level at present, despite ready availability of the fruit in large  
 63 quantity in Nigeria and elsewhere in Sub-Sahara Africa. This situation would improve if data  
 64 needed for the design and operation of the oils' extraction plants are available. *Rubus*  
 65 *Fruticosus* nuts which house the kernel are usually thrown away after eaten the mesocarp,  
 66 causing environmental pollution and loss of biomass resources for alternative energy  
 67 generation. These are as a result of limited knowledge of engineering characteristics of this  
 68 important fruit and nuts that will promote mechanization of its processing into other useful  
 69 products.

70 Oni (2011)<sup>[4]</sup> reported in his inaugural lecture that good number of machines and  
 71 equipment targeted at agro-industries are substandard and break down frequently. This  
 72 problem could be because of wrong choice of construction materials, which could be  
 73 attributed to poor knowledge of engineering characteristics of the targeted agricultural  
 74 product. Besides, the efficiency of most of the imported processing machines are too poor  
 75 because they were produced and calibrated based on the engineering data of agricultural  
 76 products obtained from the manufacturing countries causing maintenance challenges and  
 77 abandonment of these machines.

78 Literature has revealed that several studies have been carried out on engineering properties of  
 79 different agricultural products; chick pea seeds (Konak *et al.*, 2002),<sup>[8]</sup> millet (*Pennisetum*  
 80 *glaucum* L.) (Ndirika and Oyeleke, 2006),<sup>[9]</sup> *Lablabpurpureus* (L) (Simonyan *et al.*, 2009),<sup>[10]</sup>  
 81 *Jatropha curcas* L. fruit, nut and kernel (Sirisomboon *et al.*, (2007),<sup>[11]</sup> *Jathropha curcas* L.  
 82 seed (Kabutey, *et al.*, 2011),<sup>[12]</sup> African yam bean (*Sphenostylis stenocarpa*) (Irtwange and  
 83 Igbeka, 2004),<sup>[13]</sup> water melon (Nelson *et al.*, 2007),<sup>[14]</sup> orange (Hassan, 2002),<sup>[15]</sup> rice  
 84 (Kawamura *et al.*, 2003).<sup>[16]</sup> Despite all these studies, there has not been any published work  
 85 on engineering properties of *Rubus fruticosus* fruits. The objective of this study is to  
 86 investigate the electrical properties of *Rubus fruticosus* fruits.

87 Electrical property involves heating the product due to its own electron losses when placed in  
 88 an electrostatic field. Electrical properties are normally described in terms of dielectric  
 89 property of the product which include dielectric constant ( $\epsilon'$ ) and loss factor ( $\epsilon''$ )

90 The dielectric constant of a material is associated with the energy storage capability in the  
 91 electric field in the material and the loss factor (dissipation factor) has to do with the energy  
 92 dissipation or absorption due to conversion of electric energy to heat energy in the material.

93 The dielectric constant and loss factor are usually influenced by the volume of air void in  
 94 sample, moisture content and temperature, frequency as well as chemical composition of the  
 95 product. In complex permittivity of most

96 materials, dielectric constant ( $\epsilon'$ ) and loss factor ( $\epsilon''$ ) are expressed as real and imaginary part  
 97 of the permittivity ( $\epsilon$ ) as shown in Eq. 1

$$98 \epsilon = \epsilon' - j\epsilon'' \dots\dots\dots (1)$$

99 The loss tangent is given as, Eq. 2:

$$100 \tan \delta = \frac{\epsilon''}{\epsilon'} \dots\dots\dots (2)$$

101

## 102 2. MATERIALS AND METHODS

### 103 2.1 ELECTRICAL PROPERTIES OF THE FRUITS

104 Dielectric properties of *Rubus Fruticosus* fruits were experimented at frequency range of 50  
 105 MHz – 40 GHz using dielectric analyzer (S – Parameter 8722ES). Transmission line  
 106 techniques were used to determine the electrical properties of the product (Vijay et al., 2015).  
 107 Samples of moisture content (5, 15, 30, 45, 60% (wb)) were conditioned to temperatures of  
 108 50 °C, 65 °C and 80 °C using water bath, the moisture content of the fruits were determined  
 109 by oven drying method. Initial moisture content of the fruits were allowed to be uniform by  
 110 placing in a refrigerator at 5 °C for about 18 hours. The moisture content of the fruits were  
 111 determined at average environmental temperature and relative humidity of 38 °C and 77%  
 112 respectively. The fruits samples were weighed using digital balance of 0.01g accuracy before  
 113 putting them in the oven. The oven was set at 105 °C for 8 hours. The difference between the  
 114 initial and final weight of each sample was used to calculate the moisture content of the  
 115 sample as Eq. 3 (Mohsenin 1986).<sup>[20]</sup>

$$116 \% M_{wb} = \frac{W_1 - W_2}{W_1} \times \frac{100}{1} \quad 3$$

117 Where:  $M_{wb}$  = moisture content wet basis (%),  $W_1$  = initial weight (g).  $W_2$  = final weight  
 118 These moisture and temperature levels were chosen considering samples under dried and  
 119 softening conditions. The hot samples were quickly transferred to the probe of the calibrated  
 120 system which measures and displays the fruits dielectric constant and loss factor  
 121 automatically. Loss tangent and depth of penetration were calculated as shown in Eqs 4 and  
 122 5, respectively.

$$123 \tan \delta = \frac{\epsilon''}{\epsilon'} \dots\dots\dots (4)$$

$$124 D_p = \frac{c}{2\pi f \sqrt{2\epsilon' \left[ \sqrt{1 + \left(\frac{\epsilon''}{\epsilon'}\right)^2} - 1 \right]}} \dots\dots\dots (5)$$

125 Where:  $c$  = speed of light ( $3 \times 10^8$  m/s),  $D_p$  = depth of penetration (mm)

126 The experiment was replicated three times for each temperature and moisture content studied.


## 127 3. RESULTS AND DISCUSSION

### 128 3.1 ELECTRICAL PROPERTIES OF *RUBUS FRUTICOSUS* FRUITS

#### 129 3.1.1 Effect of moisture content and frequency on $\epsilon'$ and $\epsilon''$ of the fruits

130 Fig. 1 and 2 showed the dielectric properties of *Rubus Fruticosus* fruits as a function of  
 131 frequency at five different moisture contents. The dielectric constant ( $\epsilon'$ ) and loss factor ( $\epsilon''$ )


132 for both long and short fruits decreased with increase in frequency and increased as moisture  
 133 content rises from 5.00% – 60.00% wet basis. The dielectric constant ( $\epsilon'$ ) for short and long  
 134 fruits increased from 2.06 – 6.79 and 1.12 – 33.68 respectively as moisture content increased  
 135 from 5.00% – 60.00% wet basis. Loss factor ( $\epsilon''$ ) for short and long fruits also increased from  
 136 0.6594 – 5.99 and 1.22 – 14.99, respectively.

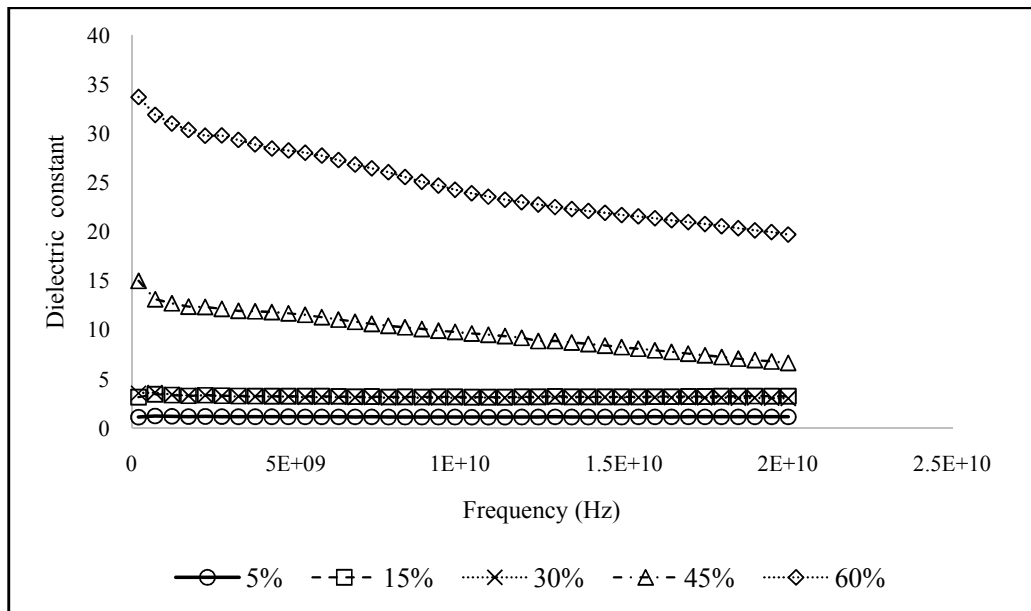

137

138

Fig. 1 a.

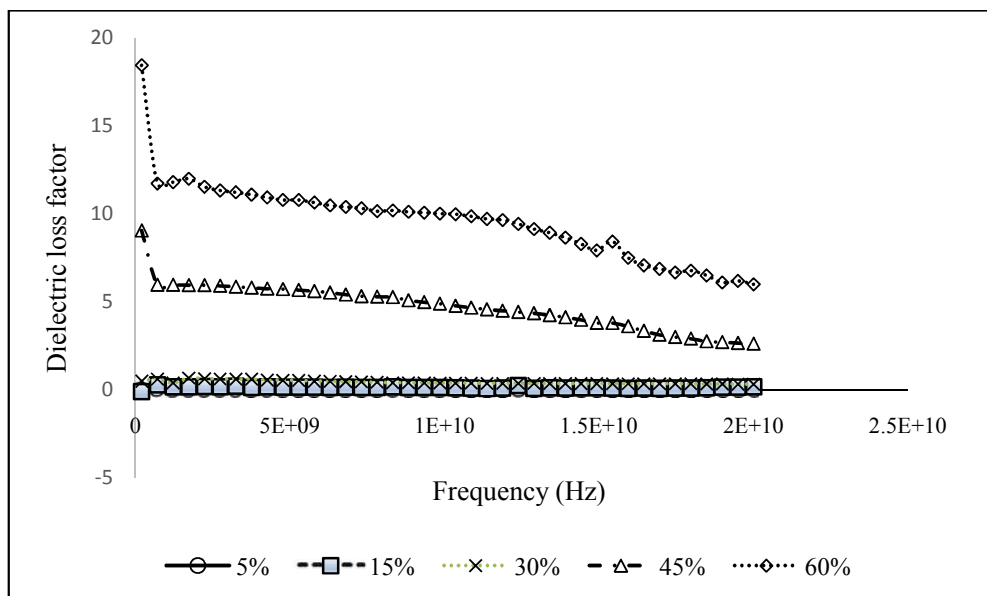


139

140

Fig. 1 b.

141 “Fig. 1. The dependence of Rubus Fruticosus long fruits (a) dielectric constant and (b)  
 142 dielectric loss factor) on frequency at five various moisture content wet basis.”

143

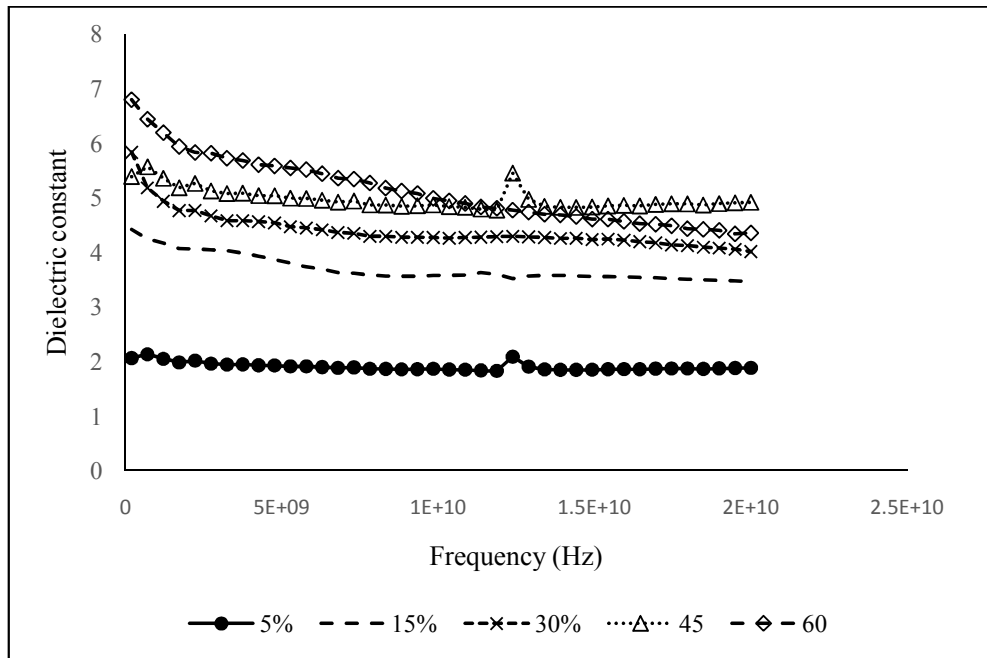


144

145

Fig. 2 a.

146

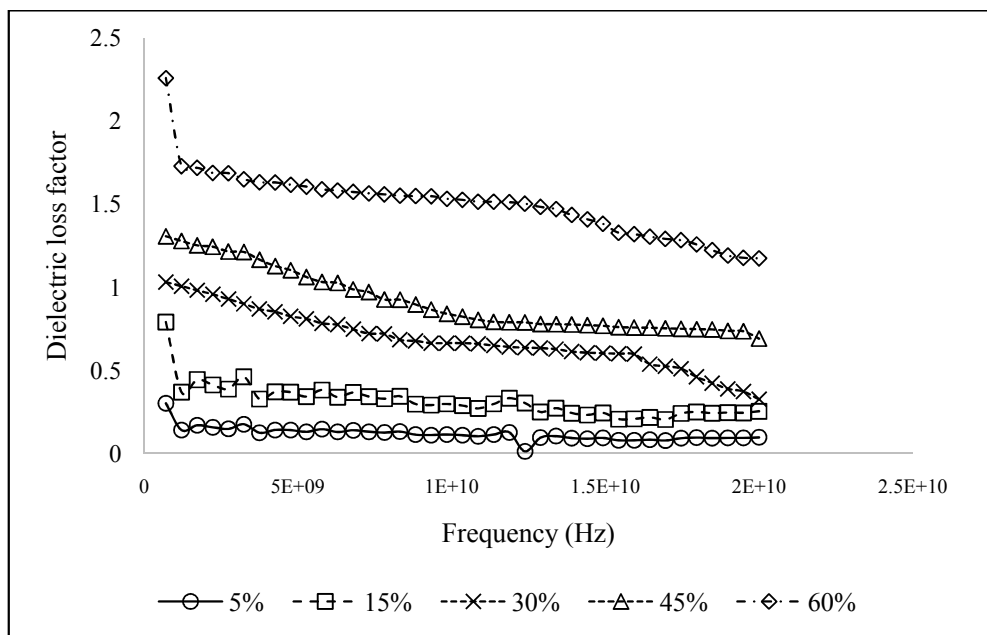

147

148

Fig. 2 b.

149 **“Fig. 2. The dependence of Rubus Fruticosus long fruits (a) dielectric constant and (b)**  
 150 **dielectric loss factor) on frequency at five various moisture content wet basis.”**

151

152 At lower moisture content (5% wet basis),  $\epsilon'$  and  $\epsilon''$  of both fruits are very low throughout the  
 153 frequency range studied except  $\epsilon'$  of short fruit. The reduction in  $\epsilon'$  with moisture content and

154 frequency was reported to be due to low dispersion of water molecules caused by the effects  
 155 of relaxation process and ionic conduction (Feng *et al.*, 2002).<sup>[21]</sup> Long and short fruits had  
 156 the lowest value of  $\epsilon'$  at 10 GHz and 11 GHz under dry condition (5.00% wet basis).  
 157 respectively while under wet condition (60.00% wet basis) both fruits attend the lowest  
 158 values at 20 GHz. Ikediala *et al.*(2000),<sup>[22]</sup> and Feng *et al.*(2002)<sup>[23]</sup> observed similar trend  
 159 with apple fruits at lower moisture content.  
 160 ANOVA at 5% level of significance summarized in Table 1 also revealed that moisture  
 161 content and frequency had high significant effect on  $\epsilon'$  and  $\epsilon''$ .

162

163 **Table 1. ANOVA of dielectric properties of *Rubus Fruticosus* fruits as a function of**  
 164 **moisture content (5, 15, 30, 45, 60% (wb))**

Size	Dielectric property	F- value	P- value	F - critical
Long	$\epsilon'$	1315.51**	5.1E-119	2.43
	$\epsilon''$	654.89**	2.27E-96	2.43
Short	$\epsilon'$	1297.13**	1.5E-118	2.43
	$\epsilon''$	1577.42**	1.3E-122	2.43

165 NB; \*\* means highly significant at 5% level

166 Variation of  $\epsilon'$  with frequency and moisture content was not linear as shown in Table 2. High  
 167 values of  $R^2$  obtained justifies the good fit of non-linear relationship while the equations can  
 168 be used to estimate  $\epsilon'$  of the fruits at any given moisture content.

169 **Table 2. Regression equations of relationship between dielectric properties of *Rubus***  
 170 ***Fruticosus* fruits and moisture content**

Size	Dielectric properties	Regression equation	$R^2$
Long	$\epsilon'$	$2.34 h^2 - 8.61 h + 8.58$	0.96
	$\epsilon''$	$0.97 h^2 - 3.45 h + 2.68$	0.99
Short	$\epsilon'$	$1.31 \ln(h) + 5.95$	0.99
	$\epsilon''$	$2.37 h^{1.0549}$	0.99


171 h = moisture content.

172

173

### 174 3.1.2 Effect of temperature and frequency on $\epsilon'$ and $\epsilon''$ of the fruits

175 The variation of dielectric constant ( $\epsilon'$ ) and dielectric loss factor ( $\epsilon''$ ) with temperature plotted  
 176 at frequency range of 200 MHz to 20 GHz is presented in Figs. 3 and 4

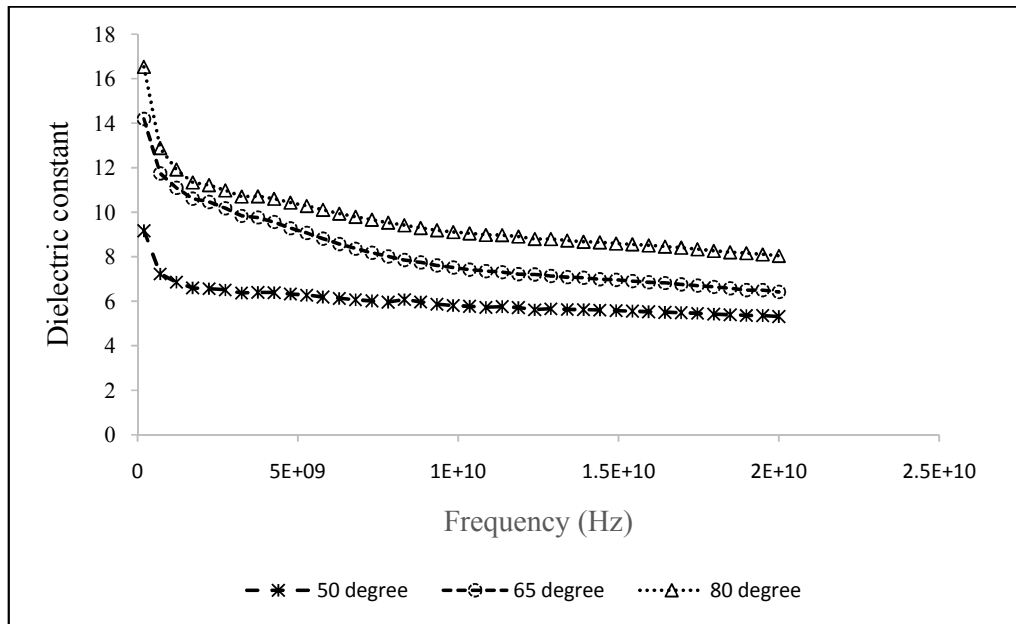


177

178

Fig. 3 a.

179

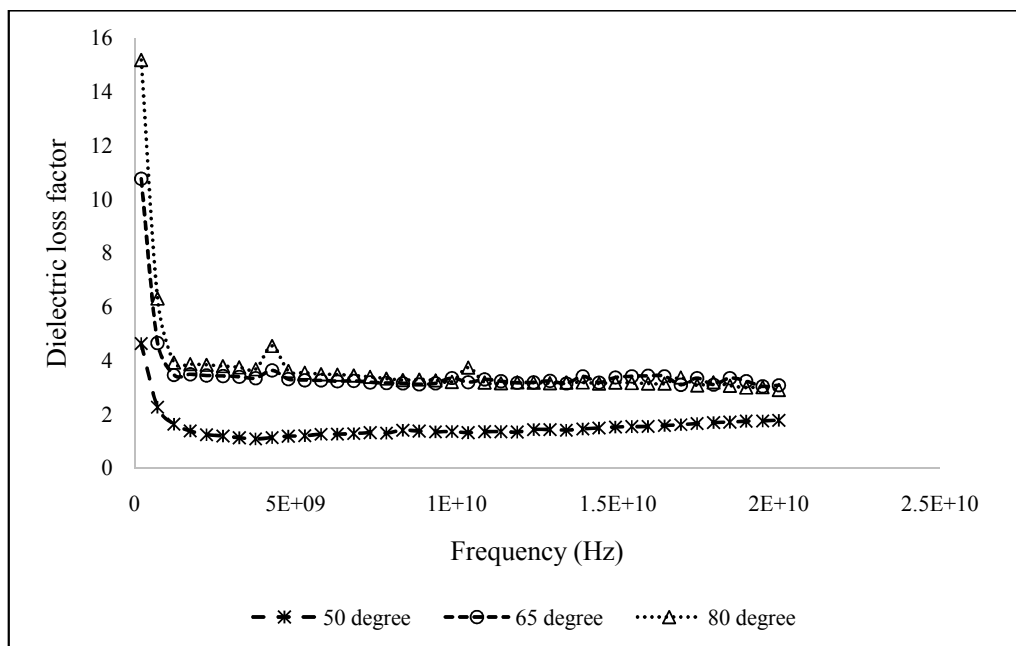

180

181


Fig. 3 b.

182

183

184 **Fig. 3. The dependence of *Rubus Fruticosus Long* fruits (a) dielectric constant and (b)**  
 185 **dielectric loss factor) on temperature**

186

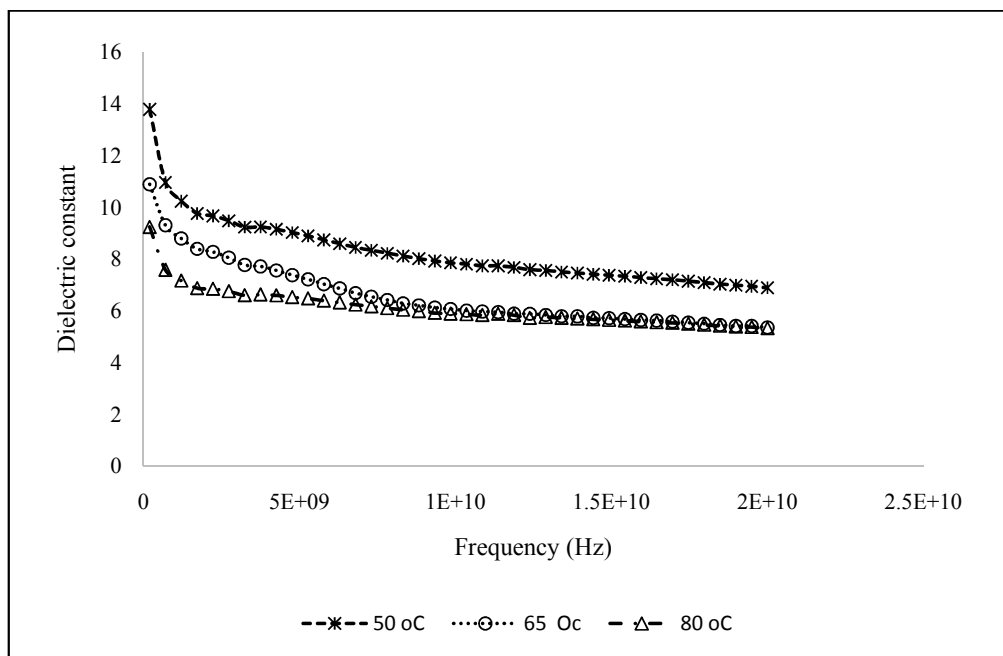


187

188

Fig. 4 a.

189

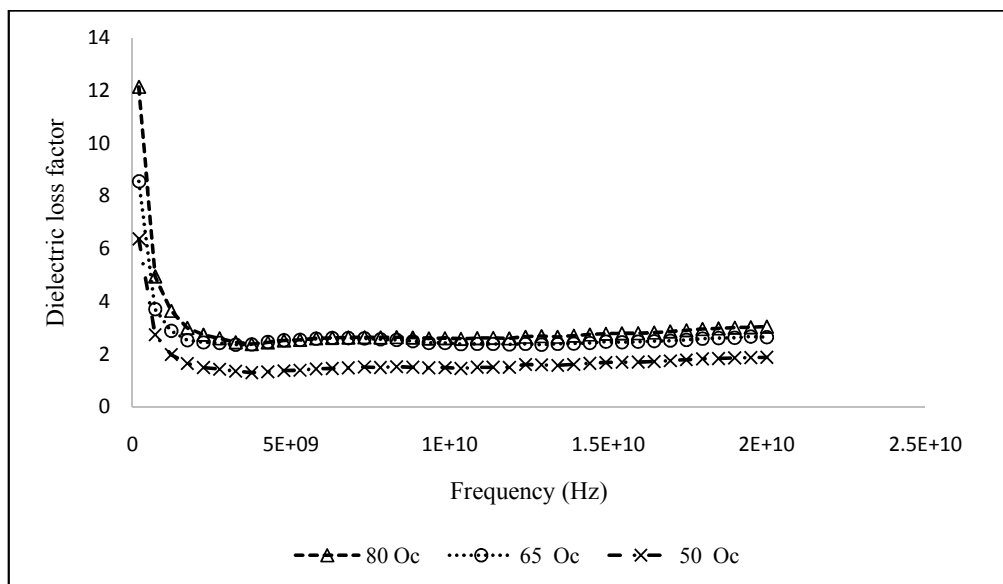

190

191

Fig. 4 b.

192 **Fig. 4.** The dependence of *Rubus Fruticosus* short fruits (a) dielectric constant and (b)  
 193 dielectric loss factor) on temperature.

194 It was observed that the values of  $\epsilon'$  and  $\epsilon''$  are significantly (5%) low for all temperatures  
 195 studied. Dielectric constant ( $\epsilon'$ ) of long fruit decreased with increase in frequency (9.16 –  
 196 5.29, 14.18 – 6.41 and 16.53 – 8.02 at 50 °C, 65 °C and 80 °C, respectively for 200 MHz – 20  
 197 GHz). Short fruit ( $\epsilon'$ ) also decreased with increase in frequency (13.79 – 6.88, 10.88 – 5.36  
 198 and 9.23 – 5.35 at 50 °C, 65 °C and 80 °C respectively for 200 MHz – 20 GHz).



199 Both fruits at all temperatures experienced a sharp decrease in dielectric constant ( $\epsilon'$ ) up to  
 200 2.23 GHz afterwards, reduction becomes gradual. At lower temperature (50 °C), changes in  $\epsilon'$   
 201 of both fruits over frequency range considered are insignificant while significant (5%)  
 202 changes were observed above 50 °C. Besides, dielectric loss factor ( $\epsilon''$ ) also had a very sharp  
 203 decrease up to 1.21GHz and then increased as frequency increased in all the temperatures of  
 204 both fruit sizes.

205 Loss factor ( $\epsilon''$ ) decreased from 5.05 – 4.61, 10.75 – 3.07 and 15.17 – 2.89 at 50 °C, 65 °C  
 206 and 80 °C, respectively and increased with increase in temperature for long fruit and also  
 207 decreased from 12.14 – 3.04, 8.55 – 2.64 and 6.37 – 1.87 at 50 °C, 65 °C and 80 °C  
 208 respectively for short fruits. Low changes in  $\epsilon'$  and  $\epsilon''$  at low temperature could be because  
 209 the dipole molecules are weak at low temperature causing slow movement of the molecules  
 210 and ionic conductivity of the product. Similar observation was reported of apple, wheat, fresh  
 211 fruits and vegetables (Feng *et al.*, 2002). [24] The temperature dependence of  $\epsilon'$  and  $\epsilon''$  are  
 212 highly significant (5%) for both fruits (Table 3).

213 **Table 3. NOVA of dielectric properties of *Rubus Fruticosus* fruits as a function of**  
 214 **temperature.**

Size	Dielectric property	F- value	P- value	F - critical
Long	$\epsilon'$	372.78**	1.2E-40	3.11
	$\epsilon''$	109.85**	2.06E-23	3.11
Short	$\epsilon'$	424.69**	1.17E-42	3.11
	$\epsilon''$	112.29**	1.09E-23	3.11

215 Level of probability = 5%

216 The relationship between  $\epsilon'$  and  $\epsilon''$  with temperature could be established using regression  
 217 functions and equations as shown in Table 4

218 **Table 4. Regression equations of relationship between dielectric properties of *Rubus***  
 219 ***Fruticosus* fruits and temperature.**


Size	Dielectric properties	Regression equation	R <sup>2</sup>
Long	$\epsilon'$	$3.29\ln(T) + 5.96$	0.99
	$\epsilon''$	$2.24 + 0.8205T - 0.3473T^2$	1
Short	$\epsilon'$	$45.12e^{0.1506T}$	0.92
	$\epsilon''$	$2.76 + 0.5673T - 0.303T^2$	1

220 T = temperature

221

222 **3.1.2.1 Dissipation factor of *Rubus Fruticosus* fruits**

223 Dissipation factor changed significantly (5%) as moisture level of the samples increased (Fig.  
224 5).

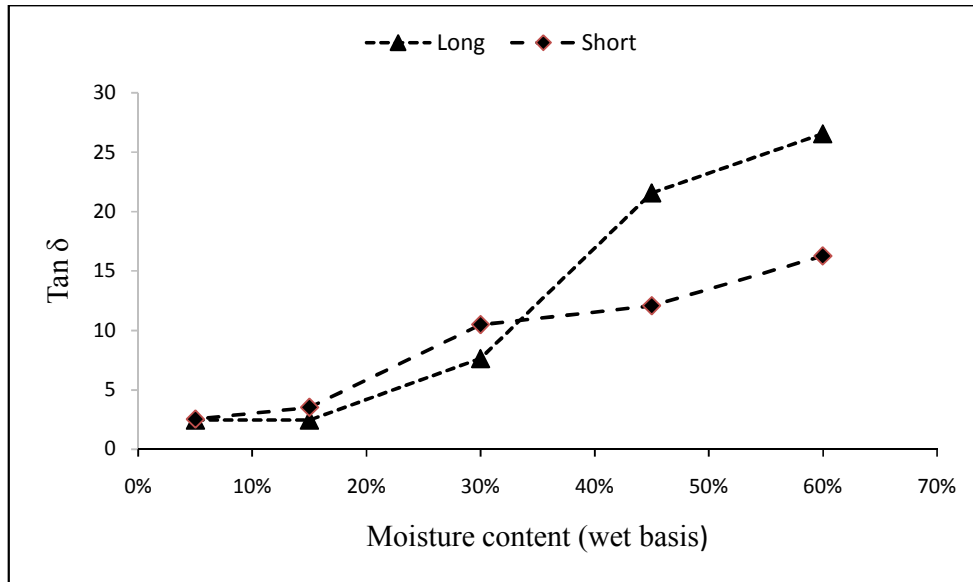


225

226 **Fig. 5. The plot of dissipation factor of *Rubus Fruticosus* fruits against moisture content.**

227 Long and short fruit dissipation factors increased from 3.52 – 26.55 and 3.52 – 16.27  
228 respectively as moisture content increased from 5.00% – 60.00% wet basis and, 13.96 –  
229 23.19 and 15.53 – 22.06 respectively as temperature increases from 50 °C – 80 °C.

230 The relationship of dissipation factor with temperature as shown in Fig. 6 was positive. At  
231 lower moisture content (5.00%), the dissipation factor of both fruits are relatively the same  
232 but from 30% wet basis and above, clear differences were observed. The behaviour of  
233 dissipation factor for both fruits was the same at all temperatures studied. The increase in  
234 dissipation factor with increase in temperature and moisture content confirms dielectric  
235 constant ( $\epsilon'$ ) and dielectric loss ( $\epsilon''$ ) dependence on the mobility of water molecules and ionic  
236 conductivity of the given sample.

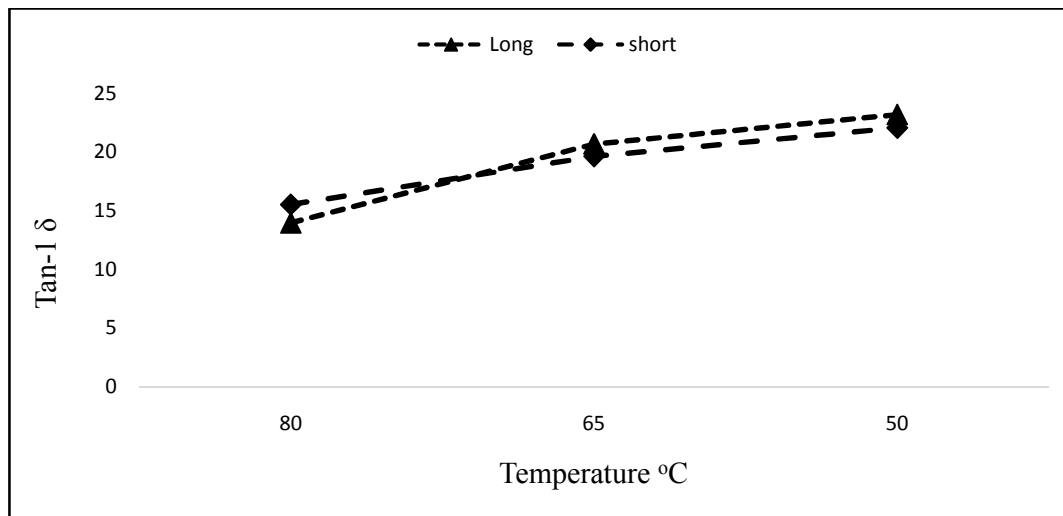

237

238 **Fig. 6. The plot of dissipation factor of *Rubus Fruticosus* fruits against Temperature**

239 This result also showed that the ability of *Rubus Fruticosus* fruits to convert electromagnetic  
 240 energy to heat energy is enhanced at higher temperature and moisture content. Regression  
 241 equation showing the relationship between dissipation factor, temperature and moisture  
 242 content is presented in Table 3.5, with high values of coefficient of determination ( $R^2$ ) which  
 243 indicates good fit.

### 244 3.1.3 Depth of penetration of electromagnetic wave

245 The depth of penetration of electromagnetic waves in *Rubus Fruticosus* fruits decreased  
 246 with increase in moisture content and frequency (Table 5. and, Fig. 7 a and b) for both fruits.  
 247 Penetration depth had no regular behaviour with moisture content until the fruits attained  
 248 30% moisture level, further reduction in moisture content resulted in sharp increase in depth  
 249 of penetration. This is as a result of sharp increase in dielectric constant at lower moisture  
 250 content. At all level of moisture content studied, depth of penetration of both fruits were  
 251 higher than microwave penetration in free space and deionized water at 915 MHz and 2450  
 252 MHz except that of 30% moisture content. This means that higher  
 253 moisture content would not negatively affect electromagnetic wave penetration in *Rubus*  
 254 *Fruticosus* fruits. Similar trend was reported of legume flour by Guo *et al.* (2010) [26] while  
 255 Feng *et al.* (2002) [27] reported negative influence of higher moisture content on  
 256 electromagnetic wave penetration depth of fresh Red Delicious apples.

257 Increase in temperature from 50 °C - 80 °C resulted in corresponding increase in depth of  
 258 penetration as shown in Fig. 8 a and b. This is because the ionic conductivity and mobility  
 259 process is enhanced by higher temperature. This finding negates the report of Tripathi *et al.*  
 260 (2015) [28] for palm shell. These results, suggests that penetration depth of microwave will not  
 261 impose any challenge during microwave heating and drying of *Rubus Fruticosus* fruits  
 262 especially at higher temperature.

263 **Table 5. Regression equations of relationship between dissipation factor *Rubus***  
 264 ***Fruticosus*, moisture content and temperature**

Size	Dielectric properties	Moisture content		Temperature	
		Regression equation	R <sup>2</sup>	Regression equation	R <sup>2</sup>
Long	Tan $\delta$	$3.49 h^2 - 11.17 h + 10.32$	0.97	$3.02 + 13.05T - 2.11T^2$	1
Short	Tan $\delta$	$0.2157 h^2 + 2.11 h + 0.469$	0.94	$15.58T^{0.3216}$	0.99


265 T = temperature ; h = moisture content.  
 266  
 267

268 **Table 6. Depth of electromagnetic wave penetration at constant moisture**  
 269 **content and temperature**

Size	5%		30%		60%		$\lambda_o$		$\lambda_{water}$	
	915 MHz	2450 MHz	915 MHz	2450 MHz	915 MHz	2450 MHz	915 MHz	2450 MHz	915 MHz	2450 MHz
Long	0.748	0.314	0.202	0.097	0.040	0.017	0.327	0.122	0.122	0.016
	1	6	8	2	5	9	7	4	5	8
Short	1.27	1.67	0.992	0.916	0.153	0.160				
t			4	2	1	5				

270 *NB. All the values are in m; ( $\lambda_o$  = penetration depth of microwaves in free space;  $\lambda_{water}$*   
 271 *= penetration depth of microwaves in*  
 272 *deionized water (Feng et al., 2002). [30]*  
 273

274

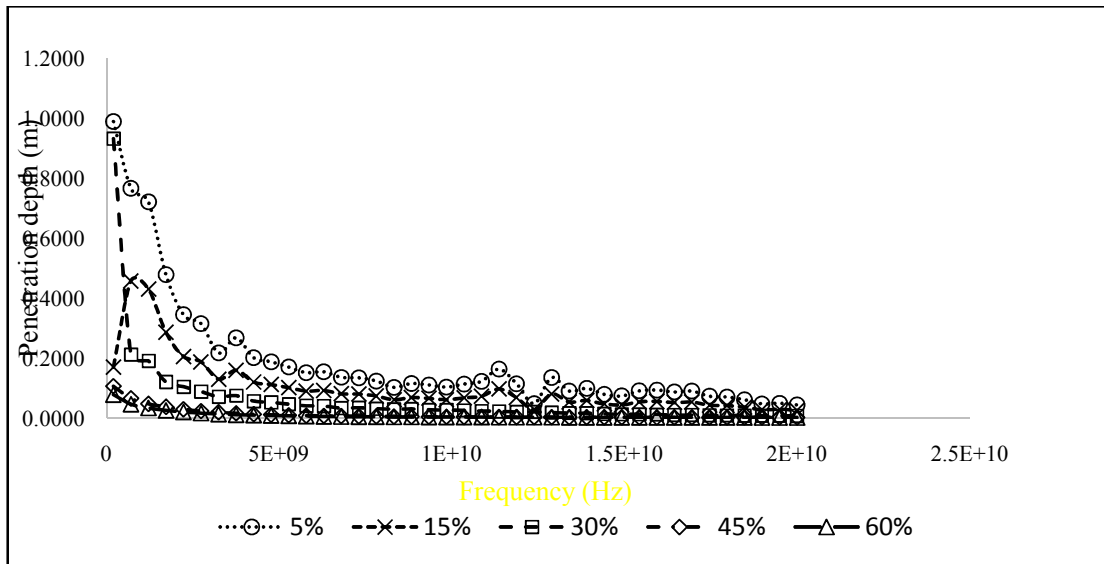


275

276

Fig. 7 a.

277

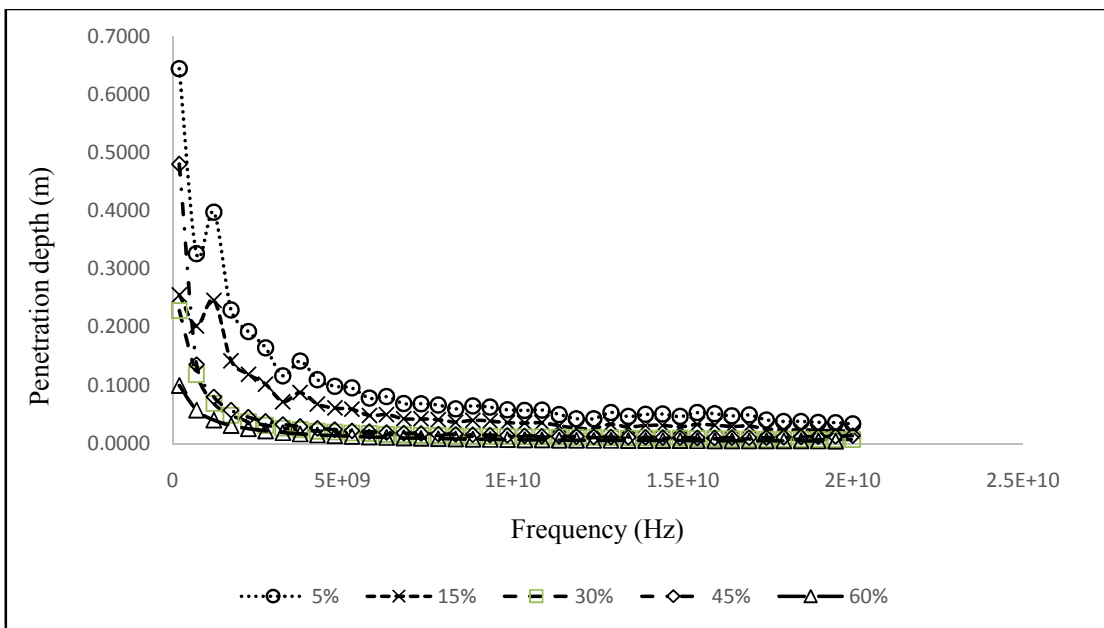


278

279

Fig. 7 b.

280 **Fig. 7. The plot of penetration depth of electromagnetic wave of *Rubus Fruticosus* (a)**  
 281 **Long and (b) short fruits against frequency as affected by moisture content**

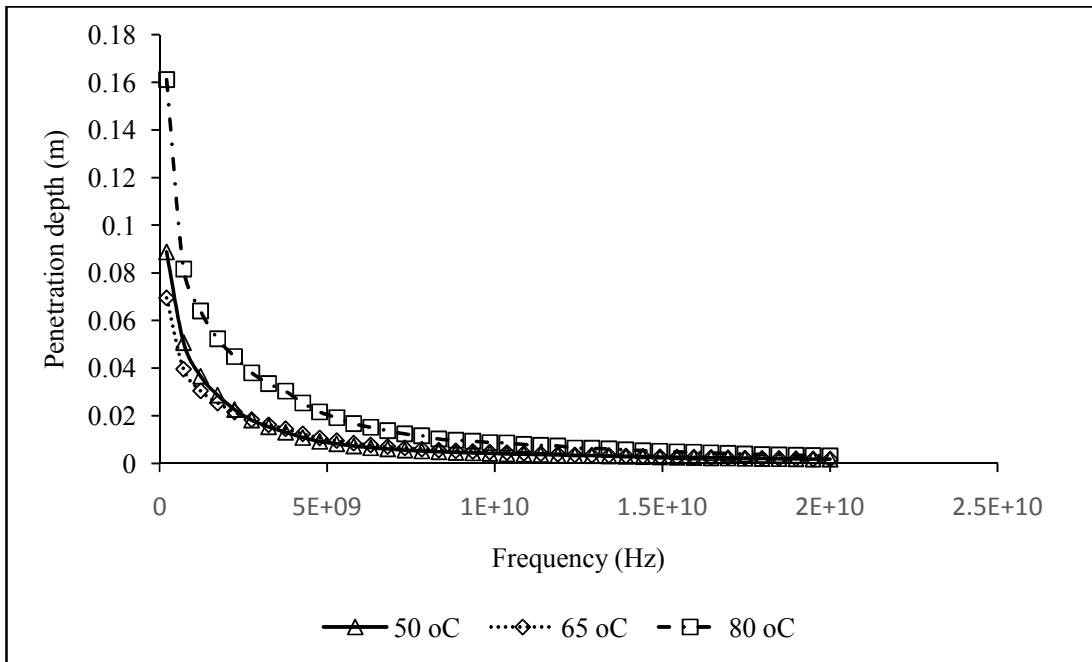


282

283

284

Fig. 8 a.

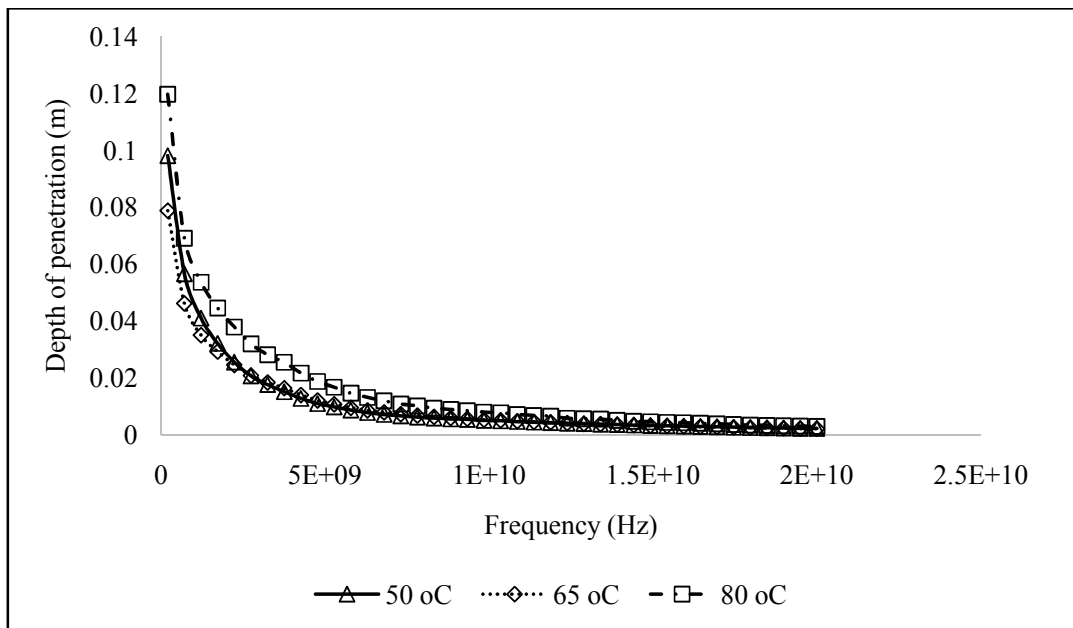

285

286

Fig. 8 b.

287 **Fig. 8.** The plot of penetration depth of electromagnetic wave of *Rubus Fruticosus* (a)  
 288 long and (b) short fruits against frequency as affected by temperature.

289 The relationship between the depth of electromagnetic wave penetration depth, frequency,  
290 moisture content and temperature is given as regression equation in Table 7.

291 **Table 7. Relationship between depth of penetration, moisture content and temperature**

Variety	Regression Equations	R <sup>2</sup>
Long	$DP = 0.0170 + 0.0009 T - 1.47e-11 f - 3.05e-15 Tf$	0.86
Short	$DP = 0.0036 + 0.0002 T - 7.46e-15 f - 1.33e-16 Tf$	0.87
Long	$DP = 0.5851 - 0.0070 h - 7.43e-11 f + 2.44e-12 hf$	0.91
Short	$DP = 0.1132 + 0.0264 h - 3.66e-11 f + 1.02e-12 hf$	0.83

292 DP = depth of penetration; f = frequency, h = moisture content; T = temperature

293 This means that higher moisture content does not reduce electromagnetic wave penetration in  
294 *Rubus Fruticosus* fruits. Feng *et al.* (2002) <sup>[31]</sup> reported negative influence of higher  
295 moisture content on electromagnetic wave penetration depth of fresh Red Delicious apples.  
296 Similar trend was also reported of legume flour by Guo *et al.* (2010). <sup>[32]</sup>

297

#### 298 4. CONCLUSIONS

299 Some engineering properties of *Rubus Fruticosus* fruits were studied and the following  
300 conclusions were made: Temperature and moisture content highly affect both dielectric  
301 constant and loss factor significantly (5%). Dielectric constant and loss factor of the fruits  
302 both long and short fruits decreases with increase in frequency but increases with increase in  
303 moisture content. In all, loss tangent and depth of penetration all decreases with increase in  
304 frequency.

305

#### 306 REFERENCES

- 307 Adamade, C.A. and Jackson, B.A. (2014). Agricultural mechanization: a strategy for  
308 food sufficiency. *Journal of Agricultural Science* 4(3): 152-156.
- 309
- 310 Feng, H., Tang, J., & Cavalieri, R. (2002). Dielectric properties of dehydrated apples as  
311 affected by moisture and temperature. *Transactions of the ASAE*, 45(1): 129–136.
- 312
- 313 Guo, W., Wang, S., Tiwari, G., Johnson, J.A., Tang, J. (2010). Temperature and  
314 moisture dependent dielectric properties of legume flour associated with dielectric  
315 heating. *LWT-Food Sci Technol* 43:193–201.
- 316
- 317 Hassan, H. E. (2002). Study of sorting and grading operations of Egyptian mature  
318 oranges using visible laser. Ph.D. Th., Nat. Inst. of Laser In Enhanced Sc. (NILES),  
319 Cairo U.: 12-15.

320

- 321 Ikediala, J. N., Tang, J. Drake, S. R. and Neven, L. G. (2000). Dielectric properties of  
322 apple cultivars and codling moth larvae. *Trans. ASAE* 43(5): 1175–1184.  
323
- 324 Irtwange, S. V. and Igbeka, J. C. (2004). Thermal conductivity of African yam bean  
325 (*Sphenostlis Stenocarpa*) as affected by bulk density and moisture content. *Journal of*  
326 *Applied Science, Engineering Technology*, 4(2): 1-6.  
327
- 328 Kabukey, A., Herák, D. and Sedláček, A. (2011). Behaviour of different moisture  
329 contents of *Jatropha curcas* L. seeds under compressive loading. *Res. Agri. Eng.* 57(2):  
330 72 – 77.  
331
- 332 Konak, M., Carman, K. and Aydin, C. (2002). Physical properties of chick pea seeds.  
333 *Biosystem Engineering*. 182(1): 73-78.  
334
- 335 Kawamura S., M. Natsuga, K. Takekura, and K. Itoh (2003). Development of an  
336 automatic rice-quality inspection system. *Ag. Process Eng. Lab, Grad. Sch. Ag. Sc.,*  
337 *Hokkaido U., Sapporo 060-8589, Japan. Computers and Electronics in Agriculture* 40:  
338 115- 126  
339
- 340 Nelson S. O, Guo W, Trabelsi S, Kays S. (2007). Dielectric spectroscopy of  
341 watermelons for quality sensing. *Measurements science Technology*; 18: 1887–1892.  
342 15.  
343
- 344 Ndirika, V.I.O. and Oyeleke, O.O. (2006). Determination of some selected physical  
345 properties and their relationship with moisture content for millet (*Pennisetum*  
346 *Glaucum L.*). *Applied Engineering in Agric.* ASABE, vol. 22(2):  
347
- 348 Olawale, A. S. (2012). Solid-liquid extraction of oils of African elemi's (*Rubus Fruticosus*  
349 *schweinfurthii*'s) fruit. *Agri Eng Int: CIGR Journal*, 14 (2): Manuscript No. 2083.  
350
- 351 Oni, K, C. (2011). Man, machine and food insecurity. The ninety-fourth inaugural  
352 lecture, University of Ilorin. Library and Publication Committee, University of Ilorin,  
353 Nigeria. 1-70.  
354
- 355
- 356 Orwa, C., A. Mutua, R. Kindt, R. Jamnadass, and A. Simons. (2009). Agroforestry  
357 Database: a tree reference and selection guide version 4.0.  
358 <http://www.worldagroforestry.org/af/treedb/>  
359
- 360 Simonyan, K. J., Yiljep, Y. D., Oyatoyan, O. B. and Bawa, G. S. (2009). Effect of moisture on  
361 some physical properties of *Lablab purpureus* (L.) sweet seeds. *Agricultural*  
362 *Engineering International: the CIGR Ejournal Manuscript* 1279. Vol. XI.  
363
- 364 Sirisomboon, P., Potncheloeampong, P. and Romphophek, T. (2007). Physical properties  
365 of greensoya bean: Citrus fo sorting. *Journal of Food Engineering*, 79: 18-22.  
366
- 367 Tripathi, M., Sahu, J.N., Ganesan, P., Monash, P. and Dey, T.K. (2015). Effect of  
368 microwave frequency on dielectric properties of oil palmshell (OPS) and OPS char  
369 synthesized by microwave pyrolysis of OPS. *Journal of Analytical and Applied*  
370 *Pyrolysis*, 112: 306–312