

8
9
Influence of Anthropogenic activities on the Physico-chemical Characteristics of open drainage channels in Port Harcourt

10
11
12
13
ABSTRACT

14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
Wastewater and sediment samples from selected locations of the Ntanwogba creek in the metropolitan city of Port Harcourt were collected. Physicochemical parameters were determined using standard analytical procedures. The results of the physicochemical analysis of the wastewater at different locations in this study was reported to have fell short of the recommended limits in terms of the turbidity, BOD₅, nitrate, pH, TDS, temperature, DO, COD and chloride concentrations. The pH of the wastewater effluent samples ranged from 6.4–7.4, while sediments ranged from 5.3–5.7, the temperature regime for the samples at all study sites ranged 26.6-29.5°C. Similarly, TDS and EC levels from wastewater samples ranged from 375–449 mg/l and 501-812.6 µS/cm, respectively. BOD₅ ranges from 33.6 to 201.6 mg/l while chloride concentrations ranged from 34.30-61.06 mg/l. Similar trends were observed for sediments in all stations. The physicochemical characteristics from both sources were statistically significantly different at p < 0.05, and these values were not within the recommended limits for such effluents throughout the sampling period. The conclusion is that wastewater with a high domestic load has the highest negative impact on water quality in a river which suggests that the water resources has lost its potability. This calls for urgent attention for responsible agencies to ensure proper implementation of waste management policies to sanitize our environment. This is because failure to enforce the regulations might pose severe threat to receiving water bodies/resources.

10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
Keywords: Anthropogenic activities, wastewater, sediments, Ntanwogba creek, Physico-chemical characteristics.

10
11
12
13
1. INTRODUCTION

14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
Poor drainage systems in Port Harcourt metropolis has been associated with lack of maintenance or reinforcement of drainage systems which eventually leads to environmental hazards. Sometimes the drains become flooded, make the roads practically impassable for motorists. In many instances, torrential rainfalls literally submerged the cities, halting human and vehicular activities thereby forcing residents to stay indoors as a pre-emptive measure against human disaster. Also, lack of adequate waste collection, disposal and waste management systems cause blockages of drains. Increased population, human activities and inflow materials into the area results in the generation of larger volumes of wastes, coupled with irrepressible location of physical development of infrastructures such as offices, facilities, markets and residential structures which are located and built along natural erosion routes and drainage channels.

Drainages that were constructed **a long time** ago lacked proper maintenance, as debris and waste materials are indiscriminately dumped into the drains thereby inhibiting flow of water into the drains. This indiscriminate attitude occurred majorly by road users who drop waste materials into the drains. Much of these wastes are in solid and liquid forms consisting of domestic organic and inorganic wastes, spent oil or lubricants (crank case oil), agricultural pesticides and fertilizers, water from **flash floods (storm water), runoff** from rain water, running through cracks in the ground and into gutters), water from swimming pools, water from car garages and cleaning centres. Many people also dump their garbage into gutters, streams, lakes, rivers, and seas, thus

30 making water bodies the final resting place of cans, bottles, plastics, and other household products. In areas
31 where drainages and sanitation are poor, such waters run over the ground during rain storms and pick up faeces
32 and contaminates water resources. The widespread use of such wastewater containing toxic substances
33 contaminated by pathogenic microorganisms may likely cause increase in the incidence of wastewater borne
34 disease which is the most common health hazards associated with untreated drinking and recreational waters.
35 Also, their presence in wastewater can result to breakdown of organic solids which may consume much of the
36 dissolved oxygen in the receiving water bodies [1]

37 After each occurrence of flooding and storm, wastes are dumped in ditches and drainage channels. These
38 drainage channels remains unattended for too long and thereby get clogged. This causes blockage of channels
39 for the subsequent runoffs and other contents. Also, as this blockage exists, the road pavement attached to these
40 drains is also under threat. Water builds up on the pavement (flood) thereby causing a wear and tear, with
41 washing of bitumen and other road components into drains thereby causing further damage and leading to drain
42 failures. Sediments constitute varying physicochemical characteristics, in content and type of organic matter,
43 particle size distribution, and pH [2] Contaminated sediment is a significant environmental problem affecting
44 many marine, estuarine and freshwater environments throughout the world and serve as both a reservoir for
45 contaminants and a source of contaminants to the water column and organisms that live there. Sediment
46 contaminants in addition to water column contamination affect bottom-dwelling organisms and other sediment
47 associated organisms, as well as both the organisms that feed on them and humans. Sediments are an integral
48 part of the aquatic environment that provide habitat, feeding, spawning, and rearing areas for many aquatic
49 organisms [3]. Sediment is **an important** compartment in the marine ecosystem. Anthropogenic compounds
50 enter the aquatic environment through various activities in the environment such water **runoff**, erosion, flooding
51 , dumping of wastes into drains which eventually causes blockage and this results to build up of contaminants
52 that eventually defaces the environment. Depending on their physical and chemical properties some substances
53 remain dissolved in the water phase **while** others bind onto particles, sink to the ground and become part of the
54 sediment. In this way, an accumulation of many hydrophobic (and in general strongly adsorbing compounds)
55 takes place. Therefore sediments are assumed to represent a sink for special kinds of pollutants due to re-
56 suspension processes because the compounds can be remobilized again, and act as a source for contaminants
57 within the sediments of ecosystems [1]. Sediment and wastewater quality assessments are useful in determining
58 sediment quality in receiving streams of whole effluents, previously impacted sites, and other contaminated
59 areas. Most contaminants of concern are chemically and biologically reactive and rapidly become associated
60 with particles in freshwater systems. Consequently, uptake or sorption onto particles is the primary mechanism
61 for removing chemically reactive contaminants from the water column, and sedimentation is the principal
62 mechanism for the accumulation of these contaminants in off-site areas over long time periods. Therefore this
63 study was undertaken to determine the physico-chemical characteristics of wastewater and sediments from the
64 open drainage system to evaluate the effect of human activities and its effect on water sources and the
65 environment because of the beehive of socioeconomic activities along the creeks.



74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114

Plate 1: Status of open drainage systems in Port Harcourt metropolis showing indiscriminate dumping of wastes materials causing blockage of drains.

Plate 2. Ntanwogba creek showing discharge of wastewater into the drains



Plate 3: Blockage of water channel with assorted (especially Xenobiotic) waste products associated with anthropogenic activities around the creek in Port Harcourt

2. Materials and Methods

Area of Study

The Ntanwogba Creek is located on the western flank of Port Harcourt city of Rivers State, Nigeria. The stream lies between latitude 4° 50' N and 5° 00' N and longitude 6° 55' E and 7° 00' E. The climate of the area is that of tropical equatorial latitude with rainfall occurring almost all year round [4]. The Ntanwogba creek is a black water stream with its water source running through Orazi forest of Rumueme town across Abacha Road, Cherubim Road, Olu-Obasanjo Road, Okija Road and Afam Street (D/line), and meanders through the densely populated city of Port Harcourt into the Upper Bonny Estuary. Five sampling sites were studied. Sampling was done 500m apart along the stream (Fig 1).

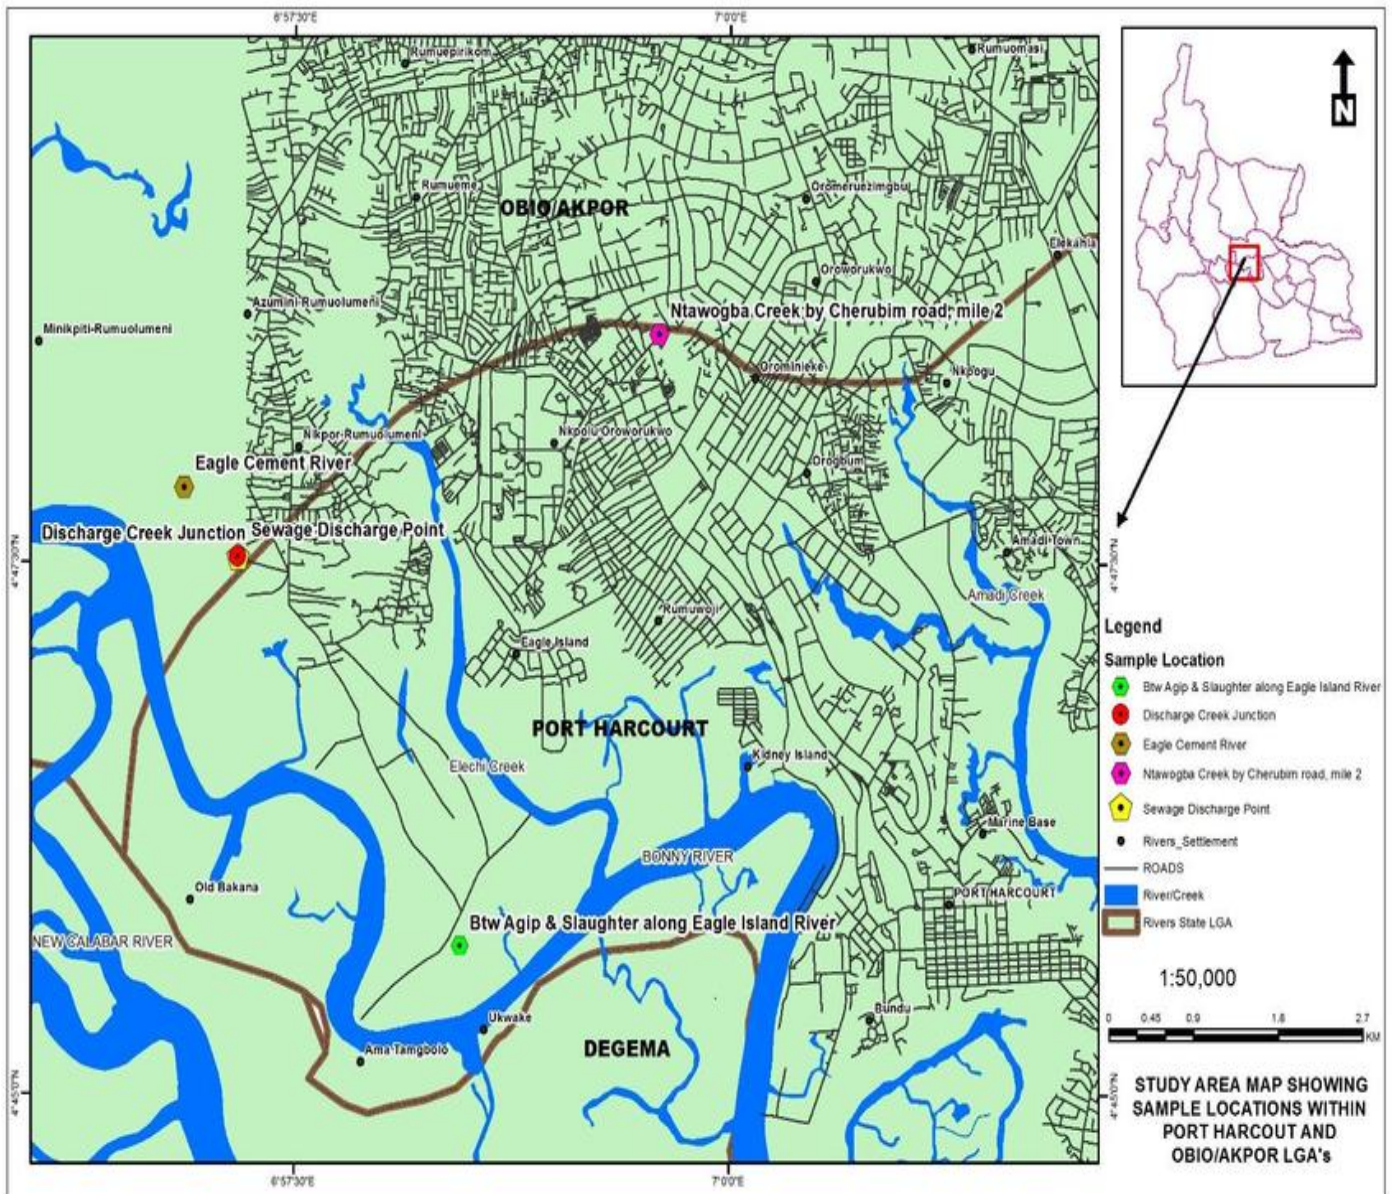


Fig 1. Map of Port Harcourt showing sampling stations along the Ntanwogba creek (Source: Rivers State Ministry of Lands and Survey, Nigeria)

Sediment samples

Sediment samples were collected using a grab sampler. The grab sampler was thoroughly rinsed with wastewater along the same water course to remove any visible sediment before and after use. At each sampling point, the sampler was lowered to the water bed and the topmost layer of the sediment heaved out. The sediment sample was scooped from the grab's cup and transferred into sterile sample container. The sample was labeled and then transported to the laboratory in a cooler packed with ice blocks for analysis.

Waste water Samples

148 Waste water samples were collected using the methods of Adesemoye *et al.*, [5]. Sterile 2.0 litre sample
149 containers were used aseptically to collect the waste water. The samples were collected at five different stations
150 coded P1, P2, P3, P4 and P5 as the wastewater was running along the drainage system. To collect the
151 wastewater, base of the sterilized sample container was held with one hand, plunged about 30 cm below the
152 water surface with the mouth of the sample container positioned in an opposite direction to water flow (7).
153 About 500ml of the sample collected from each station were pooled together to get a composite sample. After
154 collection, the samples were placed in a cooler containing ice blocks and transported immediately to the
155 laboratory for analysis.

156 **Preparation of Samples**

159 The sediment and wastewater samples were processed using the method of [5]. Ten grams of the sediment and
160 10 ml wastewater samples were weighed and added to 90ml of sterile distilled water to get an aliquot. One
161 milliliter of the aliquots, waste water samples were then serially diluted using the ten-fold serial dilution method
162 as described by [6].
163

164 **Analysis of Wastewater samples for Physicochemical characteristics**

165 Samples were analyzed for the following physico-chemical parameters: pH, temperature, turbidity, total
166 suspended solid, total dissolved solid, biochemical oxygen demand (BOD), Chemical Oxygen demand (COD)
167 and conductivity according to methods used by Ristola *et al.*, [2]. The pH value of the samples were determined
168 with a pH meter (Unicam 9450, Orion model No. 91-02). Temperature was measured with mercury
169 thermometer immediately after sample collection. Turbidity was determined with Milton Roy (USA) Spectronic
170 20D meter. Gravimetric method involving filtration and evaporation were used to measure total suspended
171 solids and total dissolved solids. The measurement of BOD and COD were followed using standard methods
172 (7). Wastewater sample was drawn into a 250 ml bottle, incubated in the dark for five days at 20⁰C and at the
173 end of five days, the final dissolved oxygen (DO) content was determined. Decrease in DO between the final
174 DO reading and the initial DO reading was corrected for sample dilution and recorded as the BOD of the
175 sample. The COD was estimated by determining equivalent amount of oxygen required to oxidize organic
176 matter in the samples. Conductivity was determined using a conductivity meter (Metrohm 640, Switzerland).

177 Statistical analysis was carried out on the data obtained during the study using a computer based program SPSS
178 version 20 for Analysis of Variance (ANOVA) across the five sampling stations.

181 RESULTS

182 Physicochemical characteristics

183 The results of the physicochemical characteristics of the various sampling points are shown in Tables 1 and 2
184 for wastewater and sediment samples respectively. For the wastewater samples, the pH of the effluent samples
185 ranged 6.4–7.4, while it ranged from 5.3–5.7 for sediments. The pH values from both sources were statistically
186 significantly different at $p < 0.05$, and these values were not within the recommended limits for such effluents
187 throughout the sampling period. The values recorded from the sampling sites shows that pH was slightly acidic
188 in stations P1, P3 and P5. The temperature regime for the samples at all study sites ranged 26.6-29.5⁰C. The
189 temperature profiles were also statistically significant at $p < 0.05$. The significant difference for these results were
190 between stations for wastewater and sediment.

191
192 Similarly, TDS and EC levels from wastewater samples ranged as 375–449 mg/l and 501-812.6 μ S/cm,
193 respectively. The TDS concentrations from the wastewater samples were significant at $p < 0.05$, the turbidity
194 profile varied significantly ($p < 0.05$) at all sites, and ranged from 2.35 to 6.39 NTU. The dissolved oxygen in
195 the wastewater effluents range was 1.6 to 3.46 mg/l from all stations. The statistical significance of the DO
196 levels in the effluents was recorded. The determination of BOD₅ showed ranges from 33.6 to 201.6 mg/l. The
197 BOD₅ measurements did vary significantly ($p < 0.05$). The chloride concentrations of the effluents varied
198 widely, and ranged 34.30-61.06 mg/l, the concentrations were statistically significant, similar trend was
199 observed for salinity with 0.26 to 0.37 mg/l in the wastewater samples (Table 1). Similar trends were observed
200 for sediments in Table 2. Total Hydrocarbon (THC) content showed remarkable difference statistically with
201 values ranging from 0.58-3.18mg/kg while organic carbon had between 0.87-2.76 mg/kg showing significant
202 difference at $p < 0.05$ (Table 2). Values for Ammonium, Nitrates and Sulphates showed similar significant
203 differences at the various study sites. The nitrate content of sediment ranged from 21.04 to 28.08 mg/kg while
204 ammonium recorded values ranging from 14.21 to 28.05 mg/kg. These values were significantly different at $p <$
205 0.05. The textural class/particle size of sediments were analyzed for sand, silt and clay. . The percentage values
206 of sand recorded between 78.65-8.24, silt had values ranging from 0.83-7.45 while clay had 14.15-14.43. The
207 concentrations for sand and silt were statistically significant at $p < 0.05$ while clay samples did not show any
208 significant difference in the values obtained (Table 2).

209 Table1. Physicochemical Parameters of Wastewater Samples

Stations	pH	Temperature (⁰ C)	Conductivity (μ S/cm)	Salinity (mg/l)	Turbidity (NTU)	Total Dissolved Solid (TDS) (mg/l)	Dissolved Oxygen (DO) (mg/l)	Biological Oxygen Demand (BOD(mg/l))
P1	6.40±0.18 ^a	29.36±0.29 ^b	677.33±57.747 ^b	0.26±0.10 ^a	4.13±0.10 ^a	449.00±61.51 ^{ab}	1.46±0.153 ^a	201.6±2.57 ^d
P2	7.26±0.21 ^b	29.33±0.21 ^b	812.6±3.10 ^c	0.35±0.04 ^{ab}	4.9±0.70 ^c	543.00±17.44 ^b	1.33±0.12 ^a	180.8±0.90 ^c
P3	6.8±0.52 ^a	29.5±0.06 ^b	646.33±58.70 ^b	0.37±0.031 ^b	6.39±0.32 ^d	375.00±105.7 ^a	1.6±0.100 ^a	113.6±0.153 ^b

P4	7.40±0.100 ^b	26.6±2.10 ^a	501.00±5.30 ^a	0.28±0.044 ^a	2.35±0.040 ^a	397.6±43.09 ^a	3.46±0.551 ^b	33.6±0.38 ^a
P5	6.6±0.2 ^{ab}	29.40±0.44 ^b	670.6±51.7 ^b	0.27±0.021 ^a	3.33±0.58 ^b	414.6±37.9 ^a	2.9±0.513 ^b	140.5±55.455 ^{bc}

211 Values are means of three replicates. Means of the same superscript are not significantly different at ($p \geq 0.05$) while
212 means in the same column not followed by the same superscript are significantly different.

213 P1=Abacha Road; P2=Cherubim Road; P3= Kaduna Street; P4= Okija Street; P5= Olu-Obasanjo Road

UNDER PEER REVIEW

Table 2: Physico Chemical Parameters of Sediment Samples

Station	pH	EC ($\mu\text{S}/\text{cm}$)	Avail P (mg/kg)	THC (mg/kg)	Organic C (mg/kg)	Ammonium (mg/kg)	Nitrates (mg/kg)	Sulphates (mg/kg)	Sand (%)	Silt (%)	Clay (%)
P1	5.4 \pm 1.00 ^a	1235.11 \pm 0.99 ^b	34.99 \pm 0.17 ^a	3.18 \pm 0.07 ^c	2.76 \pm 0.05 ^{bc}	14.21 \pm 0.26 ^a	182.10 \pm 0.10 ^a	550.03 \pm 0.03 ^a	78.65 \pm 0.05 ^b	7.45 \pm 0.04 ^d	14.43 \pm 0.40 ^a
P2	5.6 \pm 0.90 ^a	293.10 \pm 4.44 ^d	19.67 \pm 0.35 ^a	0.73 \pm 0.03 ^a	0.87 \pm 0.02 ^f	21.05 \pm 0.05 ^c	70.04 \pm 0.03 ^d	237.43 \pm 0.21 ^c	85.20 \pm 0.05 ^a	0.85 \pm 0.05 ^a	14.15 \pm 0.15 ^a
P3	5.4 \pm 0.85 ^a	779.37 \pm 0.55 ^{ab}	17.31 \pm 0.28 ^a	1.14 \pm 0.40 ^{ab}	1.09 \pm 0.02 ^a	28.05 \pm 0.05 ^d	203.05 \pm 0.05 ^f	337.57 \pm 0.08 ^d	85.21 \pm 0.01 ^a	0.83 \pm 0.38 ^a	14.22 \pm 0.20 ^a
P4	5.7 \pm 0.50 ^a	302.45 \pm 0.61 ^c	10.41 \pm 0.18 ^a	0.58 \pm 0.03 ^a	0.92 \pm 0.03 ^f	21.04 \pm 0.05 ^c	112.04 \pm 0.04 ^b	275.15 \pm 0.15 ^f	85.24 \pm 0.04 ^a	0.84 \pm 0.40 ^a	14.38 \pm 0.35 ^a
P5	5.3 \pm 0.36 ^a	245.10 \pm 0.90 ^{ad}	22.80 \pm 0.02 ^a	0.74 \pm 0.04 ^a	1.11 \pm 0.03 ^a	28.03 \pm 0.03 ^d	126.04 \pm 0.03 ^c	250.12 \pm 0.13 ^b	85.23 \pm 0.04 ^a	0.85 \pm 0.04 ^a	14.15 \pm 0.18 ^a

Means with the same superscript are not significantly different ($p \geq 0.05$)

P1=Abacha Road; P2=Cherubim Road; P3= Kaduna Street; P4= Okija Street; P5= Olu-Obasanjo Road

DISCUSSION

The Ntanwogba creek is an open drainage system with socio- economic activities around it. The anthropogenic activities within the areas covered by this creek may result in pollution of water resources through improper disposal of wastes in such drains [8]. These wastes may occur in solid or liquid forms consisting of organic and inorganic wastes, spent oil or lubricants, pesticides and fertilizers, storm-water, runoffs from flash floods, erosion or water from car garages and cleaning centres. The solid wastes such as bottles, cans, plastics and other household products may result in blockage of drains [9; 10]. As a result of poor network of drainages, water runs over the ground during rainstorms, picks up faeces and contaminates water resources.

The wastewater characteristics assessed in this study have been reported to have fell short of the recommended limits in terms of the turbidity, BOD₅, nitrate, pH, TDS, temperature, DO and chloride concentrations, thus suggesting impairment of the water quality and the alteration of the ecological dynamics of the receiving water bodies. BOD measures the amount of oxygen required by microbes to break down organic matter, while COD is a measure of the amount of oxygen required for the chemical decomposition of organic and inorganic contaminants dissolved or suspended in water [11]. The determination of BOD and COD is useful in evaluating the compliance of effluents with water quality requirements standards, and also the estimation of the potential of organics present in effluent to deplete oxygen [12]. Indiscriminate defaecation and refuse disposal was observed at all the sampling stations. The slightly high BOD values may be attributed to the discharge of organic waste into water channel resulting in the uptake of DO in the oxidative breakdown of these wastes [25; 26]. The nearness of most sampling stations to dumpsites is also a factor promoting the loading of the water channel with organic matter hence, the high BOD values. The implication of high BOD in surface water could also mean that the oxygen present in the water will be used for decomposition of the pollutants, and thus, is not available for aquatic life anymore. The natural

background level for freshwater ranges from 1.0 to 3.0 mg/l. The BOD of a river must generally not exceed 4.0 mg/l. This would reduce DO from saturating to 5.0 - 6.0 mg/l which is still capable of supporting aquatic life (9; 26). The COD level clearly depends on the type of wastewater, this problem is associated with poor sanitation of these drains which hinders on lack of implementation of waste management practices. The continuous discharge of effluent through various socioeconomic activities around the drainage channels in Port Harcourt with low-

UNDER PEER REVIEW

dissolved oxygen and high BOD into drainage paths suggest increased organic loading, and in turn potential negative impacts on such receiving water systems, which may cause harm to aquatic life [13;14]. Also, low oxygen content may cause increased toxicity of certain substances, and this may induce stress responses in the aquatic ecosystem especially when it flows into major water bodies and resources. Increased COD levels also have a similar effect on surface water [12]. The BOD and COD levels recorded in this study were similar to those reported elsewhere [13; 14]. Chloride occurs in all natural waters in widely varying concentrations. Excessive chloride in potable water is not particularly harmful and the criteria set for this anion are based primarily on palatability and its potentially high corrosiveness [15] Chloride content in excess imparts a salty taste to water and people who are not accustomed to high chlorides may be subjected to laxative effects.

One important characteristic of discharged wastewater effluents that often impacts receiving waters is its nutrient content. Excessive nutrient loading, especially in regards to nitrogen and phosphorus, is a major ongoing threat to freshwater quality worldwide, particularly in water-scarce countries such as the Niger Delta and other developing countries [16]. Many aquatic systems have very low ambient nutrient concentrations, and small shifts in the nutrient load can result in dramatic changes in the aquatic community structure. High concentrations of nitrates above the 15 mg/l limit were recorded in all stations studied along the open drainage channels. Likewise, nitrate has been reported to be toxic to humans and animals. Methemoglobinemia is usually formed during the nitrate-induced oxidation of haemoglobin, which prevents normal oxygen binding and leads to hypoxia [17]. Therefore increased nitrate contamination of water bodies may raise serious concerns as seepage of such contaminants may cause pollution of aquifers or many water resources used for both domestic and industrial uses. Increased nitrate and phosphorus levels in discharged effluents will promote excessive growths of aquatic plants and algae, thus contributing to eutrophication and resulting in undesirable ecological effects within the receiving water bodies [13]. Ammonium ions have also been reported to have toxic effects on fish [17;18]. These compounds are becoming increasingly significant in water and wastewater management because the discharge of nutrients such as nitrogen and phosphorus into rivers, lakes and stagnant drains can cause adverse influences on our environment and life. An excessive increase in the quantities of these nutrients in the aquatic surroundings disturbs the ecological balance, resulting in severe damage to the environment.

There was notably excessive turbidity in the discharged effluents in the open drainages during the sampling periods (Table 1). One major implication of the excessive turbid effluents in the open water drainage system is a reduction in light penetration, which may result in the decline of the rate of photosynthesis by the aquatic plants. This may in turn lead to less food being available for the aquatic animals [19]. Organic compounds are added by human excrement and other domestic wastes. These organic and inorganic compounds are added by industrial wastes and several anthropogenic activities around the open drainage channels such as slaughter houses, factories, paper mills, creameries, chemical and metal industries which contribute acids and salts of metals and other inorganic chemical wastes [20]. Excessive turbidity affects the effectiveness of chlorination during disinfection in

wastewater treatment, resulting in the failure of removal of microorganisms [21; 22]. High turbidity has been shown to hinder the effectiveness of disinfection in water, and often correlates with microbial load within water resources [22]. This result actually shows that the drains were highly contaminated with different pollutants due to human activities as well as flash floods during raining seasons [23]. Nitrate concentration in most of the sampling stations were above permissible limits due to several anthropogenic activities in close proximity to the open drainages and even direct discharge of untreated waste and human faeces into the open drainages thereby causing surface pollution (Plates1-3). Oxidation of nitrogen in water as ammonia from animal and human wastes to nitrite, nitrates and other organic molecules is a possible way of nitrate entry into the groundwater aquifer [24].

Conclusion

There have been increasing detrimental impacts on freshwater ecosystems, including the notable eutrophication and pollution of many rivers. The findings of this study revealed inadequacies in effective waste management and improvement of existing drainage systems in Port Harcourt, as continuous discharge of untreated effluents arising from various anthropogenic activities around drainage channels has caused a high concentration of organic matter in the open drains hence in this study, the noncompliance of some of the physicochemical parameters assessed including BOD, COD, nutrient concentration like nitrate, turbidity, and chloride concentrations may contribute to eutrophication in the receiving watershed and consequently alter the ecosystem balance of water resources. In the event of any chlorination of such water bodies there may be a chance of formation of carcinogens resulting from the chlorination of highly turbid effluents, which constitute a public health threat. Therefore, more effort should be invested in curbing the indiscriminate discharge of poor-quality effluent into the drainage channels.

References

1. Ogbonna, D.N and Ideriah, T. J. (2014). Effect of abattoir on the physico-chemical characteristics of soil and sediment in Southern Nigeria. *Journal of Scientific Research and Reports*, 3 (12): 1612-1632.
2. Ristola, T., Pellinen, J., Ruokolainen, M.A. and Jussi, V.K (1999). Effect of Sedimentary Type, Feeding Level and Larval Density on Growth and Development of a Midge (*Chironomus riparius*). *Solar Journal, Environmental Toxicology and Chemistry*: 18, 756-764.
3. EPA, (1996). Load-based Licensing: Draft Operational Plan, Environmental Economic Series, EPA Publication 96/38, Environmental Protection Authority, Sidney.
4. Gobo, A E; Ubong, I U and Ede, P N (2008). "Relationship between rainfall trends and flooding in the Niger-Benue river basins". *Journal of Metrology*. 13:13

5. Adesemoye AO, Opere BO, Makinde SCO (2006). Microbial content of abattoir waste water and its contaminated soil in Lagos, Nigeria. *African Journal of Biotechnology* 5(20):1963-1968
6. Prescott LM, Harley JP, Klein DA(2005) Microbiology. 6th ed. McGraw Hill, London; 2005.
7. APHA, (American Public Health Association; American Water Works Association (AWWA); Water Environmental Federation (WEF)) 2012. *Standard Methods for the Examination of Water and Wastewater*, 22nd ed.; American Public Health Association; American Water Works Association; Water Environmental Federation
8. Ogbonna, D. N., Chilaka, S. N., Gobo, A .E and Amangabara, G. T, (2008). Effect of waste disposal practices and perennial flooding in Port Harcourt Metropolis, Nigeria”. *Journal of Research in Bioscience*, 4(3), 103-110.
9. WHO, “Guidelines for Drinking-Water Quality, Volume 1: Recommendations. Geneva: WHO,” 2009. http://www.who.int/water_sanitation_health/dwq/GDWQ_2004web.pdf
10. Ogbonna, D.N (2017). Public health implications of pathogenic fungi isolated from open drains in Port Harcourt. *Journal of Medical and Pharmaceutical Science*, 3: 24-33.
11. Salem, I.B., Ouardani, I., Hassine, M. and Aouni, M. (2011), Bacteriological and physicochemical assessment of wastewater in different region of Tunisia: Impact on human health *Journal of Medical and Pharmaceutical Science*,. 4, 144.
12. World Health Organisation. (2017).Guidelines for Drinking Water Quality, 3rd ed.; Recommendations; World Health Organization.
13. Morrison, G., Fatoki, O.S., Persson, L., and Ekberg, A. (2001). Assessment of the impact of point source pollution from the Keiskammahoek Sewage Treatment Plant on the Keiskamma River-pH, electrical conductivity, oxygen-demanding substrate (COD) and nutrients. *Water Scientific Assessment*. 27, 475–480.
14. Bhujangaiah, N.S., and Nayak, P.V. (2005). Study of ground water quality in and around Shimoga city, Karnataka., *J. Ind. Coun. Chem.*, 22(1), 42-47
15. Muller, M., Schreiner, B., Smith, L., Koppen, B., Sally, H., Aliber, M., Cousins, B., Tapela, B., Merwe-Botha, M. and Karar, E. (2009). Water security in South Africa. In Development Planning; Working paper Series No.12; DBSA: Midrand, South Africa

16. Akinlua, A. and Asubiojo, O.I. (2006). Physicochemical and trace metal characterization of battery factory wastewater. *Journal of Applied Science*. 6, 1456–1462.
17. Guillette, L.J., and Edwards, T.M. (2005) Nitrate an ecologically relevant endocrine disruptor in vertebrates. *Integrated Comprehensive Biology*, 45, 19–27.
18. Avery, A.A. (1999). Infantile methemoglobinemia: Reexamining the role of drinking water nitrates. *Environmental Health Perspective*. 107, 583–586.
19. Palmer, C.G. and Berold, R.S., (2004) Muller, W.J. Environmental Water Quality in Water Resources Management; WRC Report No TT 221/04; Water Research Commission: Pretoria, South Africa.
20. Odjadjare, E.E. and Okoh, A.I. (2010) Physicochemical quality of an urban municipal wastewater effluent and its impact on the receiving environment. *Environmental Monitoring Assessment*, 17, 393–394.
21. Fatoki, O.S., Muyima, N.Y.O. and Lujiza, N. (2001), Situation analysis of water quality in the Umtata River catchment. *Water Scientific assessment*, 27, 467–473.
22. Obi, C.L., Momba, M.N.B., Samie, A., Igumbor, J.O., Green, E. and (2007) Musie, E. Microbiological, physicochemical and management parameters impinging on the efficiency of small water treatment plants in Limpopo and Mpumalanga Provinces of South Africa. *Water Scientific Assessment*. 33, 229–237.
23. Ibe, S.R., Egereonu, U.U. and Sowa, A.H.O. (2002). The impact of hand pumps corrosion on water quality in rural areas of West African sub-region. *Environmental Monitoring Assessment*. 78, 31–43.
24. Gerba, C.P. and Smith, J.E. (2005). Sources of pathogenic microorganisms and their fate during land application of wastes. *Journal of Environmental Quality*, 34, 42–48.
25. Akuffo, S. B (1998). “Pollution Control in a Developing Country: A Case Study of the Situation in Ghana,” 2nd Edition, Ghana Universities Press, Legon.
26. Nartey, V K; Hayford, E K and Ametsi, S K (2012). Assessment of the Impact of Solid Waste Dumpsites on some surface water systems in the Accra Metropolitan Area, Ghana. *Journal of Water Resource and Protection* 4:605-61

UNDER PEER REVIEW