

Exploitation of Empty Palm Fruit Bunch for the Generation of Electricity

10
11
12

ABSTRACT

Electricity is very important for the growth and economy of a country. Biomass wastes such as waste from oil palm plantation companies can be harnessed for this purpose since they are usually abundant in nature. The aim of this study is to evaluate the utilization of empty palm fruit bunch for the generation of electricity. The empty fruit bunch (EFB) was used in firing a steam turbine plant (boiler) for the generation of electricity. The power plant that was used in this research is owned by PRESCO Nigeria Limited located in Ikpoba-Okha local government area of Edo state. 1.7 MW of electricity was generated by burning empty fruit bunch (EFB) at a rate of 896 kg/h when the steam boiler was used. This value was compared with the traditional power plant fired using methane gas which produces 4.5 MW. This value (1.7 MW) shows that EFB is a very good alternative for firing a boiler plant, power generation and elimination of wastes from the plant.

13
14
15
16

Keywords: *Empty palm fruit bunch, Waste conversion, Power generation, Renewable energy, Nigeria*

1. INTRODUCTION

17
18
19
20
21
22
23

Energy is a social and economic need of any country. The energy use in any country is expected to continue to increase as its population increases [1]. Nigeria's population has increased from 159 million in 2010 to about 187 million in 2016, which will demand about 25000 MW for homes and industries in order to have stable electricity. Electricity is essential for the economic growth and improvement of the standard of living of the increasing population. Therefore without adequate basic energy supply, people will not be able to meet up to their domestic needs such as cooking, lighting their home and chilling up their perishable goods and other needs that require electricity [2].

24
25
26
27
28
29
30

The demand for energy is increasing globally especially in Nigeria, in which the chief sources of power generation are hydro, steam and gas turbine. A lot of research activities have been done in Nigeria and some are still going on to find a solution to this power problem in the country in order to find substitutes to fossil energy [3]. These alternatives are intended to address concerns about the exhaustion of fossil fuel because they cannot be used forever. Apart from depletion, other significant concerns include the adverse effect on the environment, the unstable politics/market and particularly in Nigeria, the proliferation of 'resource control' struggles with the attendant sabotage activities as well as epileptic /interrupted power supply.

31
32
33
34
35
36
37

Oil palm (*Elaeisguineensis*) is one of the most important economic oil crops in Nigeria. According to the *World Rainforest Movement* (WRM), oil is indigenous to the Nigerian coastal areas [4]. An oil palm plantation produces enormous volumes of wastes such as empty fruit bunches (EFB), palm kernel shell (PKS) and palm oil mill effluent (POME). Empty palm bunch contains neither chemical nor mineral additives; it is free from foreign materials depending on handling operations at the mill. Pre-processing of EFB is essential before it can be measured as a high-grade fuel since the moisture content is approximately 70%. This material is very cheap for the generation of electricity due to its high availability compared to the conventional system (hydro and gas turbine) which is very expensive. Nigeria generates a considerable quantity of agro-

38 waste. This will present great prospects for exploiting biomass energy in an eco-friendly and commercially viable manner.
39 EFB can be transformed into renewable energy resources that could meet the needs of industries and the **national**
40 **grid(9.0820° N, 8.6753° E) (Figure 1)**. To achieve this, pre-treatment steps such as shredding and dewatering are
41 required in order to improve the fuel property of the empty palm bunch. In fact, **the palm** oil mill (POM) using a
42 cogeneration system for producing steam and electricity demands using one source of fuel in the milling process. The
43 cogeneration system consists of a boiler, turbine, and generator. Fiber and shell are burnt directly in the boiler to form
44 superheated steam (fiber 65:35). Half of the steam is used for milling processes. Residual steam is converted to electricity
45 using a turbine. Fiber, shell and empty palm bunch are useful for the heating purpose because of **their calorific values**.

46 Palm oil is currently the world largest source of edible oil. Palm oil **mills** in Nigeria produces about 0.94 million tones and
47 1.54% of world total oil produced in 2015. **It is predicted that the world's demand for oil palm will increase due to the**
48 **increasing population, food demand, and industrialization**. The more crude palm oil (CPO) produced the more biomass
49 wastes. A palm oil mill (PMO) wastes is around 13-17 % fiber, 6–10 % shell and 25-27% empty fruit bunch (EFB) based
50 on its capacity. However, this biomass waste is needed to be utilized effectively to overcome the problem. These **wastes**
51 can be converted into energy using incineration or other chemical processes. Palm biomass has been long identified and
52 utilized as renewable energy **but its application in power plant is not common**. Due to its heating value, it can be used as
53 fuel for electricity production. According to the global market, the price of petroleum is increasing steadily. As a result
54 industrial sectors are searching for alternative means for generating their electricity to replace the petroleum fuel in other
55 to reduce **cost [5]**. Indonesia and Malaysia, which **are** the world's largest palm oil producing countries generate 53.6% and
56 36.8% of total world oil production with about 33.4 and 19.9 million tons per annum of crude palm oil, respectively. These
57 have assisted in changing the economy of these countries drastically. They generate electricity from the waste biomass of
58 empty palm bunch in addition to other products. One of the unique aspects of Malaysian renewable energy sources is that
59 the palm oil mill is self-sufficient in energy using palm press fiber (PPE), empty fruits bunch (EFB), and shell as fuels to
60 generate steam in waste fuel boilers for processing and power generation with steam **turbines [6]**. This delivery electricity
61 concept can be applied to support electricity demand in Nigeria using the national grid line as the distributing system.
62 Also, some companies in Nigeria such as **Nigeria Institute for oil palm oil research (NIFOR)** located in Ovia South East and
63 **PRESCO Palm Oil Industry** located in Ikpoba-Okha Local Government, Edo State Nigeria depend on empty palm fruit
64 bunch for electricity generation, which has saved them from the problem of power interruption and cost. **The empty palm**
65 **fruits bunch is abundantly available**.

66 Oil palm biomass wastes emerge as a potentially major contribution to renewable energy as **the Malaysian government**
67 has now shifted from conventional sources such as coal, oil, and gas to promoting renewable energy sources in order to
68 increase energy security. Indeed the combustion of fossil fuels' as sources of energy for heat, transportation, and
69 electricity is known to be the major factor contributing to global warming. The world is moving from the conventional non-
70 renewable energy sources to renewable energy sources due to their renewability and eco-friendly nature, which is critical
71 for the future generation of power. The Malaysian government has made several efforts to encourage the use of
72 renewable energy to scale down dependency on fossil fuels and to meet the growing demand for energy. As a result, the
73 Fifth Fuel Policy was introduced in 2001 to encourage new renewable energy sources such as oil palm, rice husk, and
74 wood waste to compliment the conventional energy **supply [7]**. The adoption of this fifth-fuel policy was supported by the
75 implementation **of small renewable energy power (SREP) [8]**. Sarawak, one of the largest town in Malaysia has the
76 potential to generate a total of 425 MW of electricity from biomass sources, where 375 MW of this amount was contributed
77 by palm biomass. In Nigeria, most of the electricity generated is from **gas-fired** thermal power plant which uses several
78 methods in its conversion. One of the methods is burning the gas in a boiler to produce steam, which is then used by a
79 steam turbine to generate electricity. **This has led to the over-dependence on conventional oil, which in turn has led to gas**
80 **flaring. Agricultural biomass can be converted to useful products**. Over-dependence on hydropower and steam turbine in
81 Nigeria has made this biomass to be underutilized. Considerable research and development are currently ongoing to
82 develop smaller gas fires that would produce electricity on a small scale. Currently, biomass is used for off-grid electricity
83 generation but almost exclusively on a large industrial **scale [9]**.

84 Lignocelluloses biomass wastes produced from oil palm industries include palm kernels cakes (PKC), palm kernel shells
85 (PKS), empty fruit bunch (EFB), oil palm tusk (OPT), oil palm fronds (OPF), palm press fibers (PPF) and palm oil mill
86 effluent (POME). Oil palm waste is a reliable resource because of its availability, continuity, and capacity for renewable
87 energy solution. Furthermore, the presence of oil palm waste has created a major disposal problem, thus has a negative
88 effect on the environment. Therefore to avoid this negative effect on the environment this work will address this issue *by*
89 *EXPLOITING THIS PALM BIOMASS IN GENERATING ELECTRICITY*. Apart from power generation, the fresh palm fruits
90 (FPF) will also yield other products which will boost the economy and gross domestic product (GDP) of the country and
91 create jobs. The increase in the population brings about an increase in the demand for electricity. Since the demand is
92 high, the conventional source of generating electricity has not been able to meet the demands of the increasing
93 population. The shortage of electricity has severely hampered the development of Nigeria, therefore to lessen the problem

94
95

of power failure and the huge cost of using petroleum for generating power in industries, an alternative has been investigated.

96
97
98
99

This work evaluated the exploitation of empty palm fruit bunch as renewable energy for electricity generation. The empty palm bunch was used for firing the steam turbine (boiler) for the generation of electricity. The calorific value and heat intensity were also determined.



Figure 1. The national grid of Nigeria [10, 11].

2. MATERIAL AND METHODS

2.1 Materials Collection

120 tons of fresh fruit bunch was obtained from the oil palm plantation of PRESCO Nigeria Limited located at Obaretin Estate, Ikpoba-Okha local government area, Edo state, which generates 60 tons of fresh fruit bunches/hour. The fresh fruit bunch was further processed in order to get the desired raw material, which was used to fire the boiler. The empty fruit bunch (EFB) is a solid waste residue generated from the palm oil mill (POM) after the oil is extracted out. It is done in the process of extracting the crude palm oil, through the heating chamber with steam to peel off the EFB easily. The EFB is stripped by a separate machine from the palm fruit bunch. Figure 2 shows the fresh and empty fruit bunch.

The empty fruit bunch are fibrous materials and the moisture content is low compared to the other biomass residues. It contains residue of palm oil which gives it a high heating value than any other average lignocelluloses biomass. The palm press fiber and palm kernel shells that were generated in the palm oil mill (POM) were used as a solid fuel for steam boilers. The heat in the steam boilers was used in addition to empty fruits bunch (EFB) to run the steam turbine for

100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117

generating the electricity. A careful breakdown was carried out in the course of this research in a well-established palm oil mill like PRESCO Nigeria. It is expected that every 100 tons of palm fresh fruit processed yields 20-24 tons of crude palm oil, 19-21 tons of empty fruits bunch, 15 tons of oil-rich fiber, 5 tons of shells, 3 tons of palm kernels, 16% moisture content and 20% effluent. The potential of biomass wastes of oil palm plantation is shown in Figure 3.

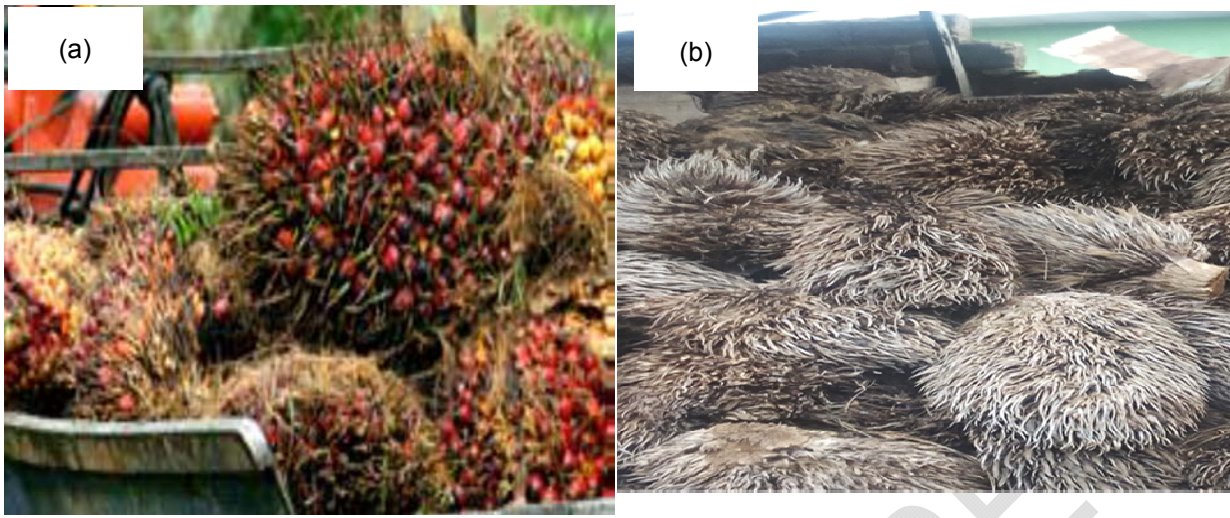


Figure 2. Fresh fruit bunch and empty fruit bunch.

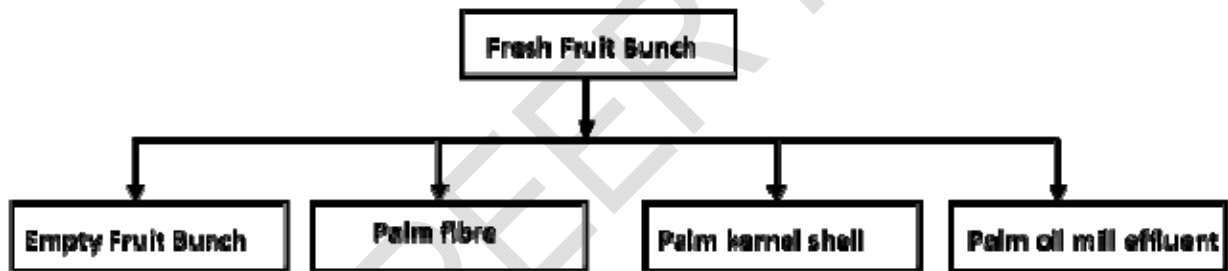


Figure 3. Diagrammatic presentation of biomass/waste potential from oil palm plantation.

2.2 Pretreatment of Empty Palm Fruit Bunch

Pretreatment of empty palm fruit bunch is very important in order to increase its digestibility and its degree of conversion. The method of pretreatment that was used in this study is the chemical pretreatment, which involves diluting acid hydrolysis and alkaline pretreatment. Ammonia (NH_4) and hydrogen peroxide (H_2O_2) solutions were used to increase the digestibility of the EFB. Fast pyrolysis with alkaline solutions (NaOH and $\text{Ca}(\text{OH})_2$) was done followed by the addition of H_2O_2 . Alkaline pretreatment has been proved by researchers to be the best [12, 13, 14, 15]. The effectiveness of alkali pretreatment might be attributed to its capability in lignin degradation.

2.3 Conversion Process

The conversion process used for this research work was the thermochemical conversion. Thermo-chemical conversion of biomass (EFB) involves heating the biomass in the absence of O_2 to yield a mixture of gas, liquid and solid [15]; the products were used as fuels after further conversion. Generally, lower reaction time (a few seconds or minutes) is required for thermochemical processes. These generally include biomass pyrolysis, gasification, and torrefaction [15].

2.3.1 EFB pyrolysis

Pyrolysis is the thermal degradation of biomass materials in the absence of oxygen [16]. It can be performed at a moderate temperature (400 – 600°C) for a short period of time [17]. Products of pyrolysis may comprise gases (methane, hydrogen, carbon monoxide, and carbon dioxide), liquids (water, and oil/tars) and solids (charcoal). The efficiency of

pyrolysis and the fractions of gas, liquid, and solid produced basically depend on the process factors such as pretreatment condition, temperature, time of retention and reactor type [15]. Misson et al. [14] observed that NaOH and Ca(OH)₂ couldn't modify the composition of the lignin significantly. In addition, the pretreated EFB was catalytically pyrolyzed more efficiently than the untreated EFB samples under the same conditions. Abdullah and Sulaiman [6] also observed that gas production was more favorable at higher temperatures, and the moisture content was nearly constant in the range of temperatures examined using bench top fluidized bed reactor with a nominal capacity of 150 g/L.

2.3.2 EFB Gasification

The gasification process is an extension of the pyrolysis process except that it is piloted at an elevated temperature (800–1300 °C), which implies that it is more favorable for gas production [15]. The gas stream is largely composed of hydrogen, methane, carbon dioxide and carbon monoxide. Biomass gasification presents numerous advantages including decreased CO₂ emissions, accurate combustion control, compact equipment requirements with a relatively small footprint, and high thermal efficiency [18]. The key challenge in gasification is allowing the pyrolysis and gas reforming reactions to occur using a minimum amount of energy; therefore, gasifier design is important. An entrained-flow gasifier for the gasification of EFB at 900 °C was used by Ogi et al. [19]. The rate of gasification was enhanced (>99%) when O₂ was added to H₂O₂ than using H₂O₂ alone. Gasification was suggested as the most appropriate thermo-chemical route for EFB conversion to biofuels [15]. The process flow diagram of the EFB gasification unit is shown in Figure 4 [15].


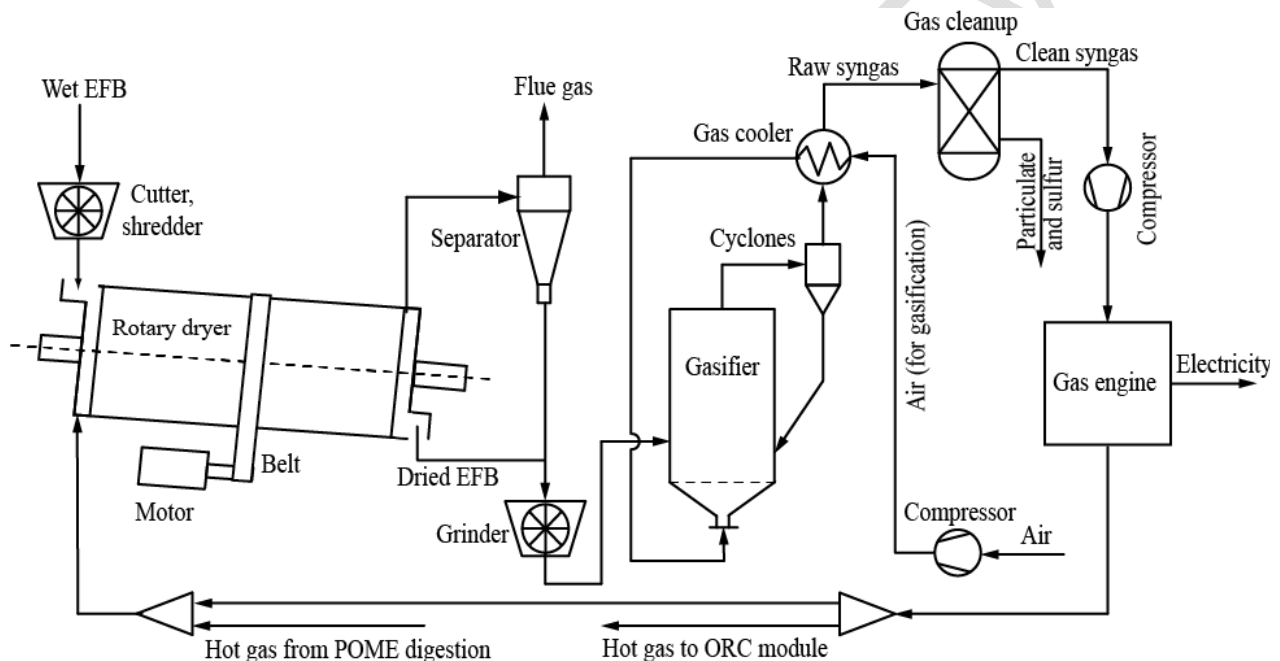


Figure 3. Process flow diagram of the EFB gasification unit [15].

2.3.3 EFB Torrefaction

Torrefaction is a thermal conversion of biomass at the low-temperature (200-300 °C) [20]. Biomass is pretreated to produce a high-quality solid biofuel that can be employed for gasification and combustion. It is centered on the removal of O₂ from biomass to yield fuel with improved energy density. Several reaction conditions (inert gas, temperature, and reaction time) and biomass resources lead to differences in gaseous, liquid, and solid products. Uemura et al. [21] examined the influence of torrefaction on the basic properties of EFB, mesocarp fiber and kernel shells as a possible source of solid fuel. The mesocarp fiber and kernel shell exhibited excellent energy yield with values higher than 95% while EFB exhibited a poor yield of 56%. Torrefaction can also be achieved in the presence of oxygen [22]. Figure 5 presents the pretreatment and the conversion process for the palm empty fruit bunch [15].

184
185
186
187

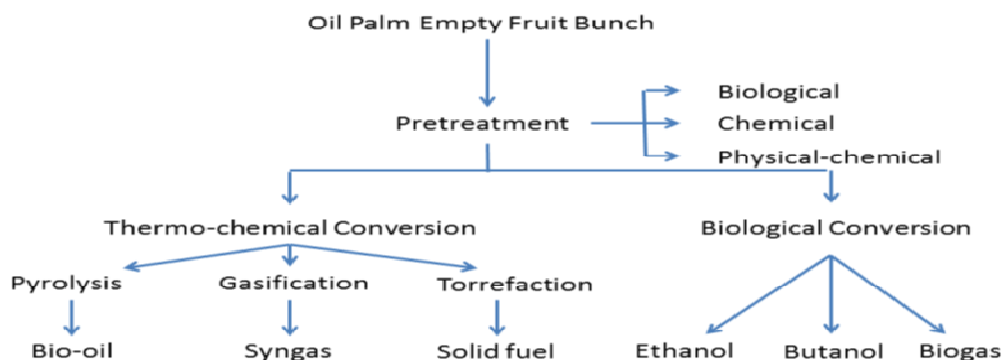

188
189
190 **Figure 5.** The pretreatment and the conversion process for Palm Empty Fruit Bunch [15].
191


2.4 Equipment

192
193 The boiler used in this work is the PRESCO Nigeria steam boiler. It has a capacity of 25bar and was used in burning 896kg of EFB per hour, which generated 1.7 MW of electricity when compared with the combustion of methane gas, which will produce 4.58 MW of electricity. The boiler produced the required heat energy for generating the electricity. The heat generated with the boiler using 896kg of EFB had a calorific value of 19500 kJ/kg. The chimney was used in order to allow a smooth flow of heat generated by the boiler to effectively power the turbine. It is 200m tall with a diameter of 3.3 m. The steam turbine used in this work was PRESCO Nigeria limited plant located in Ikpo-Okha Local Government Area of Edo State. It has a capacity of generating up to 1.99 MW of electricity. But for the case of this work, 1.7MW was generated when a fuel (EFB) of 896 kg was combusted per hour.
199
200
201

2.5 Generation Process

202 The technology used for this project is the steam turbine. It involves some stages of conversion; it extracts thermal energy (heat) from the fuel (EFB) in the combustion chamber via the steam boiler to raise the steam, converting the heat energy generated into kinetic energy in the steam turbine and finally using a rotary generator to convert the turbine mechanical energy into electrical energy. Figure6 shows the electricity generation plant using EFB. The three stages of energy conversion are illustrated below
203
204
205
206
207

208 Heat energy (steam boiler) → Mechanical energy (steam turbine) → Electrical energy (Generator)
209

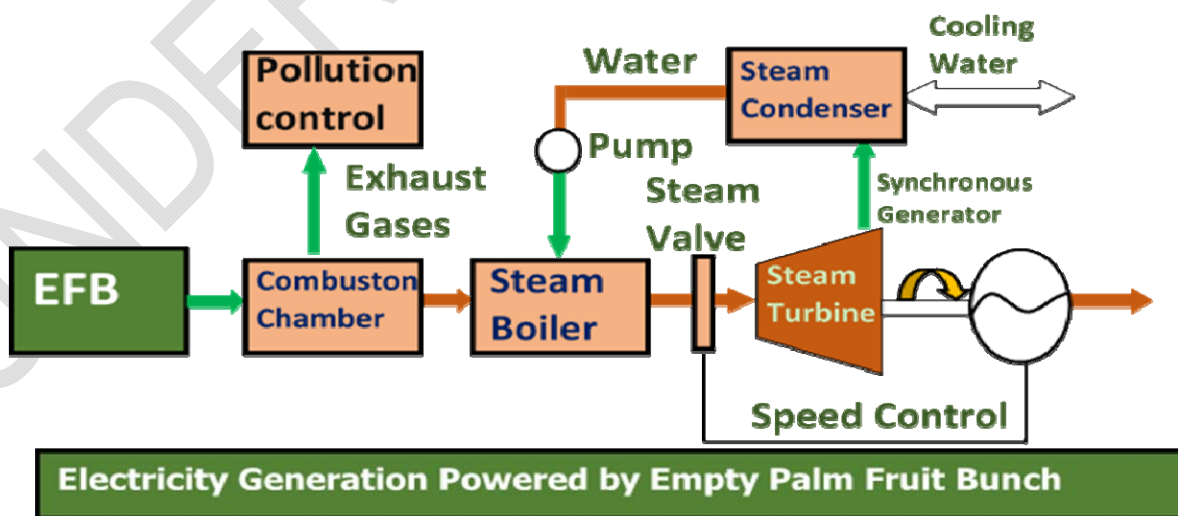

210
211
212 **Figure 6.** Electricity generation plant using EFB.
213

To achieve this successfully, the moisture content of the fuel was reduced by drying the biomass (EFB) properly and drying up the resulting fuel in order to increase the quality of heat needed to power the steam turbine.

3. RESULTS AND DISCUSSION

3.1 Physicochemical Properties of Empty Fruits Bunch (EFB)

Empty fruit bunch possesses its own physical and chemical properties like the other sources of fuel. The proximate and ultimate analysis was done on the EFB to ascertain its properties. The properties of EFB are presented in Table 1.

Table 1. Properties of EFB

Components	Value	Unit
Cellulose	58.3	%(w/t)
Hemicelluloses	23.4	%(w/t)
Lignin	19.2	%(w/t)
Proximity Analysis		
Moisture	9.36	%(w/t)
Volatile	78.59	%(w/t)
Ash	5.31	%(w/t)
Fixed carbon	15.42	%(w/t)
Ultimate Analysis		
Carbon	46.2	%(w/t)
Hydrogen	6.4	%(w/t)
Oxygen	44.39	%(w/t)
Nitrogen	0.66	%(w/t)
Sulphur	0.08	%(w/t)
Other Properties		
Low heating value	13200	kJ/kg
High heating value	19500	kJ/kg
Bulk Density	113.92	kg/m ³

3.2 Chemical Formula of Empty Fruit Bunch (EFB)


The chemical formula for EFB was derived in this study. The formula of EFB Fuel sample is given as:



If Eq. 1 is on the basis of 95kg sample of EFB, the composition by mass is given as (according to Table 1):

C: $12a = 0.462$, $a = 0.462/12 = 0.039$; H: $1y = 0.064$, $y = 0.064$; O: $16r = 0.4439$, $r = 0.028$; N: $14v = 0.0066$, $v = 0.00047$; S: $32m = 0.0008$, $m = 0.000025$.

Substituting these values of a, y, r, v and m yields Eq. 2, which is the formula of the fuel sample.



The amount of heat liberated by the rate of feeding into the combustion chamber through the furnace was also evaluated. The empty palm fruits undergo a shredding process by cutting the EFB into smaller pieces to lose its structure, this help to improve the volume weight ratio and enhance the fuel characteristic. Figure 6 illustrates the schematic diagram of the steam turbine [22].

The combustion ratio (CR) and heat released, Q were calculated below using Eqs. 3 and 4 [22], respectively. Eq. 3 was used to calculate the combustion rate by burning 896kg of EFB per hour which gives the rate of feeding per hour.

$$CR = \frac{\text{Total mass of burnt fuel}}{\text{Burning time}} \quad (3)$$

$$= \frac{896}{1 \text{ hr}} = 896 \text{ kg/hr}$$

$$Q = \text{Calorific value} \times \text{Combustion rate} \quad (4)$$

$$= 19500 \times 896 = 17472000 \text{ kJ} = 17.47 \text{ GJ}$$

The average feeding per hour of operation and heat released were obtained as 896 kg and 17.47 GJ, respectively.


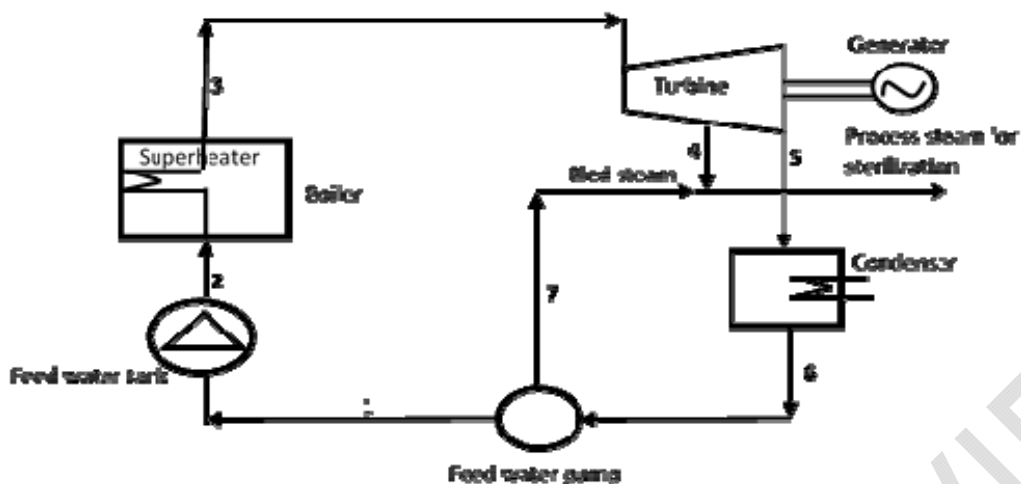


Figure 6. Schematic diagram of the steam boiler [22].

3.3 Combustion of Empty Palm Fruit Bunch

The combustion of EFB in the boiler taking the calorific value, its ash content, fuel size, and moisture content into account. Complete combustion of EFB will produce water vapor (H_2O), carbon dioxide (CO_2) and other products. The combustion of EFB is explained by Eq. 5:



$$C: 0.039=p, p=0.039; H: 0.064=2q, q=0.064/2=0.032; S: 0.000028=t, t=0.000025$$

$$0.028+2y = 2p + q + 2t$$

$$2y = 2p + q + 2t - 0.028$$


$$y = 2(0.039) + 0.032 + 2(0.000025) - 0.028$$

$$y = (0.011005 - 0.028)/2 = 0.041$$

$$N: 0.00047 + 2y(79/21) = 2u$$

$$u = \frac{0.00047 + 0.387}{2} = 0.194$$

Therefore, the balanced equation is given as



Eq. 6 shows the complete combustion of EFB. Water vapor, carbon dioxide and other products were obtained. If the EFB is completely dry, the moisture content is reduced.

3.4 Power Generated by the Empty Fruit Bunch

The power produced by burning 896 kg of empty fruit bunch is given below by putting the following parameters into consideration [22]:

Calorific value (CV) = 19500 kJ/kg

Combustion efficiency ($\eta_{\text{combustion}}$) = 95%

Mass of fuel (EFB) = 896 kg

Cycle efficiency (η_{circle}) = 45%

Turbine efficiency (η_{turbine}) = 90%

Boiler heat transfer efficiency ($\eta_{\text{heat transfer}}$) = 90%


The power generated was calculated using Eq. 7 [23]:

$$\text{Power} = \frac{m \times Cv \times \eta_{\text{turbine}} \times \eta_{\text{combustion}} \times \eta_{\text{circle}} \times \eta_{\text{heat transfer}}}{3600} \quad (7)$$

$$\text{Power} = \frac{896 \times 19500 \times 0.9 \times 0.95 \times 0.45 \times 0.9}{3600} = 1680.588 \text{ kW} = 1.7 \text{ MW}$$

285 **3.5. Comparison between Empty Fruit Bunch Power Generated and the Conventional Gas Fired Boiler**
 286 **using Methane Gas of Same Mass of Fuel**

287 Combustion of methane gas is given as [22]:



289 Heat released by methane gas is given as:

290 Heat released, $Q = \text{calorific value} \times \text{combustion rate}$ (9)

291 Where Calorific value of methane gas = 55178.2kJ/kg, Mass of methane gas = 896kg
 292 $Q = 55178.2 \times 896 = 49439667.2 \text{ kJ} = 49.43 \text{ GJ}$

293 Power produced from burning 896kg of methane gas is calculated using Eq. 6 when the same parameters for EFB were
 294 considered.

295 Where Calorific value (Cv) = 53178.2kJ/kg, Combustion efficiency ($\eta_{\text{combustion}}$) = 95%, Mass of fuel (methane) = 896kg,
 296 Cycle efficiency (η_{circle}) = 45%, Turbine efficiency (η_{turbine}) = 90%, Boiler heat transfer efficiency ($\eta_{\text{heat transfer}}$) = 90%

297
$$\text{Power} = \frac{m \times Cv \times \eta_{\text{turbine}} \times \eta_{\text{combustion}} \times \eta_{\text{cycle}} \times \eta_{\text{heat transfer}}}{3600}$$
 (10)

298
 299
 300
$$\text{Power} = \frac{896 \times 53178.2 \times 0.9 \times 0.95 \times 0.45 \times 0.9}{3600} = 4583.109 \text{ kW} = 4.58 \text{ MW}$$

301 **3.6. Calorific Value of Fuel from EFB**

302 The calorific values of fuels from empty fruit bunch (EFB), palm kernel shells (PKS) and palm press fiber (PPF) are shown
 303 in Table 2 and Figure 7. All the fuels can generate good heat for firing steam boiler but EFB has the highest calorific value,
 304 therefore, it is more favorable for this work. The calorific value of 19500 kg/kJ was produced when 896 kg of EFB was
 305 used in firing the steam boiler to get 1.7 MW of electricity. This value obtained is slightly higher than the results obtained
 306 by Olisa and Kontingo [22]. The authors obtained 1.5 MW by using 840 kg of EFB in firing a steam boiler.

307 The moisture content of the fuels from empty fruit bunch, palm kernel shells and palm press fiber was also considered
 308 (Table 3 and Figure 8). The moisture content was calculated using Eq. 11:


309
$$Y_w = \frac{M_1 - M_2}{M_1} \times 100$$
 (11)

310 Where Y_w is the moisture content, M_1 is the initial mass of fuel and M_2 is the final mass of fuel after drying.
 311 It was observed that the empty palm fruit bunch has the highest percentage moisture. To ensure proper heating value, it
 312 was first dried up and a superheater was incorporated in the boiler in order to increase the heating rate.

313 Power generated by the different mass of EFB fuel and methane is presented in Table 4. They were also compared as
 314 seen in Figure 9 and Table 4. The results revealed that EFB can produce about 36.6% of what methane gas can produce
 315 giving the same amount of fuel. For the power plant using methane gas, it will cost more compared to the plant using
 316 EFB that may cost very little due to its availability especially to a country like Nigeria.

317 **Table 2. The calorific value of various fuels from EFB, PKS, and PPF.**


Fuel	Calorific value(kJ/kg)
Empty fruit bunch	19500
Palm kernel shell	16200
Palm fiber	11500

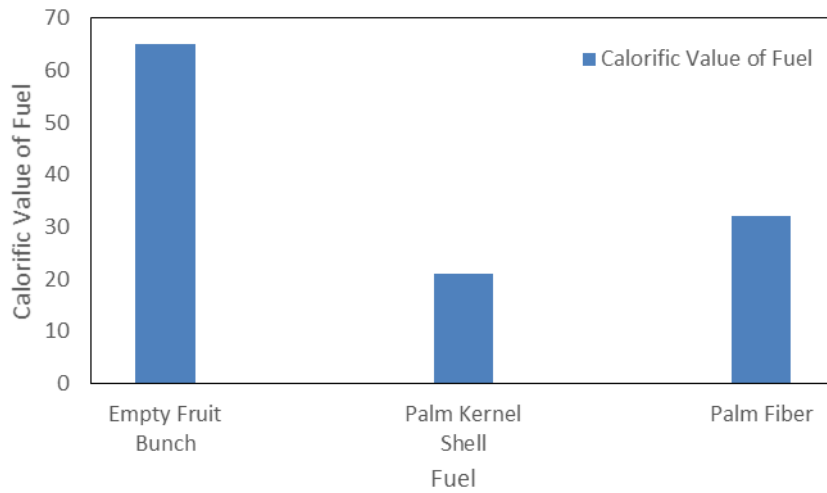

324
325
326 **Figure 7. Graph of the calorific values of the fuels from EFB, PKS, and PPF.**

327
328 **Table 3. The moisture content of the fuels from EFB, PKS, and PPF.**

Fuel	Moisture content (%)
Empty fruit bunch	65
Palm fiber	32
Palm kernel shell	21

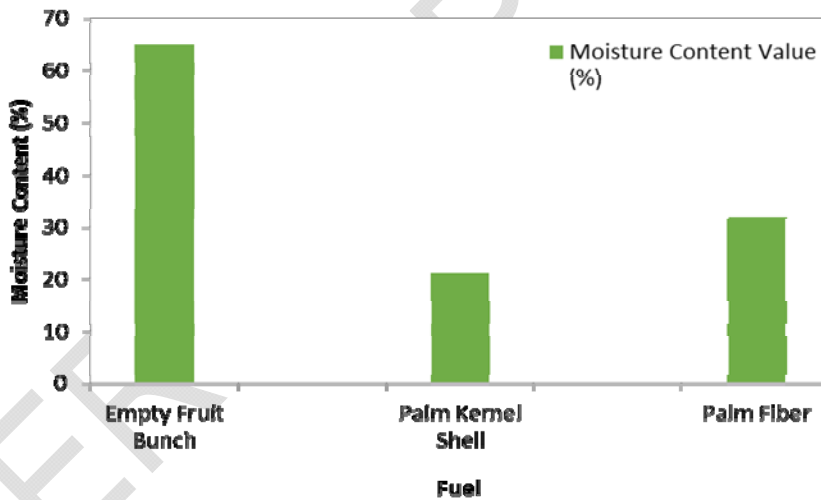

335
336
337 **Figure 8. Moisture content of the fuels from EFB, PKS, and PPF.**

338
339 **Table 4. Power generated by methane and EFB fuels.**

Mass of fuel (kg)	Power generated by methane (kW)	Power generated by EFB (kW)
100	511.507	187.565
200	1023.015	375.13
300	1534.523	562.7
400	2046.03	750.26
500	2557.54	937.83
600	3069.046	1125.4
700	3580.6	1312.9
800	4092.06	1500.52
900	4603.6	1688.1

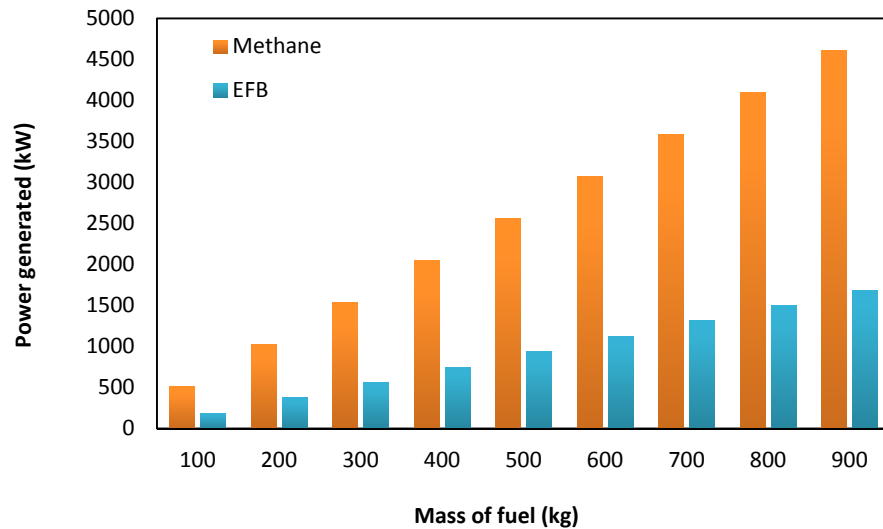


Figure 9. Graphical comparison between EFB and methane fuels.

4. CONCLUSION

Electricity is a social, economic necessity of a country. It is a major factor for the rapid development of any society and the transformation of any economy. The feasibility of using empty fruit bunch (EFB), an abundant renewable energy resource for the generation of electricity was investigated. The power plant used for this research is owned by PRESCO Nigeria Limited. The power generated using EFB and methane fuels were compared using different masses of fuel (in kg). From the study, 896kg of EFB produced 1.7MW of electricity when the steam boiler was used. Methane gas which produced electricity of 4.5 MW. This shows that EFB is a very good alternative for power generation. Based on the findings from the study, other agro-based biomass can also be studied for the generation of electricity using cogeneration plant.

REFERENCES

- Osaghae OJ. Potential biomass based electricity generation in a rural community in Nigeria. Master thesis, Department of Applied Physics and Mechanical Engineering. Division of Energy Engineering, Lulea University of Technology. 2009:1-25.
- Dimple E. Small-Scale Electricity Generation from Biomass, International J Sci Technol. 2011;5:43-46.
- Kate R, Deshmukh G, Tandale MS. Energy from biomass – a perspective under Indian conditions. Proc. of the International Symposium. Advances in Alternatives and Renewable Energy. Organised by University Technology Malaysia, Johor, Malaysia. 1997:63-69.
- WRM. World Rainforest Movement; Nigeria: Palm Oil deficit in a traditional Palm Oil Producing Country. 2001.
- Ghazali N F, Mahmood NABN, Ibrahim KA, Muhammad SAFS, Amalina NS. Electricity generation from palm oil tree empty fruit bunch (EFB) using dual chamber microbial fuel cell (MFC). IOP Conf. Series: Materials Science and Engineering 2017;206:012025.
- Abdullah N, Sulaiman F. The oil palm waste in Malaysia, International JSci Technol. 2013;2(5):839-846.
- MauludAL, SaidiH. The Malaysian Fifth Fuel Policy: Re-strategising the Malaysian Renewable Energy Initiatives, Energy Policy. 2012;48:88-92.
- AghamohammadiN, ReginaldSS, A Shamiri, ZinatizadehAAL, WongLP, SulaimanNMBN. An investigation of sustainable power generation from oil palm biomass, Chemical Engineering J. 2016;8:416.
- Hussain A, Ani FN, Darus AN. Thermo chemical behavior of empty fruit bunches and oil palm shells waste in circulating fluidized Bed combustor (CFBC), Journal of Oil Palm Research 2006;18:210-218.
- Energy Commission of Nigeria: 1st Energy Lecture Series. 2005

- 376 11. Vincent EN, Yusuf SD. (2014) Integrating Renewable Energy and Smart Grid Technology into the Nigerian Electricity
377 Grid System. *Smart Grid and Renewable Energy*, 5, 220-238.
- 378 12. UmikalsomMS, AriffAB, KarimMIA. Saccharification of pretreated oil palm empty fruit bunch fiber using cellulase of
379 *Chaetomium globosum*, *J Agric Food Chem*. 1998;46(8):3359–3364.
- 380 13. Han MH, Kim Y, Kim SW, Choi G-W. High efficiency bioethanol production from OPEFB using pilot pretreatment
381 reactor. *Journal of Chemical Technology and Biotechnology* 2011;86:1527-1534.
- 382 14. Misson M, Haron R, Kamaroddin MFA, Amin NAS. Pretreatment of empty palm fruit bunch for production of chemicals
383 via catalytic pyrolysis. *Bioresource Technology* 2009;100:2867–2873.
- 384 15. Geng A. (March 20th, 2013). Conversion of Oil Palm Empty Fruit Bunch to Biofuels, Liquid, Gaseous and Solid
385 Biofuels, Zhen Fang, IntechOpen, DOI: 10.5772/53043. Available from: [https://www.intechopen.com/books/liquid-](https://www.intechopen.com/books/liquid-gaseous-and-solid-biofuels-conversion-techniques/conversion-of-oil-palm-empty-fruit-bunch-to-biofuels)
386 [gaseous-and-solid-biofuels-conversion-techniques/conversion-of-oil-palm-empty-fruit-bunch-to-biofuels](https://www.intechopen.com/books/liquid-gaseous-and-solid-biofuels-conversion-techniques/conversion-of-oil-palm-empty-fruit-bunch-to-biofuels)
- 387 16. RoddyDJ, Manson-WhittonC, in *Comprehensive Renewable Energy*, 2012.
- 388 17. Zhang L, Bao Z, Xia S, Lu Q, Walters KB. Catalytic pyrolysis of biomass and polymer wastes. *Catalysts*, 2018;8:659.
- 389 18. PandeyA, *Biofuels: Alternative Feedstocks and Conversion Processes*, Biomass, Biofuels, Biochemicals, 1st Ed.,
390 2011
- 391 19. Ogi T, Nakanishi M, Fukuda Y, Matsumoto K. Gasification of oil palm residues (empty fruit bunch) in an entrained-flow
392 gasifier, *Fuel*. 2010.
- 393 20. van der SteltMJC, GerhauserH, KielJHA., KielJHA, PtasinskiK. Biomass upgrading by torrefaction for the production
394 of biofuels: a review, *Biomassand Bioenergy* 2011;35(9):3748-3762.
- 395 21. Uemura Y, Omar WN, Tsutsui T, Bt Yusup S. Torrefaction of oil palm wastes, *Fuel*. 2011;90:2585-2591.
- 396 22. OlisaP, KotingoKW. Utilization of palm empty fruit bunch (PEFB) as solid fuel for steam boiler, *European J Eng*
397 *Technol* 2014; 2(2).
- 398 23. Rajput RK. *Basic steam power cycle: Thermal engineering*. New Delhi: Laxmi. 2009.