

## 1 Parametric Investigation and Optimization of the Newly Developed Pant 2 Loading Ramp Machine 3 4

### 5 ABSTRACT

6 Objective of the current study was to optimize newly developed pant loading ramp to perform  
7 manual handling task. Pant loading ramp was 19 feet in length, having width of 2 feet, anti-  
8 slippery, easy to move due to provision of rotating wheels, adjustable at varying heights of  
9 the loading vehicle (between 2.5-5 feet) and reduces the loading time upto 30 minutes. For  
10 this purpose experiments were conducted on a group of 20 experienced manual handlers in  
11 rice mills of Udham Singh Nagar district, Uttarakhand, India. The reliability and validity of  
12 the developed, loading ramp was assessed by using response surface methodology in terms of  
13 change in energy expenditure (EE), rate of perceived exertion (RPE), total cardiac cost of  
14 work (TCCW) and grip strength (GS). Therefore RSM was applied to optimize the operating  
15 parameters of ramp such as load weight, height of ramp and time. As per Box Behenken  
16 design total 17 experiments were carried out each of which varied over three levels as load  
17 weight (40, 50 and 60 kg.), height of ramp (3, 4 and 5 feet), and time (3, 4 and 5 min.).  
18 ANOVA and coefficient of determination ( $R^2$ ) test were applied. In result it was observed  
19 that use of pant loading ramp was able to reduce EE of respondent's from 14.55 kJ/min. to  
20 11.41 kJ/min., RPE from 85.45 to 20 %, TCCW from 996.3 to 564.36 beats and GS from  
21 47.45 to 3.30 % with overall desirability of 0.84 %. In comparison with traditional  
22 method it was also found to reduce AWHR (14.55-11.41), PEE (16-12), RPE (85.45-20),  
23 GS (47.45-3.30) and TCCW (996.3-564.35). Relative advantages showed that more than 95  
24 % users were highly satisfied and found it advantageous.

25 Key-words: Musculoskeletal disorders ergonomics volume of oxygen uptake  
26  
27

## 28 INTRODUCTION

29 According to Genaidy *et al.* (2003) operations related to manual handling include the  
30 acts of lifting, lowering, carrying, pushing, pulling, and holding items. National Institute for  
31 Occupational Safety and Health, 1997 reported that when handling and lifting items  
32 manually, there is always potential for injuries such as strains, sprains, fractures, cuts, lower  
33 back pain due to awkward postures, muscle fatigue and MSD problems. Among the injuries  
34 reported in industry, MSD have been recognized as one of the leading problem. Besides these  
35 researches also shows a significant linkage between musculoskeletal injuries and manual  
36 handling (Edlich *et al.*, 2005; Hoozemans *et al.*, 1998). It is found that manual handling  
37 injuries are a major burden to society, organizations and the sufferers themselves and the  
38 financial costs are estimated to be in the region of £2 billion a year (Tudor, 1998).

39 Recent statistics from the Health and Safety Authority (2007) indicate that, approximately  
40 one third of all reported work-related incidents are triggered by manual handling. The  
41 proportion of incidents associated with manual handling is particularly high in the wholesale  
42 and retail trade (47 %), manufacturing (40 %) and health and social care (38 %). The most  
43 common type of injury in 2006 was 'physical stress or strain to the body' (41 %) and the  
44 most frequently injured body part was the back (24 %). Health and related occupations are  
45 ranked sixth in the 'top 10 occupations of workers injured' (Health and Safety Review,  
46 2007).

47 However workers in the rice mill industry have a high risk of musculoskeletal  
48 disorders because they are principally involved in MMH task. Although today the tasks or  
49 processes are being mechanized even then, many tasks are still performed manually in the  
50 rice mills and the worker were sufferings from hazards like, force, awkward postures, and  
51 repetitive motions that can lead to injuries, energy and time waste. Furthermore it was noted  
52 that rice mill workers were using the wooden plank for loading and unloading task which was

53 narrow, short, non static and slippery. It was adjusted on different loading vehicle by using a  
54 drum which takes approx 45 min of time period. To avoid these problems, need was felt to  
55 redesign and develop loading ramp ergonomically and to test its validity and reliability by  
56 using the response surface methodology (RSM). Thus the objectives of the present study  
57 were to verify the newly developed pant loading ramp by using the RSM statistical technique  
58 and to evaluate the relative advantages.

## 59 **MATERIALS AND METHODS**

60 In this study researcher observed the prevailing working environment and tool  
61 (wooden plank) for a period of 1 year that was used by the workers. Thereafter a need and  
62 scope was assessed for redesign and development of a new pant loading ramp. Thus newly  
63 developed pant loading ramp (length of 19 feet, width of 2 feet and adjustable between 2.5-5  
64 feet) was statistically tested by conducting the experiments of RSM technique and thereafter  
65 its acceptability was rated by taking the responses of workers. To fulfil this objective  
66 subjects were familiarized with the experimental procedure and some personal and  
67 physiological variables of the workers were also taken.

68 **Subjects:** A group of 20 male subjects were recruited. These workers met the following  
69 criteria a minimum of 5 year experience, age between 20-30 years, a low lifetime incidents of  
70 injuries, involve in loading and unloading of rice sacks and had a good physical fitness. All  
71 subjects were belonging to the very low socio-economic status and never received any  
72 ergonomic training.

73 **Locale:** Study was done in the rice mills of Rudrapur block; district Udham Singh Nagar,  
74 Uttarakhand, India.

75 **Response surface methodology (RSM) analysis through box behenkan experiment**  
76 **design**

77 Response surface methodology (RSM) is a collection of mathematical and statistical  
 78 techniques for empirical model building by careful design of experiments (Sampaio *et al.*,  
 79 2006). The objective of it's to optimize a response (output variable) which is influenced by  
 80 several independent variables (input variables) (Alvares, 2000), (Natarajan *et al.*, 2011).  
 81 Hence, RSM technique was applied to test the efficacy of developed pant loading ramp in  
 82 terms of energy expenditure (EE), rate of perceived exertion (RPE), total cardiac cost of work  
 83 (TCCW) and grip strength (GS). Thus to conducting RSM analysis of the loading ramp, the  
 84 selected process variables (load weight, height of ramp and time) were varied up to three  
 85 levels. Load weight varied as 40, 50 and 60 kg., height of the ramp as 3, 4 and 5 feet and  
 86 time was also varied as 3, 4, and 5 min. (Table 2). The Box Behenken design was used for  
 87 modelling of experiments, where total seventeen experiments were conducted (Table 5).

88 The selected responses were energy expenditure (EE), total cardiac cost of work  
 89 (TCCW), rate of perceived exertion (RPE) and grip strength (GS) (Table. 3). Optimization  
 90 experiments were designed with the help of design expert 8.06 software. Besides this surfur  
 91 software 9.0 was also employed for the graphical optimization of the multiple responses. The  
 92 table, 1, 2, 3 and 4 showed the selected parameters of the study as constant, independent,  
 93 dependent and process variables with their levels.

94 **Table 1: Constant parameters for optimization**

SI. no.	Parameters	Value/name
1	Back loading	-
2	Ramp length (16)	Feet

95 **Table 2: Independent variables for optimization**

SI. No.	Parameter	Level	Range
1	Load weight (kilogram)	3	40, 50, 60
2	Height (feet)	3	3, 4, 5
3	Time (minute)	3	3, 4, 5

96  
 97 **Design of experiment**

98 Design of experiment is required to extract meaningful conclusions from the  
 99 measured responses Therefore, the experimental design was performed with the help of  
 100 design expert 8.06 software and brainstorming approach as shown in Table 4 and 5.

101 **Table 3: Dependent variables for optimization**

Sl. No.	Parameter	Value/name
1	EE (Energy Expenditure)	kJ/min.
2	RPE (Rate of Perceived Exertion)	%age
3	TCCW (Total Cardiac Cost of Work)	Beats
4	GS (Grip Strength)	%age

102

103 **Table 4: Process variable and their levels**

Independent variable	Code	Codes level		
		-1	0	1
Name		Actual level		
Load weight (kilogram)	X <sub>1</sub>	40	50	60
Height of ramp (feet)	X <sub>2</sub>	3	4	5
Time (minute)	X <sub>3</sub>	3	4	5

104

105 **Table 5: Experimental designs**

Std	Run	Factor X <sub>1</sub> Load weight (kg.)	Factor X <sub>2</sub> Height of ramp (feet)	Factor X <sub>3</sub> Time (minute)
1	17	-1.00	-1.00	0.00
2	14	1.00	-1.00	0.00
3	6	-1.00	1.00	0.00
4	13	1.00	1.00	0.00
5	15	-1.00	0.00	-1.00
6	16	1.00	0.00	-1.00
7	2	-1.00	0.00	1.00
8	7	1.00	0.00	1.00
9	1	0.00	-1.00	-1.00
10	3	0.00	1.00	-1.00
11	10	0.00	-1.00	1.00
12	8	0.00	1.00	1.00
13	9	0.00	0.00	0.00
14	5	0.00	0.00	0.00
15	11	0.00	0.00	0.00
16	12	0.00	0.00	0.00
17	4	0.00	0.00	0.00

106 **Coded value (CV):**  $\frac{x - \text{mid value (centre point)}}{\text{Difference (internal gap)}}$  Eqn. 1

107 **Eqn. 1 showed about the method of calculating coded value**

108 Besides response surface methodology, comparative performance evaluation and relative  
 109 advantages of pant loading ramp was also assessed by using a developed interview schedule.

110

## 111 RESULTS AND DISCUSSION

### 112 General characteristics of selected rice mill workers

113 The general characteristics of selected workers for the RSM experiments revealed that  
114 the mean±SD of age, height, body weight, body mass index of workers were calculated as  
115 29.03±4.23 years, 162±12.67 cm., 53.65±9.28 kg, and 20.84 ±3.41. The mean±SD of aerobic  
116 capacity based on heart rate, BP, pulse rate and body temperature was 39.45 ±5.67 L/min.,  
117 117.53/72.15±12/8.4 (systolic/diastolic), 76.54±7.56 beats/min. and 96.50 ±2.6<sup>0</sup>F. Calculated  
118 MSD rate was 85.45% by using Nordic questionnaire (Kuroinka *et al.*, 1987).

### 119 Design and development of pant loading ramp

120 On the basis of need assessment pant loading ramp made up of wood and aluminium  
121 sheet (small hole mounted on sheet) was ergonomically designed and developed to reduce the  
122 drudgery. It was 19 feet in length, having width of 1.5 feet, anti-slippery, easy to move due to  
123 provision of rotating wheels, adjustable at varying heights of the loading vehicle (between  
124 2.5-5 feet) and reduces the loading time upto 30 minutes. Finally it was found that the  
125 designing of loading ramp reduces the preparation time and give maximum output with  
126 minimum time (Plate 1). In terms of tool designing, Koivunen (1994) reported that the  
127 redesign of the tool must base on the problem analysis and user-centered design (Kardborn,  
128 1998; Eason, 1994; Pheasant, 1996; Kardborn, 1998) that also provide a good basis for  
129 judgement (Sperling *et al.*, 1993; Kumar, 1994).

### 130 Optimization of process parameters using response surface methodology (RSM)

131 In this study the RSM was applied to optimize the operating parameters (load  
132 weight, height of ramp and time) considered during the experiment. ANOVA test was  
133 applied to evaluate the adequacy (by applying the lack-of-fit test) of different models and to  
134 evaluate the statistical significance of the factors in the model. In order to examine the  
135 goodness and evaluate the adequacy of a fitted model, the coefficient of determination ( $R^2$ )

136 was calculated. The surfer software 9.0 was employed for the graphical optimization;  
 137 similar techniques were also reported by Pishgar *et al.* (2012).

138



139

140

141

**Front View**

**Internal view**

**Top view**

**Side view**

142

**Plate 1: Different views of improved loading ramp**

143

**Development of second order model**

144

145 A complete second mathematical model (Eqn 1) was fitted to the data and adequacy  
 146 of the model was tested considering the coefficient of multiple determinations ( $R^2$ ), fisher's  
 147 F-test and lack of fit. The model was used to interpret the effect of load weight, ramp height  
 148 and time of load carrying on back on various response (Table 6) energy expenditure (EE),  
 149 rate of perceived exertion (RPE), total cardiac cost of work (TCCW) and grip strength (GS).

150 The second order mathematical response function for three independent variables has the  
 151 following general form:

$$y = B_0 \sum_{i=1}^3 B_i \times i + \sum_{i=1}^2 \sum_{j=i+1}^3 B_{ij} \times i \times j + \sum_{i=1}^3 B_{ii} \times i^2 \quad \text{Eqn. 1}$$

152 Experimental data were analyzed by employing multiple regression technique to  
 153 develop response functions and variable parameters were optimized for the best outputs. The  
 154 regression coefficient of the complete second order model and their significance has been  
 155 reported (Table 7). High P value indicated that a model had a significant lack of fit and  
 156 therefore considered to be inadequate. The lower the value of P, better would be model thus  
 157 model having P value lower than 0.1 were accepted.

158 **Table 6: Experiment data for various responses from RSM technique**

Std	Run	Factor X <sub>1</sub>	Factor X <sub>2</sub>	Factor X <sub>3</sub>	Response 1	Response 2	Response 3	Response 4
		Load weight (kilogram)	Height (feet)	Time (minute)	EE (kJ/min.)	RPE (percent)	TCCW (beats)	Grip strength (percent)
1	17	-1	-1	0	10.86	30	676.65	3.22
2	14	1	-1	0	11.35	50	700	7.16
3	6	-1	1	0	10.99	30	536	5.34
4	13	1	1	0	11.65	50	594.04	6
5	15	-1	0	-1	11.63	20	553	5
6	16	1	0	-1	12	45	586.61	5.14
7	2	-1	0	1	11.47	30	796	4
8	7	1	0	1	12.2	40	920.5	6.21
9	1	0	-1	-1	11.81	30	532.84	4.3
10	3	0	1	-1	11.49	45	622.48	6.12
11	10	0	-1	1	11.36	40	746	4.24
12	8	0	1	1	12.96	45	1034.5	7.12
13	9	0	0	0	10.91	40	689.5	5.83
14	5	0	0	0	10.99	45	696	6.45
15	11	0	0	0	11.47	40	715	6
16	12	0	0	0	11.5	45	709	5.57
17	4	0	0	0	10.91	45	689.5	5.6

159

160 **Table 7: Result of regression analysis for responses from RSM technique**

Source	Energy expenditure (kJ/min.)		Rate of perceived exertion (percent)		Total cardiac cost of work (beats)		Grip strength (percent)	
	Coefficient	P value	Coefficient	P value	Coefficient	P value	Coefficient	P value
<b>Model</b>	11.156	0.0172	43	0.0035	699.8	0.0552	5.89	0.0387
<b>X<sub>1</sub></b>	0.28125	0.0276	9.375	0.0001	29.9375	0.3514	0.86875	0.0071
<b>X<sub>2</sub></b>	0.21375	0.0731	2.5	0.0838	16.44125	0.6005	0.7075	0.0183
<b>X<sub>3</sub></b>	0.1325	0.2328	1.875	0.1746	150.25875	0.0015	0.12625	0.6019
<b>X<sub>1</sub>, X<sub>2</sub></b>	0.0425	0.7756	0	1.0000	8.6725	0.8438	-0.82	0.0405
<b>X<sub>1</sub>, X<sub>3</sub></b>	0.09	0.5503	-3.75	0.0700	22.7225	0.6087	0.5175	0.1574
<b>X<sub>2</sub>, X<sub>3</sub></b>	0.48	0.0123	-2.5	0.1973	49.715	0.2794	0.265	0.4442
<b>X<sub>1,2</sub></b>	-0.01175	0.9354	-4.625	0.0305	-46.5275	0.2974	-0.40875	0.2403
<b>X<sub>2,2</sub></b>	0.06825	0.6404	1.625	0.3738	-26.6	0.5404	-0.05125	0.8767
<b>X<sub>3,2</sub></b>	0.68075	0.0018	-4.625	0.0305	60.755	0.1851	-0.39375	0.2564
<b>R<sup>2</sup></b>	0.8768		0.9246		0.8194		0.8398	
<b>F Value</b>	<b>5.54</b>		9.54		<b>3.53</b>		4.08	
<b>Lack of fit</b>	NS		NS		S		NS	

161

162 **Effect of independent variables on different responses**

163 By response surface methodology, a complete realization of the process parameters and their  
 164 effects were achieved under following heads:

165 **Effect of load weight, height and time on energy expenditure (EE)**

166 Significance of independent variable i.e. load weight, height and time on EE data was tested  
 167 using ANOVA (Table 8) and total effect on EE was observed (Table 9). Contour plot Fig. 1

168 A1 depicting the effect of load weight and height on EE, it was observed that EE was found  
 169 to be increased in linear pattern with the both i.e. ramp height and load weight. Fig. 1 A2  
 170 shows the effect of load weight and time on EE, it was observed that only time, affects the EE  
 171 parameters. Whereas Fig. 1 A3 shows the effect of ramp height and time on EE, it was  
 172 observed that only time affects the EE of human.

173 **Table 8: ANOVA for energy expenditure (EE) during experiment**

Source	df	Sum of square	Mean of square	F Value
Model	9	4.10	0.46	5.54**
Linear	3	1.14	0.38	4.63***
Quadratic	3	0.95	0.31	3.89*
Interactive	3	1.97	0.65	8.01**
Error	7	0.58	0.082	
Total	16	4.64		

174 \*\*\*, \*\*, \* significant at 1, 5 and 10 % level of significance respectively; F tab value (9,7) = 6.71; F tab value  
 175 (3,7) = 8.45 (1%); (3,7) = 4.34 (5%); F tab value (9, 7) =2.72; F tab value (3,7) = 3.07 (10%)  
 176

177 **Table 9: Total effect of individual parameter on energy expenditure (EE) experiment**

Source	df	Sum of square	Mean of square	F Value
Model	9	4.10	0.46	5.54**
Load weight (x <sub>1</sub> )	4	0.66	0.16	2.04
Height (x <sub>2</sub> )	4	1.31	0.32	4.01*
Time (x <sub>3</sub> )	4	3.04	0.76	9.27***
Error	7	0.58	0.082	
Total	19	5.59		

178 \*\*\*, \*\*, \* significant at 1, 5 and 10 % level of significance respectively; F tab value (9,7) = 6.71; F tab value  
 179 (4,7) = 7.84 (1%); F tab value (9, 7) = 3.67 ; F tab value (4,7) = 4.12 (5%); F tab value (9, 7) =2.72; F tab value  
 180 (4,7) = 2.96 (10%)  
 181

182 **Effect of load weight, height and time on rate of perceived exertion (RPE)**

183 Significance of independent variable i.e. load weight, height and time on RPE data was tested  
 184 using ANOVA (Table 10) and total effect on EE was observed (Table 11). Contour plot Fig.  
 185 2 A1 depicted the effect of load weight and height on RPE, it was observed that RPE was  
 186 found to be increased in linear pattern with the both i.e. ramp height and load weight. From  
 187 Fig. 2 A2, which shows the effect of load weight and time on RPE, it was observed that only  
 188 load weight affects the RPE parameters. Whereas Fig. 2 A3 shows the effect of ramp height

189 and time on RPE, it was shows that a minimum region at center which is called as saddle  
 190 point and shows that there is no effect of height and time on RPE.

191 **Table 10: ANOVA for rate of perceived exertion (RPE) during experiment**

Source	df	Sum of square	Mean of square	F Value
Model	9	1057.86	117.54	9.53***
Linear	3	781.24	260.41	21.14***
Quadratic	3	81.25	27.08	2.19
Interactive	3	191.23	63.74	5.17**
Error	7	86.25	12.32	
Total	16	1139.97		

192 \*\*\*, \*\*, \* significant at 1, 5 and 10 % level of significance respectively; F tab value (9,7) = 6.71; F tab value  
 193 (3,7) = 8.45 (1%); F tab value (9, 7) = 3.67; F tab value (3,7) = 4.34 (5%)  
 194 F tab value (9, 7) = 2.72; F tab value (3,7) = 3.07 (10%)  
 195

196 **Table 11: Total effect of individual parameter on perceived exertion (RPE) experiment**

Source	df	Sum of square	Mean of square	F Value
<b>Model</b>	9	1057.86	117.54	9.53***
Load weight ( $x_1$ )	4	849.43	212.35	17.24***
Height ( $x_2$ )	4	86.11	21.52	1.75
Time ( $x_3$ )	4	199.43	49.85	4.05*
Error	7	86.25	12.32	
Total	19	1221.22		

197 \*\*\*, \*\*, \* significant at 1, 5 and 10 % level of significance respectively; F tab value (9,7) = 6.71; F tab value  
 198 (4,7) = 7.84 (1%); F tab value (9, 7) = 3.67; F tab value (4, 7) = 4.12 (5%); F tab value (9, 7) = 2.72; F tab value  
 199 (4, 7) = 2.96 (10%)  
 200


201 **Effect of load weight, height and time on total cardiac cost of work (TCCW)**

202 Significance of independent variable i.e. load weight, height and time on TCCW data was  
 203 tested using ANOVA (Table 12) and total effect on EE was observed (Table 13). Fig. 3 A1 of  
 204 contour plot depicting the effect of load weight and height on TCCW, it was observed that  
 205 TCCW was minimum affected by the height of the ramp and only load weight affects the  
 206 individuals TCCW. Fig. 3 A2 shows the effect of load weight and time on TCCW, it was  
 207 observed that only time affects the TCCW parameters. Whereas Fig 3 A3 shows a minimum  
 208 region at centre which is called as saddle point and showed that there is no effect of height  
 209 and time on TCCW.


210

211


212

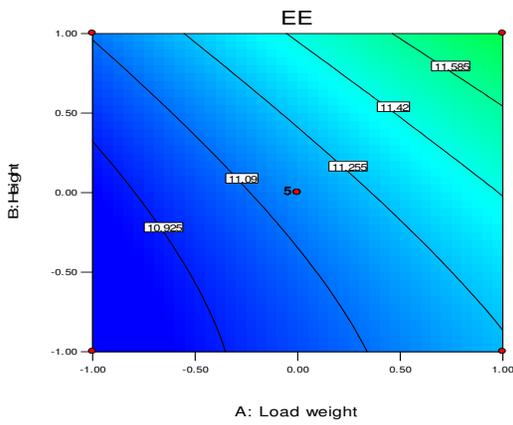


A1: Effect of loadweight and height on EE

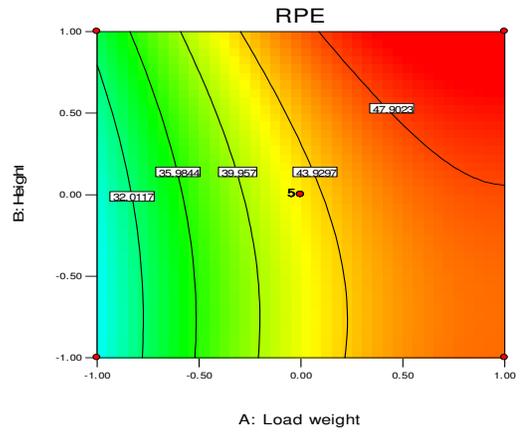


A1: Effect of loadweight and height on RPE

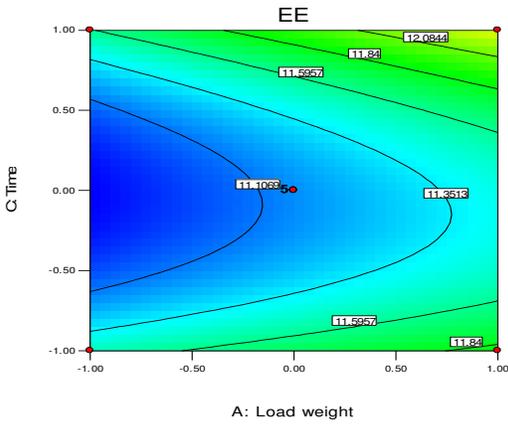


A2: Effect of load weight and time on EE

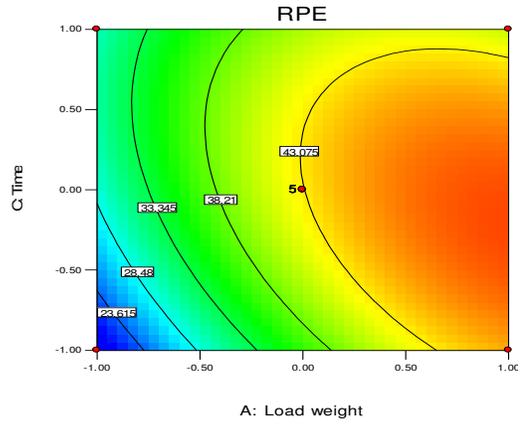

A2: Effect of load weight and time on RPE

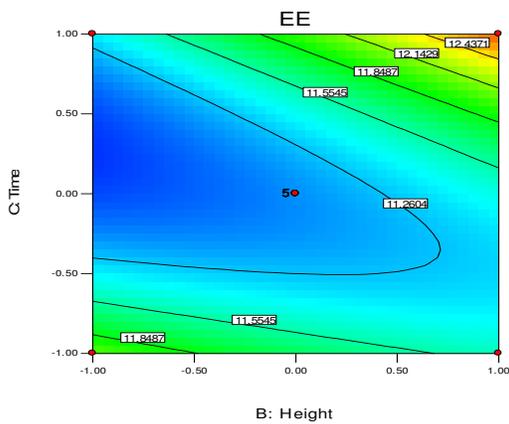

A3: Effect of height and time on EE

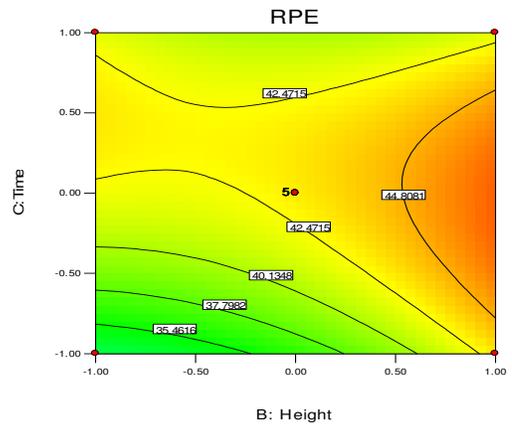


A3: Effect of height and time on RPE


Fig. 1: Contour plots for Energy Expenditure (EE) during experiment

Fig. 2: Contour plots for Rate of Perceived Exertion (RPE) during experiment


213

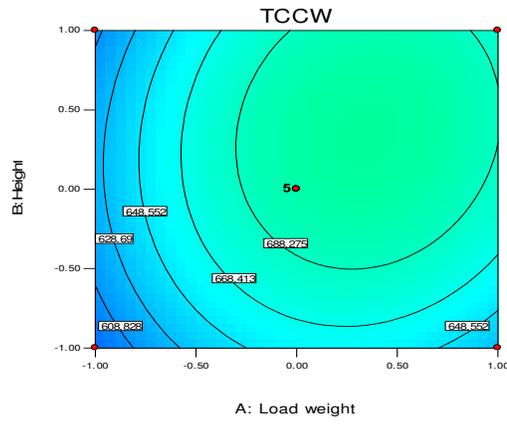


A1: Effect of load weight and height on TCCW

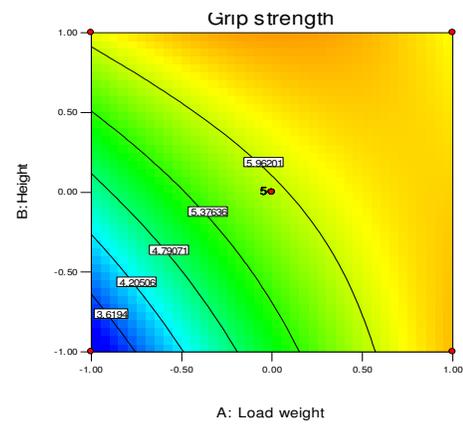


A1: Effect of load weight and height on GS

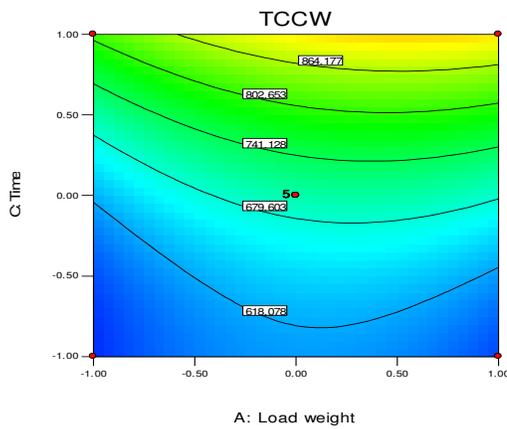


A2: Effect of load weight and time on TCCW

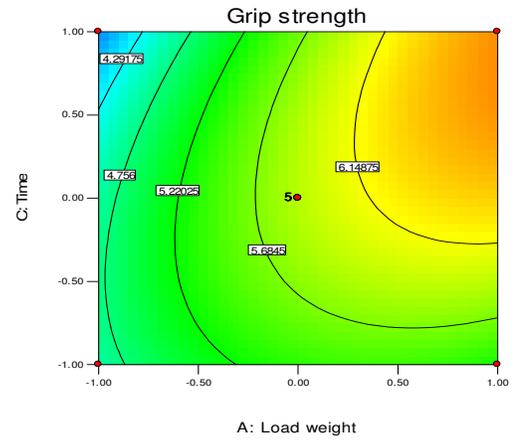

A2: Effect of load weight and time on GS

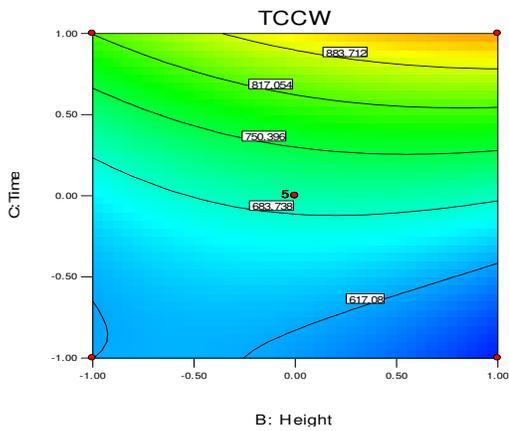

A3: Effect of height and time on TCCW

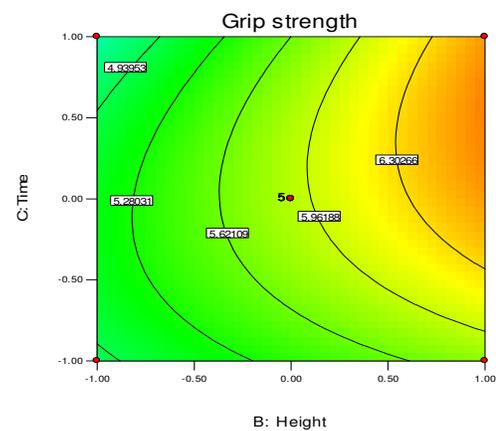

A3: Effect of height and time on GS

Fig. 3: Contour plots for total cardiac cost of work (TCCW) during experiment

Fig. 4. Contour plots for grip strength (GS) during experiment

214 **Table 12: ANOVA for total cardiac cost of work (TCCW) during experiment**

Source	df	Sum of square	Mean of square	F Value
Model	9	228496.67	15388.51	3.52
Linear	3	189954.07	63318.02	8.80***
Quadratic	3	12252.4	4084.13	0.57
Interactive	3	27635.74	9211.91	1.28
Error	7	50358.60	7194.08	
Total	16	280200.8		

215 \*\*\*, \*\*, \* significant at 1, 5 and 10 % level of significance respectively; F tab value (9, 7) = 6.71; F tab value  
 216 (3, 7) = 8.45 (1%); F tab value (9, 7) = 3.67; F tab value (3, 7) = 4.34 (5%); F tab value (9, 7) = 2.72; F tab value  
 217 (3, 7) = 3.07 (10%)  
 218

219 **Table 13: Total effect of individual parameter on total cardiac cost of work (TCCW)**  
 220 **experiment**

Source	df	Sum of square	Mean of square	F Value
<b>Model</b>	9	228496.67	15388.51	3.52
Load weight ( $x_1$ )	4	1865	4662.77	0.65
Height ( $x_2$ )	4	15328.87	3832.21	0.53
Time ( $x_3$ )	4	208114.8	52028.71	7.23**
Error	7	50358.60	7194.08	
Total	19	275667.3		

221 \*\*\*, \*\*, \* significant at 1, 5 and 10 % level of significance respectively; F tab value (9,7) = 6.71; F tab value  
 222 (4,7) = 7.84 (1%); F tab value (9, 7) = 3.67; F tab value (4,7) = 4.12 (5%); F tab value (9, 7) = 2.72; F tab value  
 223 (4,7) = 2.96 (10%)  
 224

225 **Effect of load weight, height and time on grip strength (GS)**

226 Significance of independent variable i.e. loads weight, height and time on grip strength data  
 227 was tested using ANOVA (Table 14) and total effect of individual parameters was also  
 228 observed (Table 15). Contour plot Fig. 4 A1 depicting the effect of load weight and height on  
 229 grip strength at centre point and it shows that grip strength was increased with load weight  
 230 rather than height. Whereas Fig 4 A2, also showed the effect of load weight and time on grip  
 231 strength at centre point and it shows that grip strength was increased with load weight rather  
 232 than time. Fig 4 A3 shows the effect of time and ramp height on grip strength, it was  
 233 observed that only height affects the grip strength rather than time.

234

235 **Table 14: ANOVA for grip strength (GS) during experiment**

Source	df	Sum of square	Mean of square	F Value
Model	9	15.68	1.74	4.07**
Linear	3	10.15	3.38	8.05**
Quadratic	3	4.03	1.34	3.20*
Interactive	3	1.36	0.45	1.08
Error	7	2.99	0.42	
Total	16	18.53		

236 \*\*\*, \*\*, \* significant at 1, 5 and 10 % level of significance respectively; F tab value (9,7) = 6.71; F tab value  
 237 (3,7) = 8.45 (1%); F tab value (9, 7) = 3.67; F tab value (3, 7) = 4.34 (5%); F tab value (9, 7) =2.72; F tab value  
 238 (3, 7) = 3.07 (10%)  
 239

240 **Table 15: Total effect of individual parameter on grip strength experiment**

Source	df	Sum of square	Mean of square	F Value
<b>Model</b>	9	15.68	1.74	4.07**
Load weight ( $x_1$ )	4	10.48	2.62	6.23**
Height ( $x_2$ )	4	7.61	1.90	4.52**
Time ( $x_3$ )	4	2.12	0.53	1.26
Error	7	2.99	0.42	
Total	19	23.2		

241 \*\*\*, \*\*, \* significant at 1, 5 and 10 % level of significance respectively; F tab value (9,7) = 6.71; F tab value  
 242 (4,7) = 7.84 (1%); F tab value (9, 7) = 3.67; F tab value (4,7) = 4.12 (5%); F tab value (9, 7) =2.72; F tab value  
 243 (4,7) = 2.96 (10%)  
 244

245 **Optimization of parameters (load weight, height and time) for described responses**

246 Numerical optimization was carried out using design software. The goal was fixed to  
 247 minimize heart rate, energy expenditure and musculoskeletal disorder. The responses i.e.  
 248 energy expenditure (EE), rate of perceived exertion (RPE), total cardiac cost of work  
 249 (TCCW) and grip strength (GS) were taken into consideration for optimization. The goal  
 250 seeking begins at a random starting point and proceeds up and down the steepest slope on  
 251 the response surface for a maximum and minimum value of the response respectively.  
 252 Importance to the responses and independent variables were given on the basis of the  
 253 objective of the study. Maximum importance was (+++++) was given to time and EE,  
 254 next importance were given to the TCCW (+++++) RPE and GS, while the goal of load  
 255 weight and height (+++) was kept at in range similar study was also reported by Rai *et al.*  
 256 (2012). The goal setup and optimum value of different parameters obtained is given in  
 257 Table 16.

258 **Table 16: Constraints for optimization of parameters**

Name	Goal	Lower Limit	Upper limit	Goal setting
Load weight	in range	-1	1	+++
Ramp height	in range	-1	1	+++
Time	minimum	-1	1	+++++
Energy expenditure (EE)	minimum	-1	1	+++++
Rate of perceived exertion (RPE)	minimum	-1	1	++++
Total cardiac cost of work (TCCW)	minimum	-1	1	++++
Grip strength (GS)	minimum	-1	1	++++

259

260 **Table 17: Optimum values of parameters for experimentation of loading ramp**

Value	Load weight (kg.)	Height (feet)	Time (minutes)	EE (kJ/min.)	RPE (%)	TCCW (beats)	Grip strength (%)	Desirability
<b>Coded</b>	-1	-1	-0.71					
<b>Actual</b>	40	3	3.29	11.41	20.00	564.36	3.30	0.84

261

262 During optimization 17 solution were obtained, out of which the most suitable  
 263 criteria, was selected. The selected solution was tested for the actual conditions and it was  
 264 observed out of three independent variable optimum results were obtained when the load  
 265 weight 40 kg., height 3 feet and time 3.29 minute (Table 17) which shows the reduction of  
 266 energy expenditure from 14.55 kJ/min. to 11.41 kJ/min., RPE from 85.45 to 20 %, TCCW  
 267 from 996.3 to 564.36 beats and GS from 47.45 to 3.30 % with overall desirability of 0.84  
 268 %. Hence, this combination shows the maximum efficiency with minimum time, energy,  
 269 TCCW and grip strength by working with loading ramp. Similarly Pandey and Vinay  
 270 (2016) in a study of RSM on use of pant loading ramp reported that it was able to reduce  
 271 heart rate of selected respondent's from 135.4 beats/min. to 126.76 beats/min., MSD from  
 272 85.45 to 22.80 % and VO2 max from 39.45 to 34L/min.


273 **Comparative performance of the pant loading ramp and existing wooden plank.**

274 Use of developed loading ramp was able to reduce average energy expenditure of selected  
 275 respondents from 14.55±3.12 to 11.41±1.10 kJ/min., peak energy expenditure from

276 16±1.36 to 12±0.32 kJ/min., rate of perceived exertion from 85.45±8.43 to 20±2.1 %, grip  
 277 strength from 47.45±2.14 to 3.30±0.27 % and TCCW from 996.3±5.45 to  
 278 564.36±3.41beats. It means the energetic workload and perceived discomfort of the  
 279 respondents in different body regions differ significantly for the use of both traditional  
 280 and developed loading ramp.

281 **Table 18: Comparative evaluation of pant loading ramp and existing wooden plank**

S. No.	Physiological parameters	Wooden plank (Mean±SD)	Pant Loading ramp (Mean±SD)
1	Average Energy Expenditure (AWHR) (kJ/min)	14.55±3.12	11.41±1.10
2	Peak Energy Expenditure (PEE) (kJ/min.)	16±1.36	12±0.32
3	Rate of Perceived Exertion (RPE) (%)	85.45±8.43	20±2.1
4	Grip Strength (GS) (%)	47.45±2.14	3.30±0.27
5	Total cardiac cost of work (TCCW) (Beats)	996.3±5.45	564.36±3.41

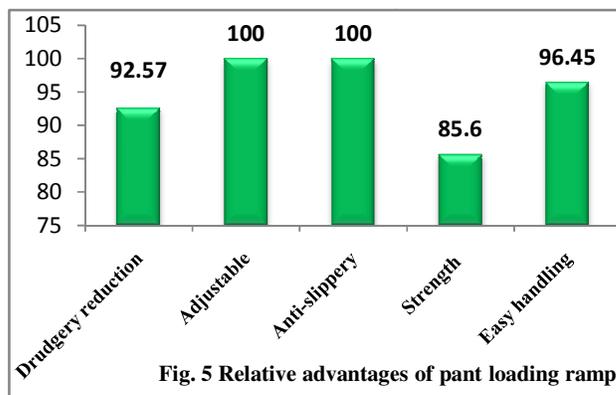

282

283 **Relative advantage regarding pant loading ramp**

284 Relative advantages of pant loading ramp was evaluated on the basis of five  
 285 parameter and the figure below depicted that 92.57 % respondents were satisfied with the  
 286 drudgery reduction concept of ramp and all the respondents were believed that the improved  
 287 loading ramp was adjustable and anti-slippery. While, 85.6 % workers were satisfied that the  
 288 strength of loading ramp was good. Furthermore 96.45 % respondents revealed that ramp was  
 289 very easy to handle from one place to another because of light weight and provision of  
 290 rotating wheel.

291

292



293 **CONCLUSION**

294 The machine efficiency of a new loading ramp was found optimum on having a  
295 height 3 feet mm, time 3.29 minutes and load weight of 40 kg leads to the EE i.e. 11.41  
296 kJ/min. with RPE of 20 %, TCCW 564.36 beats and GS 3.30% with overall desirability  
297 were found to be 0.84 %. Hence, this combination shows the maximum efficiency with  
298 minimum time, energy and psychophysical discomfort was obtained by loading ramp.



299 **REFERENCES**

- 300 Alvarez, L.E. (2000). Approximation model building for design optimization using the RSM  
301 and genetic programming, Ph.D. thesis, department of civil and environmental  
302 engineering, university of Bradford, UK. 2000.
- 303 Astrand, P. and Rodahl, K. (1977). Textbook of work physiology (2<sup>nd</sup> edition). McGraw Hill,  
304 New York 292p.
- 305 Edlich, R.F., Hudson, M.A., Buschbacher, R.M., Winters, K.L., Britt, L.D., Cox, M.J.,  
306 Becker, D.G., McLaughlin, J.K., Gubler, K.D. and Zomerschoe, T.S. et al. (2005).  
307 Devastating injuries in healthcare workers: Description of the crisis and legislative  
308 solution to the epidemic of back injury from patient lifting. *Journal of Long Term*  
309 *Effects of Medical Implants*, 15: 225-241.
- 310 Grandjean, E. (1982). Fitting the task to the man – an ergonomic approach, Taylor and  
311 Francis, London.
- 312 Health and Safety Authority. (2007). HSA summary of injury illness and fatality statistics  
313 2005-2006.
- 314 Hoozemans, M.J., van der B, A.J., Frings, D.M.H., van Dijk, F.J. and van der Woude, L.H.  
315 (1998). Pushing and pulling in relation to musculoskeletal disorders: A review of risk  
316 factors. *Journal of Ergonomics*, 41: 757-781.

- 317 ICMR. (1969). Cited in Raguvanshi P. and Vinay D. 2012. Occupational health hazards of  
318 public transport operator. Unpublished Ph.D. thesis, Department of Family Resource  
319 Management, GBPUA&T, Pantnagr, Uttarakhand, India.
- 320 Kardborn, A. (1998). Inter-organizational participation and user focus in a large-scale product  
321 development programme: The Swedish hand tool project. *International Journal of*  
322 *Industrial Ergonomisc*, 21: 369-381.
- 323 Koivunen, M.R. (1994). Actor Tools: tools for user interface modelling, developing and  
324 analysis. Acta Polytechnica Scandinavica, Mathematics and Computing in Engineering  
325 Design, 69, Helsinki.
- 326 Kroemer, K.H.E. (1992). Personnel training for safer material handling. *Journal of*  
327 *Ergonomics*, 35: 1119-1134.
- 328 Kumar, S. (1994). A conceptual model of overexertion, safety and risk of injury in  
329 occupational settings. *Human Factors*, 36: 197-209.
- 330 Kuorinka, A. *et al.* (1987). Participation in workplace design with reference to low back pain:  
331 a case for the improvement of the police patrol car. *Ergonomics*, 37 (7):1131-1136.
- 332 Natarajan, U., Periyanan, P.R. and Yang, S.H. (2011). Multiple-response optimization for  
333 microend milling process using response surface methodology. *The international*  
334 *Journal of advanced Manufacturing Technology*, 56 (1-4) 177.
- 335 Pandey, K. And Vinay, D. (2016). Optimization of the process parameters in rice mill using  
336 response surface methodology (RSM). *Journal of Applied and Natural Science* 8 (3):  
337 1267 – 1277.
- 338 Pheasant, S.T. (1996). Body space: anthropometry, ergonomics and design of work, 2<sup>nd</sup>  
339 edition, Taylor & Francis, London.
- 340 Pishgar S.H. Komleh, Keyhan I.A., Mostofi, M.R., Sarkariand, A. and Jafari (2012).  
341 Application of Response Surface Methodology for Optimization of Picker-Husker

- 342 Harvesting Losses in Corn Seed. *Iranica Journal of Energy & Environment* 3 (2): 134-  
343 142.
- 344 Rai, A. (2012). Ergonomic evaluation of conventional and improved methods of aonal  
345 priking. Unpublished M.Sc. Thesis, Deptt. of Family Resource Management, CCS  
346 Haryana Agriculture University Hisar, India.
- 347 Sampaio, F.C., Defaveri, D., Mantovani, H.C., Passos, F.M.L., Perego, P. and Converti, A.  
348 (2006). Use of response surface methodology for optimization of xylitol production by  
349 the new yeast strain debaryomyces hansenii UFV-170. *Journal of Food Engineering*,  
350 76: 376-86.
- 351 Singh, S.P., Mathur, P. and Rthore, M. (2007). Weeders for drudgery reduction of women  
352 farm workers. *Indian Journal of Agricultural Engineering*, 44 (3): 33-38.
- 353 Sperling, L., Dahlman, S., Wikström, L., Kilbom, Å. and Kadefors, R. (1993). A cube model  
354 for the classification of work with hand tools and the formulation of functional  
355 requirements. *Journal of Applied Ergonomics*, 24 (3): 212-230.
- 356 Tudor, O. (1998). The hidden workplace epidemics. TUC Organisation and Services  
357 Department.
- 358 Varghese, M.A., Bhatnagar, A. and Saha, P.N. (1996). Ergonomics research on women in  
359 India, Amonograph, Department of Family Resource Management, Post Graduate  
360 Studies and Research in Home Science SNTD Women's University, Bombay.
- 361 Singh, S.P., Mathur, P. and Rthore, M. 2007. Weeders for drudgery reduction of women farm  
362 workers. *Indian Journal of Agricultural Engineering*, 44 (3): 33-38.
- 363 Sperling, L., Dahlman, S., Wikström, L., Kilbom, Å. and Kadefors, R. 1993. A cube model  
364 for the classification of work with hand tools and the formulation of functional  
365 requirements. *Journal of Applied Ergonomics*, 24 (3): 212-230.

366 Tudor, O. 1998. The hidden workplace epidemics. TUC Organisation and Services  
367 Department.

368 Varghese, M.A., Bhatnagar, A. and Saha, P.N. 1996. Ergonomics research on women in  
369 India, Amonograph, Department of Family Resource Management, Post Graduate  
370 Studies and Research in Home Science SNDT Women's University, Bombay.