

**Original research article**  
**MODELS DESIGNED TO INCREASE THE WORK  
 OF REVERSIBLE DISC PLOW**

**Abstract**

In this paper we study the models designed to increase the work of reversible disc plow. Results of research on use of design-engineering methods of a heightening of serviceability are reduced and it is offered to use improved disk of digging out device root of the tillage machines. Results of a study on the application of design and technological methods revealed that one of the promising areas of increased efficiency and durability are strengthening blades durable material of variable thickness.

**Keywords:** *system tillage, fertilizers, manure, crop residues, reversible disc plow.*

**Introduction**

The term “tillage” embraces a range of operations applied prior to sowing, to prepare the soil for crop growth. These operations are using various types of implements and machinery to loosen, invert, and mix the soil, modify the surface configuration, change aggregate size, incorporate materials (fertilizers, manure, crop residues, etc.), eradicate weeds, and form openings for seed placement. Using advanced machines and technologies agricultural production can reduce its cost and increase competitiveness. The primary means of cost savings living and materialized labor is increasing durability wear parts and components of machines strengthening methods [1]. Flux durable alloys are the most versatile, economical and widely used in methods of restoring the economy and manufacturing of machine parts, providing the working surface of the special properties that contribute increase the duration of their time between failures [2]. In the agricultural machinery used almost all known methods and types of surfacing. Improved and implemented into

production progressive types: arc powder wires and ribbons, electroslog, induction, plasma, Gas ardent and others. Application surfacing operations allows create new bimetallic structures with the necessary technological and performance properties, thus increasing the durability products significantly reduce the costs of construction and alloy steels [3]. A promising direction of strengthening sustainable technologies and materials should be considered to strengthen the use of as a way to control the formation of the working surfaces of agricultural machines. This line of research found its development in the work [4].


Achieving the effect of controlled operation is determined by applying the local wear resistant coating 71 so that the selected scheme application and value durability of the material basis and provide the necessary strengthening (set) surfaces forming working groups. The second area is hard facing layer of variable thickness, with the parameters which includes the maximum and minimum thickness and length of layer determining step placement sites blades with different parameters [5]. In contrast to the strengthening of the homogeneous layer of durability is achieved by only more wear-resistant properties of the built-up layers, the controlled capacity is reached much greater effect of increasing the operating time required by building profiles of the trips.

So in the study [6] saw tooth blade is achieved using point arc welding as separate points strengthening. Value durability materials base and surfacing at the selected location diagram plots the strengthening achieved self-sharpening blades at its wavy shape, which reduces the energy process increases durability and plowing blade. Controlled operation obtained for other working bodies of agricultural machinery such as paws cultivators, shovels, hammers, knives to cut the tops and others.

Noteworthy method of strengthening durable material variable thickness [7], which is used in the manufacture sector repair disk beet machine. Blade digger in service acquired gear shape by varying the intensity of wear parts blades with different thickness of wear resistant layer. The process forming teeth contributes self-aggravation blade and reduce resistance entering the blade drive device digging up the soil. However, the disadvantage this method had the opportunity to strengthen the parts are small, and

development of technology to strengthen large parts such as disk archeologists, had difficulties related to the development and implementation of complex technological equipment. As a result of the research, a new design and technological methods to strengthen the working surface of the blade Disk digger durable material [7]. The essence of the method is shaping performances and depressions mostly metal layer method run-up, followed by the strengthening of existing technology (Fig. 1).

## Materials and Methods

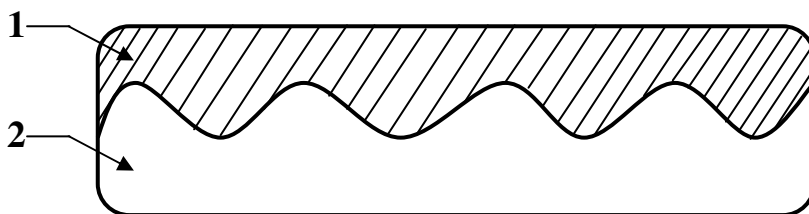

*Figure 1 - Schematic profile blades hardened durable material variable; thickness: 1 - wear-resistant layer, 2 - basic layer*

Study of regulation durable properties labor surface determining the influence of deposition parameters on the intensity wear parts blades.

Equation wear parts blades with different thickness endurance layer have the form:

$$\gamma_{\circ} = \frac{C_{\circ} R_x \left( 1 - \frac{\mu \xi}{l_{\circ}} \right)}{h_{\circ} l_{\circ}}; \gamma_H = \frac{C_H R_x \left( 1 + \frac{\mu \xi}{l_{\circ}} \right)}{h_H l_H}$$

(1)

Where  $\gamma_{\circ}$ ,  $\gamma_H$  - the intensity of wear parts blades with minimum and maximum thickness of wear resistant layer  $C_{\circ}$ ,  $C_H$  - coefficients operation of the primary and wear resistant layers  $R_x$  - the resultant component forces that determine the operation of the blade in the

radial direction;  $\mu$  – coefficient proportionality, which depends on the height of teeth  $\xi$ ;  $h_o$ ,  $h_H$  - total thickness blades at sites  $l_o$ ,  $l_H$ . As a result, changes and substitutions made set pattern parameters influence the intensity of wear resistant layer formation toothed surface of the blade at its operation:

$$\xi = \frac{l_o}{\mu} \left[ \frac{\frac{\varepsilon_o h_{o \max}}{\varepsilon_H h_{H \min}} l_H - \frac{\varepsilon_o h_{o \min}}{\varepsilon_H h_{H \max}} l_o}{\frac{\varepsilon_o h_{o \max}}{\varepsilon_H h_{H \min}} l_H + \frac{\varepsilon_o h_{o \min}}{\varepsilon_H h_{H \max}} l_o} \right]$$

(2)

Where  $\varepsilon_o$ ,  $\varepsilon_H$  - durability and endurance core layers.

Based on the established pattern forming surface of the blade the parameters of wear resistant layer, providing intensive forming teeth on the surface: the length of the blade are  $l_o = 15 \dots 30 \text{ mm}$ ;  $l_H = 15 \dots 20 \text{ mm}$  maximum thickness endurance layer  $h_{H \max} = 3.5 \dots 5 \text{ mm}$ . To set the intensity triggering the thickness Blades, investigates triggering discs reinforced durable material of variable thickness. Given that the intensity of the triggering inversely proportional to its thickness, based on the processing of the experimental data would explode, improved archeologists (Fig. 2) established an exponential dependence:

$$\gamma_l = \nu e^{-w h_l} \quad (3)$$

Where  $\nu$ ,  $w$  - steel ratios as determined by the method least squares.

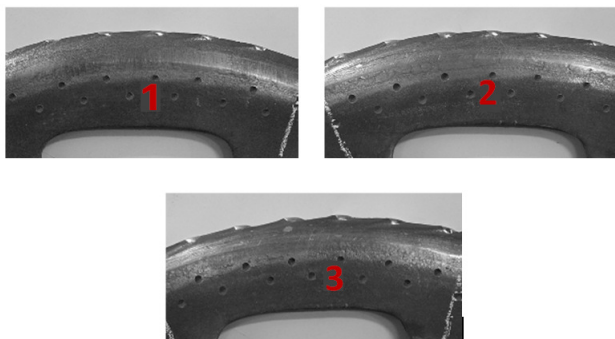


Figure 2 - General view of the disk sectors after working out 250 hectares of parameters: **a)** –  $t_3 = 35\text{mm}$ ,  $H_3 = 2\text{ mm}$ , **b)** –  $t_3 = 35\text{mm}$ ,  $H_3 = 2.5\text{ mm}$ , **c)** –  $t_3 = 35\text{mm}$ ,  $h_3 = 3\text{ mm}$

## Results

The results of experimental studies of advanced drive confirmed the position of the possibility of the formation of jagged surface of the blade during its operation. Based on production tests disc identified rational design parameters of the blades in intensity forming toothed surface needless aggravation, intensity of wear and time to failure: step location recesses  $t_3 = 45 \dots 47\text{ mm}$  depth  $h_3 = 2.5 \dots 2.7\text{ mm}$ , length  $l_H = 15 \dots 20\text{ mm}$ , which correspond intensity triggering hollow tooth  $\gamma_{ht} = 0.0139\text{ mm} / \text{ha}$  , teeth  $\gamma_t = 0,008\text{mm} / \text{ha}$ , elevation teeth by producing of 250 hectares -  $\xi = 1,39\text{ mm}$ , resource digger  $T = 1441\text{ ha}$ . As a result was confirmed adequacy of mathematical process models wear and gear shaping surface improved player.

The effectiveness of the method developed to strengthen the working surface of the Xia confirms the data shown in Table 1.

Table 1 - Comparative evaluation of disk archeologists reinforced format-1

Characterization archeologists			The intensity of the triggering	Relative self-sharpening
grade material	method of manufacture	method of strengthening		

			$\gamma_1$ mm / ha	
L30H uniform	molten	even durable layer	0.43256	0.33
steel 65G	stamped (serial)	even durable layer	0.021243	9.58
Sector steel 65G	made (repair)	durable layer variable thickness	0.035667* 0.027845	0.94
steel 65G	pressed (improved)	durable layer variable thickness	0.023353* 0.007897	0.99

\* In the numerator - the intensity of wear hollow, the denominator - intensity of wear of teeth

The average intensity of wear parts blades with rational parameters improved drive lower than in series. In this relative as exacerbation that determined with the time to failure, complies with the repair sectors.

Analysis of the data shows that the proposed method of strengthening disk archeologists has an advantage over the existing consolidation that shown to increase longevity almost doubled and is characterized more rational approach to the creation of technology to strengthen durable material of variable thickness in a production environment. Working drawings of the improved design of disk digger root crop machinery transferred to JSC "Ternopol combine factory "for introduction into production.

The advanced design of disk digger preferable serial diggers through reinforced blades with variable thickness durable material that provides increased performance and durability through the formation of serrated blade profile when performing destination.

The economic effect of implementing disk archeologists proposed structures were calculated on the basis of improving its efficiency and durability. In figure durability disk archeologists made time to regrinding. Lifetime disk archeologists to regrinding according to data [8] are four seasons of field work or

550 ... 600 hectares per root crop machine KS-6B. According to the

results production tests, life developed disk archeologists actually equal to the life of CS-6B, the economic effect is 14334hrn one machine root crop that is economically viable.

## Conclusions

1. Results of a study on the application of design and technological methods revealed that one of the promising areas of increased efficiency and durability are strengthening blades durable material of variable thickness. When the function purpose it promotes self-aggravation blade and formation on working surface of teeth.

2. Based on the obtained mathematical model (2) forming dentate surface of the blade, hardened durable material of variable thickness, established patterns of influence of parameters on the wear resistant layer intensity shaping of the technological process. The parameters of wear resistant layer, providing intensive forming teeth on the surface: the length of the blade are  $l_O = 15 \dots 30 \text{ mm}$ ;  $L_H = 15 \dots 20 \text{ mm}$  maximum thickness endurance layer  $hH \text{ max} = 3.5 \dots 5 \text{ mm}$ .

3. Results of experimental studies triggering drives the blades the rational design parameters of the blades in intensity forming toothed surface s self-aggravation, intensity wear and time to failure: step location grooves  $t_3 = 45 \dots 47 \text{ mm}$ , depth -  $h_3 = 2.5 \dots 2.7 \text{ mm}$ , length -  $L_H = 15 \dots 20 \text{ mm}$ , which 75 correspond to the intensity of wear hollow  $\gamma_{VP} = 0.0139 \text{ mm} / \text{ha}$  teeth Tooth  $\gamma_t = 0,008 \text{ mm} / \text{ha}$ , elevation teeth for elaboration of 250 hectares -  $\xi = 1,43 \text{ mm}$ , resource digger  $T = 1533 \text{ ha}$ , regulatory developments KC-6B 990 hectares.

Confirmed the adequacy of mathematical models of processes and operation forming toothed surface developed disks.

4. The analysis developed working body root crop machinery introduced in the production of JSC «Ternopol Combine Plant". The economic effect from the introduction designed drive unit is digging up 12,557 USD per root crop machine.

**Reference**

1. Tkachev V. N., Wear and increased durability of parts of agricultural machines. - Mashinostroenie, 1964. – p.176.
2. Pellet I. V., Surfacing work nodes tillage and harvesting of agricultural machinery / / Automatic welding. - 2003. - № 8. - pp. 36 - 41.
3. Ryabtsev I. A., Classification and characterization methods surfacing / / welder. - 1998. - № 3. - pp. 23 - 25.
4. Kozachenko O. V. and Bleznyuk O. V., A new method for strengthening the working of agricultural machines / Proceedings 1 of the International Scientific Conference examined. Dynamics, durability and reliability of agricultural machines. - Kiev: TSTU, 2004. - pp. 632 - 636.
5. Denisenko N., Wear and improve long-eternity working of agricultural machinery [Text] / M. Denisenko, A. Opalchuk / / Bulletin TNTU. - 2011. - Special Issue. - A portion 2. -pp. 201-210.
6. Boiko A. and Balabukha A., Hardening of the blades as a method of managing their geometrical shape in wear / / machine parts: ST. Science. HDTUSG Ave. - Delhi: HDTUSG, 2000. - VIP. 4. - pp. 49 - 56.
7. Martynenko V. J., Kozachenko O. V., Sychev I. P. and Bleznyuk E. V., Disk digger root crop machines: DP 56556A Ukraine, , Wolf (Ukraine). - 2002076009, appl. 19.07.2002, Publ. 15.05.2003, Bull. № 5. - 2 p.
8. Sychev I. P., Increased durability of beet workers cutting machines by optimizing the parameters of the deposited layer / / Tractors and farm machinery. - 1985. - № 11. - pp. 48 -