

# Exploration for Marble Deposit in Parts OF Okpella, South-Southern Nigeria

## ABSTRACT

The ultimate aim of the electrical resistivity survey is to determine the resistivity distribution with depth on the basis of surface measurements of the apparent resistivity and to interpret it in terms of geology. Marble deposit was investigated with the application of electrical resistivity method using Vertical Electrical Sounding (VES) technique with the aim of characterising the marble deposit in parts of Okpella. Six (6) VES were acquired using the Schlumberger array for data acquisition with current electrode spacing varying from 1.0 to 150.0 m. The VES data obtained were interpreted using ipi2win Software. The results showed three layers indicating subsurface geologic sequence probed 26.4 m and beyond with clay/clayey sand (23.3 – 219.1  $\Omega$ m), sand (423 - 2040  $\Omega$ m) and marble (12661 - 404498  $\Omega$ m). The occurrence of marble deposit was revealed at VES points at 1, 2 and 5 in the studied area. This study concluded that the study area had vast occurrence of the marble deposits, which would be of economic importance, if exploited.

**Keywords:** Crystalline, Schlumberger array, Non-foliated, Resistivity, Lithology

## 1. INTRODUCTION


Marble, a crystalline, non-foliated metamorphosed limestone through the action of heat and pressure occurs within the migmatite gneiss- schist-quartzite complex as relicts of sedimentary carbonate rocks. These are Upper Proterozoic schist belt metasediments which are normally marked by a general absence of carbonates. Such marble deposits appear to be limited to the western portions of the south and central parts of the country [1]. The schist (metasediments) occurs as a supracrustal cover on the basement and consists of quartz – biotite, calc-gneiss and marble, metaconglomerate and mica schist [2] - [7]. Marble is extremely valuable industrial rock raw material. Construction (eg building, sculpture, monuments, and as dimension stones) and cement manufacturing industries are principal consumers. It is also used in the production of chemicals, fertilizer, abrasives, paint making, tooth paste, detergents, soaps, pharmaceuticals, cosmetics, chewing gum, sweets, water treatment, soil treatment, ceramics making, asbestos making, industrial adhesives, paper conversion, livestock concentrate, chemical fillers (rubber and plastic products) and steel and iron refinery. The marbles are of varying colours of whitish, grayish, cream and pale greenish. The marble is predominantly composed of calcite with specks of iron sulphide and calc-silicate minerals. Marble is composed essentially of calcite ( $\text{CaCO}_3$ ), dolomite [ $\text{CaMg}(\text{CO}_3)_2$ ], or a combination of the two, with a fine- to coarse-grained crystalline texture [8].

37 The high contrast in resistivity values between carbonate rock, clayey and sandy materials favours the  
38 use of electrical resistivity method for determining the boundary between these Earth materials [9]. Since  
39 the electrical resistivity of earth materials can be influenced by parameters such as rock matrix, porosity,  
40 permeability, temperature, degree of fracturing, grain size, rock type and the extent of weathering. The  
41 electrical resistivity method is therefore adopted for this research. The electrical resistivity method is  
42 particularly handy in investigating the nature of subsurface formations by studying the variations in their  
43 electrical properties. Proceeding to this research work, there has been dearth of information on the  
44 existing literature of marble deposit in the area been investigated. Therefore the current effort is directed  
45 at unveiling the situation with a view to find an enduring solution in characterising the marble deposit in  
46 parts of Okpella.

47

### 48 **1.1 LOCATION AND GEOLOGICAL SETTING**

49 The studied area lies within Latitudes  $7.37563^{\circ}$  and  $7.35902^{\circ}$  North and Longitudes  $6.44548^{\circ}$  and  
50  $6.44536^{\circ}$  East (Figure 1) of Okpella in the northern part of Edo State, Nigeria. Geologically, it falls within  
51 the Basement Complex of south southern Nigeria which is underlain by undifferentiated older Granite  
52 mainly coarse grained granite and porphyritic granite of the Pan-African older Granitoids. The rocks are  
53 generally in the NW direction and dipping to the East. The Older Granites were first distinguished from the  
54 “younger” alkaline granites by [10]. The schist belt of Okpella are seen to have been severally invaded  
55 by the event of tectonic activities in the area giving rise to large mass of plutonic and volcanic rocks which  
56 are of granitic origin. Relic folds are evident on the rock mass seen to be floating as xenolithic structures  
57 with minor and micro folds which originated from the various stages of metamorphism.

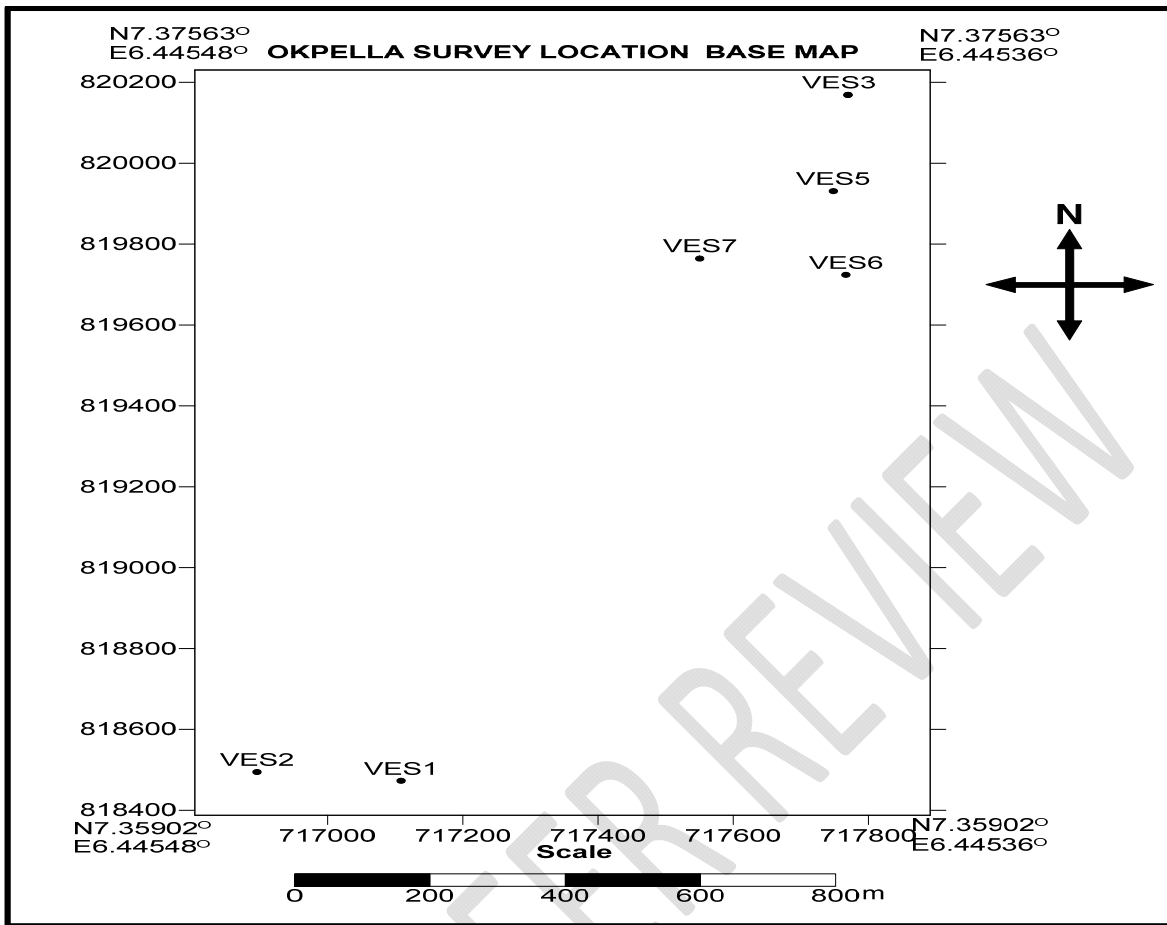

58

59 Figure 1: Location base map

60 **1.2 THEORETICAL BACKGROUND**

61 The resistivity method provides a quantitative measure of the conducting properties of the  
 62 subsurface. In this method a series of potential differences are acquired at successively greater electrode  
 63 spacings while maintaining a fixed central reference point. The induced current passes through  
 64 progressively deeper layers at greater electrode spacing. The potential difference measurements are  
 65 directly proportional to the changes in the deeper subsurface. Apparent resistivity values calculated from  
 66 measured potential differences can be interpreted in terms of overburden thickness, water table depth,  
 67 and the depths and thicknesses of subsurface strata [10]. The two most common arrays used for VES are  
 68 the Wenner array and the Schlumberger array. Vertical electrical sounding (VES) field method that used  
 69 in this research involves the measurement of the variation of resistivity value with depth. This technique  
 70 can be used to find the depths of layers in the earth having anomalously high or low conductivities and to  
 71 determine the depth, approximate shape of ore bodies with anomalous resistivity. The foundation for  
 72 electrical resistivity theory is governed by Ohms law.

73 The resistance (R) of the wire to current flow can be expressed as:

74 
$$R \propto \frac{L}{A} \tag{1}$$

75 
$$R = \frac{\rho L}{A} \quad (2)$$

76 From Ohm's law,

77 
$$R = \frac{\Delta V}{I} \quad (3)$$

78 
$$\frac{\Delta V}{I} = \frac{\rho L}{A} \quad (4)$$

79 
$$\rho = \frac{A \Delta V}{IL} \quad (5)$$

80 Where


81  $\rho$  is the resistivity (in Ohm-metre), L is the length of wire (in metres)

82 A is the cross-sectional area of the wire (metre<sup>2</sup>), R is the resistance (Ohms)

83 I is the current (ampere).

## 84 2. MATERIALS AND METHOD

85 Geophysical surveys are efficient and cost-effective in providing geotechnical information since they  
86 combine high speed and appreciable accuracy in providing subsurface information over large areas [12].  
87 In this study, Vertical Electrical Sounding (VES) using Schlumberger array (Figure 2) was adopted in  
88 order to study the variations in the resistivity distribution of the soil with depth. An electrical current is  
89 passed through the ground and two potential electrodes allow us to record the resultant potential  
90 difference between them, giving us a way to measure the electrical impedance of the subsurface material.  
91 The apparent resistivity is then a function of the measured impedance and the geometry of the electrode  
92 array. The importance of electrical resistivity method makes its usefulness in many fields like  
93 investigating natural resources, environmental problems, and engineering studies for the last three to five  
94 decades. Six (6) VES were carried out which is enough for the anticipated depth of investigation using  
95 Schlumberger configuration array with current electrode spacing varying from 1.00 to 150.00 m. The  
96 resistivity techniques especially the Vertical Electrical Sounding (VES) has been used for investigating  
97 subsurface layer properties and groundwater potential. By this method, the subsurface characterization is  
98 determined based on the change of resistivity values with depth. Range of specific resistivity value  
99 indicates the presence of certain rock mass characteristic [13] and some other researchers have the  
100 proposed range of resistivity values based on the rock or soil conditions. The processing of the acquired  
101 data was done by plotting the apparent resistivity against half-current electrode spacing (AB/2) on a log-  
102 log graph sheets. The outcome of these served as input for numerical iteration using ipi2win Software.

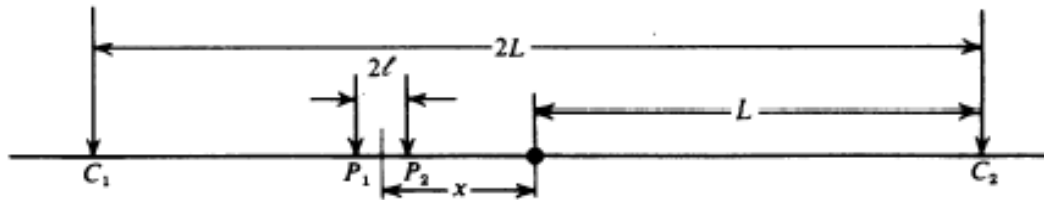

103



104 Figure 2: Schlumberger (gradient) array. The distance between the potential electrodes is much smaller  
 105 than the distance between the potential and current electrodes. The most common configuration  
 106 is to put the measuring dipole in the centre of the array.  
 107

108 **3. RESULTS AND DISCUSSION**


109 Geoelectrical resistivity survey involving vertical electrical soundings have been used to characterise the  
 110 marble deposit in parts of Okpella. The summary of the interpreted results of the VES curves at each VES  
 111 stations are presented in (Table 1). Data generated from the Vertical Electrical Sounding using  
 112 Schlumberger configuration was presented as geoelectric sounding curves. The results showed variable  
 113 composition of subsurface geologic sequence probed 26.4 m and beyond with clay/clayey sand (23.3 –  
 114 219.1  $\Omega\text{m}$ ), sand (423 - 2040  $\Omega\text{m}$ ), marble (12661 - 404498  $\Omega\text{m}$ ). This is accordingly represented in figure  
 115 3. The characteristic curve types obtained in the area are H and K curve types (Figure 4) depicting three  
 116 geoelectric layers. VES 1, 2 and 5 with resistivity values ranged from 12661 to 404498  $\Omega\text{m}$  shows the  
 117 existence marble.  
 118

**Table 1: Summary of VES Results**

VES STATION	LAYER	RESISTIVITY ( $\Omega\text{M}$ )	LAYER THICKNESS (M)	DEPTH (M)	CURVE TYPE	INFER LITHOLOGY
VES1	$\rho_1$	423	3.99	3.99	K	Sand
	$\rho_2$	12661	6.3	10.3		marble
	$\rho_3$	2040	-	-		sand
VES2	$\rho_1$	577	2.36	2.36	H	Sand
	$\rho_2$	219.1	10.44	12.79		Clayey Sand
	$\rho_3$	404498	-	-		Marble
VES3	$\rho_1$	646	0.98	0.98	H	Sand
	$\rho_2$	23.5	7.03	7.99		Clay
	$\rho_3$	1061	-	-		Sand
VES5	$\rho_1$	1140	1.54	1.54	H	Sand
	$\rho_2$	103	24.87	26.4		Clayey Sand
	$\rho_3$	41644	-	-		Marble
VES6	$\rho_1$	915	2.01	2.01	H	Sand
	$\rho_2$	147	17.41	19.4		Clayey sand
	$\rho_3$	502	-	-		Sand
VES7	$\rho_1$	636	0.96	0.96	H	Sand
	$\rho_2$	23.3	7.11	8.07		Clay
	$\rho_3$	1135	-	-		Sand

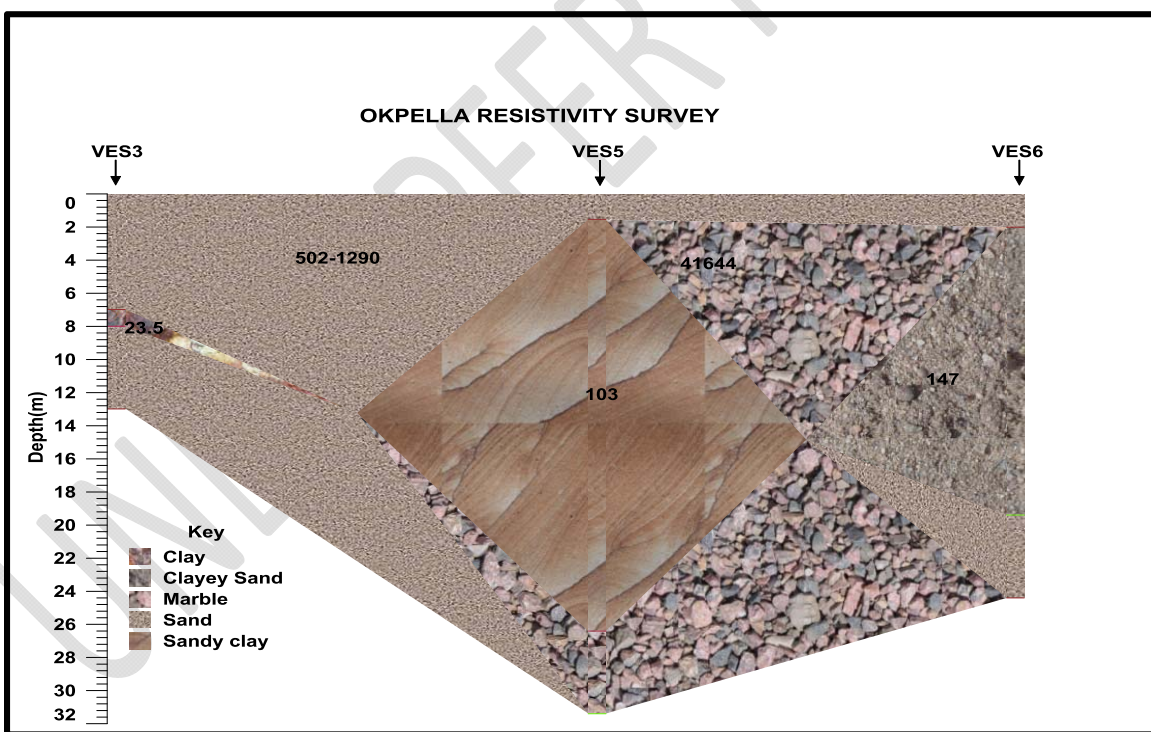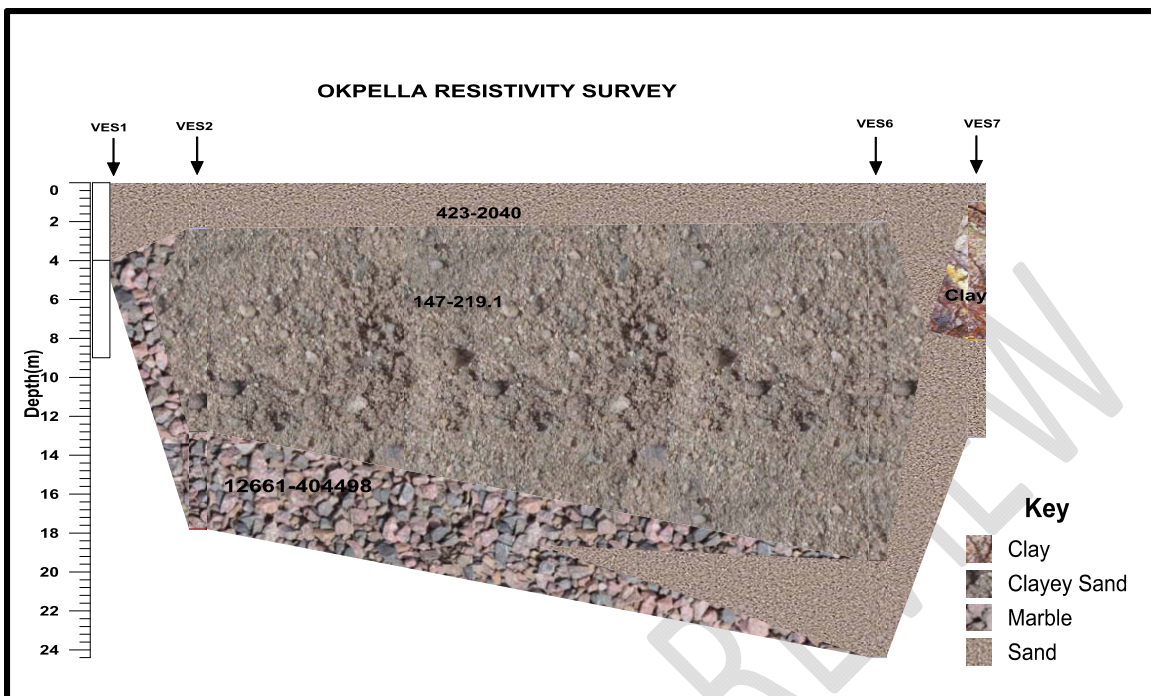


122 Figure 3: Geological Cross Section in location

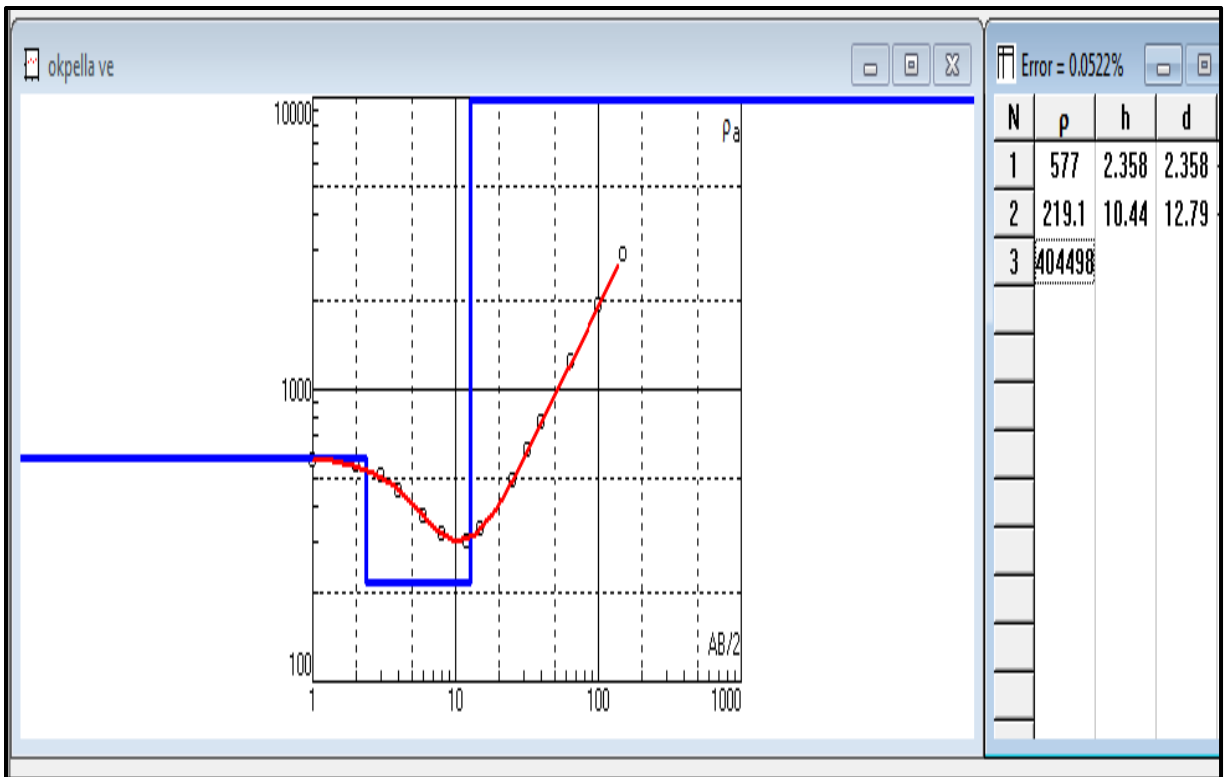

123

124

**H** curve type. (VES 2)

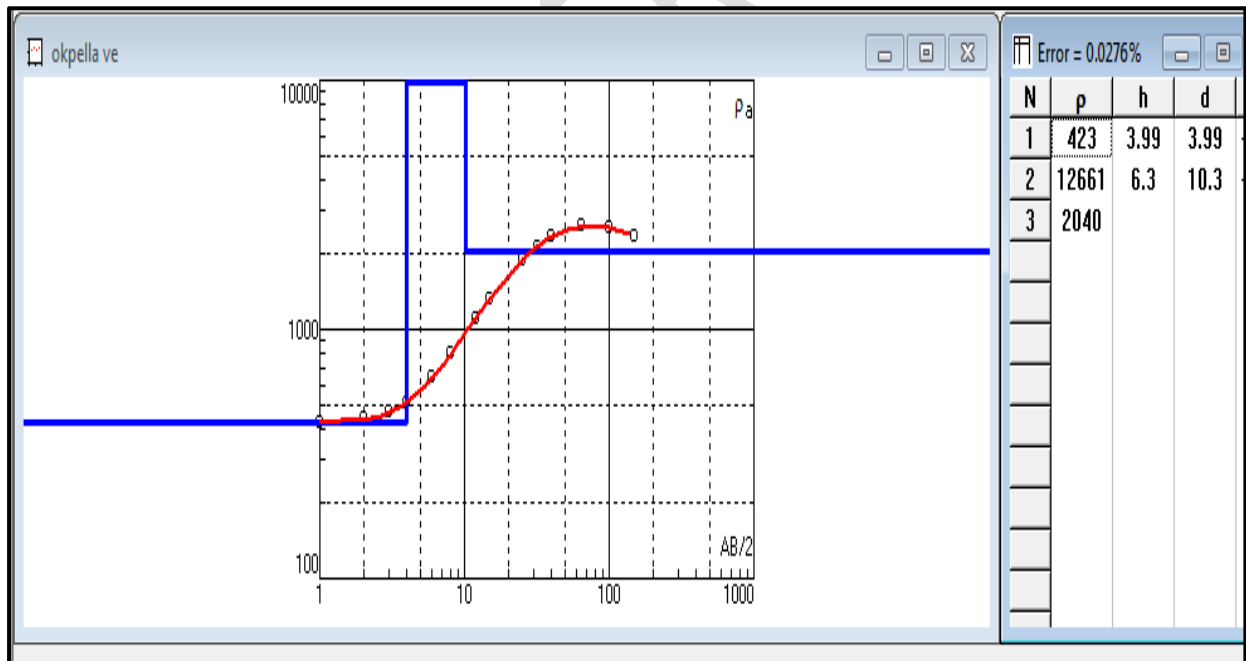

125

126

**K** curve type. (VES 1)

127 Figure 4: Samples of VES curve types of the study area

128

129

130

131 **4. CONCLUSION**

132 Resistivity measurements at the surface of the earth are associated with varying depths relative to the  
133 geometry of the current and potential electrodes in the survey. Vertical Electrical Sounding technique  
134 using Schlumberger configuration was carried out at six (6) VES stations in parts of Okpella in Etsako  
135 East local government area of Edo State Southsouth, Nigeria. The results obtained from VES delineated  
136 three geoelectric units which comprises clay/clayey sand (23.3 – 219.1  $\Omega\text{m}$ ), sand (423 - 2040  $\Omega\text{m}$ ) and  
137 marble (12661 - 404498  $\Omega\text{m}$ ) horizon units. The results show that VES 1, 2 and 5 revealed occurrences  
138 of marble deposits. It follows that the studied area had vast occurrence of the marble deposits, which  
139 would be of economic importance, if exploited.

140

141 **REFERENCES**

142

143 [1] Felix, BF, Yomi, BG. Geology and Occurrences of Limestone and Marble in Nigeria. Journal of  
144 Natural Sciences Research. 2013: 3 (11), 60 - 65.

145 [2] Okeke, PO, Meju, M.A. Chemical evidence for the sedimentary origin supracrustal rocks, Southwest,  
146 Nigeria. Journal of mining and geology. 1985: 22 (1and 2), 97-104

147 [3] Ajibade, AC, Rahaman, MA, Woakes, M. Proterozoic Lithospheric evolution (Kroner Ed)  
148 American Geophysical Union. 1987: 17, p. 259-271

149 [4] Odeyemi, IB. Lithostratigraphic and structural relationships of the upper Precambrian metasediments  
150 in Igarra area, Western Nigeria. In Ogezi in the Precambrian Geology of Nigeria. Geological survey  
151 of Kaduna 1988: p.111-123.

152 [5] Ekwere, SJ, Ekwueme, BN. Geochemistry of Precambrian Gneiss in the eastern part of the Oban  
153 massif, Southern Nigeria. Geo Mynbouw. 1991: 70, p. 105- 114.

154 [6] Imeokparia, EG, Emofurieta, WO. Protoliths and Petrogenesis of Precambrian gneisses from the Igbeti  
155 area, S W Nigeria. Geochemical Journal. Erde. 1991: 51 p .337-347.

156 [7] Ocan, CO, Coker, SL, Egbuniwe, IG. The Geology of Igarra-Auchi area, Excursion guide at the annual  
157 conference of the Nigerian Mining and Geosciences Society (NMGS), Itakpe, 2003 52p.

158 [8] Serra, R. Dictionary of Geology. Academic (India) Publishers. 2006: New Delhi – 110008.

159 [9] Zhou, W., Beck, B. F. and Stephenson, J. B. Reliability of dipole-dipole electrical resistivity tomography  
160 for defining depth to bedrock in covered karst terrains. Environmental Geology. 2000: 39, 760–766.

161 [10] Falconer, JD. The Geology and Geography of Northern Nigeria. London Macmillan Publications.  
162 1911: (p.295)

163 [11] Ozegin, KO, Okolie, EC. Application of Combined Electrical Resistivity Techniques for Subsurface  
164 Characterisation and Groundwater Resource Development in Okpella, Edo state Nigeria. *Nigerian*  
165 *journal of physics*. 2018: 27(S), 69 – 82.

166 [12] Olorunfemi, MO Mesida, EA. Engineering Geophysics and its application in Engineering Site  
167 Investigation-(case study from Ile-Ife area). The Nigerian Engineer. 1987: 22(2): 57-66.



168 [13] Telford, WM, Geldart, L,P Sheriff, RE. *Applied Geophysics*. Second Edition, Cambridge University  
169 Press. (1990): 522-577.

UNDER PEER REVIEW