

## MODFLOW's River Package. Part 2

Correction, combining analytical and numerical approaches.

### **Abstract**


Most widely used integrated hydrologic models still describe the flow interaction between streams and aquifers using primitive early concepts. In the previous article the shortcomings of the methodology were shown in great details. In this second part means are presented by which improvements can be introduced into the procedures. Accuracy and numerical efficiency will be improved. The article describes in details the proposed alternatives for both the saturated and the unsaturated connections. In the article reference is made specifically to the code MODFLOW. Most of the other integrated hydrologic models used for large-scale regional studies apply essentially the same methodology to estimate seepage.

### **1. Introduction**

20 Large-scale hydrologic models such as MODFLOW (McDonald, and  
 21 Harbaugh, 1988) try to be as physically based as possible. They  
 22 nevertheless remain highly conceptual. In this article a methodology is  
 23 introduced to improve the estimation of seepage under conditions of  
 24 saturated or unsaturated hydraulic connection.

25  
 26 **2. Proposed combined analytical-numerical estimation of seepage under**  
 27 **a saturated connection**

28 Figure 1 displays the flow pattern of saturated seepage from a rectangular  
 29 cross-section of a river toward some distance away in the surrounding  
 30 aquifer.

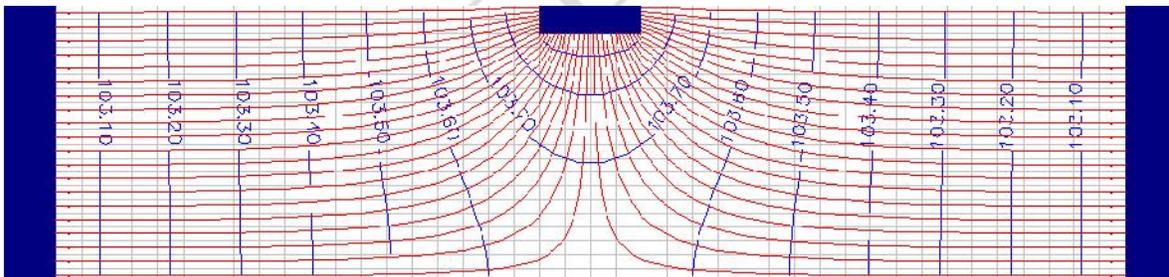

31  
 32  
 33 Figure 1. Exact analytical flow pattern from a rectangular cross-section with  
 34 a moderate degree of penetration. After Miracapillo and Morel-Seytoux,  
 35 2014)

36 It is clear in Figure 1 that the average head in the aquifer cell is less than the  
 37 river head, which in this case is 104 m. The boundary condition at both  
 38 ends of the region was a uniform head of 103 m. As the flow approaches the

39 right and left sides of the system it tends to become horizontal. The question  
40 is: how to combine such analytical solution with an overall numerical code  
41 such as e.g. MODFLOW? In the large-scale regional studies the water-table  
42 aquifer is treated as a single calculation layer, which means that the model is  
43 using the Dupuit-Forchheimer assumption that in the aquifer the head  
44 distribution in the vertical direction is hydrostatic. In other words the flow  
45 in that water-table aquifer is considered horizontal. Yet it is clear from  
46 Figure 1 that the flow pattern in the vicinity of the river is not horizontal.  
47 The proposed solution is to treat the flow for what it is locally that is 2-  
48 dimensional in the vertical plane and reattach it at some distance away from  
49 the river bank to a 2-dimensional numerical solution in the horizontal plane.  
50 To achieve that result one distinguishes the aquifer cell that contains the  
51 river, the “river cell”, from an adjacent neighboring cell as shown in Figure  
52 2. (There may or may not exist a clogging layer). The lateral grid size,  $G$ , is  
53 chosen, at a minimum, such that by the time the seepage flow from the river  
54 has reached the center of the right (or left) half of the river cell it has become  
55 horizontal. That way the Dupuit-Forchheimer assumption to calculate the  
56 flow between the river cell and the adjacent cell is legitimate. The analytical  
57 solution for the flow (Morel-Seytoux, 2009; Morel-Seytoux et al., 2013;  
58 Morel-Seytoux et al., 2016) as shown in Figure 1, has demonstrated that



86 where  $K_H$  is the aquifer hydraulic horizontal conductivity,  $L_R$  is the river  
87 reach length,  $h_S$  is the head in the river and  $h_f$  is the average head in the  
88 aquifer river cell (i.e. the cell that contains the river).  $G_{one-sided}$  is the SAFE  
89 (Stream-Aquifer Flow Exchange) dimensionless conductance. That  $G_{one-sided}$   
90 or simply  $G$  has been estimated exactly analytically. It is a function of the  
91 normalized wetted perimeter of the river,  $W_p^N = \frac{W_p}{D_{aq}}$  (2), of the degree of  
92 penetration,  $\frac{H}{D_{aq}}$  (3), where  $H$  is the river stage, of the degree of anisotropy,  
93  $r_{anis} = \frac{K_V}{K_H}$  (4), of the excess distance from the minimum standard far  
94 distance,  $D = \frac{G}{4} - (2\frac{D_{aq}}{\sqrt{r_{anis}}} + B)$  (5) (which means that the minimum grid  
95 size must be  $G_{min} = 8\frac{D_{aq}}{\sqrt{r_{anis}}} + 4B$  (6) and of the presence of a real  
96 clogging layer defined by its leakance coefficient,  $L_{rcl} = \frac{K_{rcl}}{e_{rcl}}$  (7). The  
97 symbol for  $G$  when all the effects of anisotropy, excess distance over the  
98 minimum standard far distance and presence of a real clogging layer are  
99 explicitly accounted is  $G_{anis-D-rcl}$  if necessary, though otherwise for  
100 brevity still labeled as  $G$ . The total seepage discharge is thus:

101 
$$Q_S^{safe} = 2L_R K_H G (h_S - h_f) \quad (8)$$

102 On the other hand the MODFLOW equation is:

103 
$$Q_S^{mod} = L_R W_p L_{mod} (h_S - h_f) \quad (9)$$

104 If there is a tight streambed (clogging layer) MODFLOW proposes for the

105 leakance coefficient the expression: 
$$\frac{K}{M} = \frac{K_{cl}}{e_{cl}} = L_{mod} \quad (10)$$

106 However MODFLOW does not provide a procedure to estimate these

107 clogging layer parameters except possibly through calibration.

108 If there is no tight streambed within some limited conditions MODFLOW

109 proposes: 
$$L_{mod} = \frac{K_{aq}}{1} = \frac{K_V}{1} \quad (11)$$

110 Identification of Eq.(8) and (9) shows that as long as there is saturated

111 connection, whether there is a tight streambed or not, the choice for

112 MODFLOW should be: 
$$L_{mod} = L_{safe} = 2K_H G / W_p = \frac{K_H G}{B + H} \quad (12)$$

113 Morel-Seytoux et al. (2013 and 2016) have provided all the information

114 necessary to calculate  $G$  in terms of the local conditions and the values of the

115 parameters defining the system. It requires only a few algebraic calculations

116 (Miracapillo and Morel-Seytoux, 2014; Morel-Seytoux et al., 2016) .

117 When using the leakance coefficient of Eq.(10) in the MODFLOW Eq.(9)

118 for seepage discharge the river cell head used is  $h_{ijk}$ , that is the finite

119 difference average value of head in the full river cell, which is precisely the  
120 average value of head in the half river cell and a very close approximation  
121 for the head at the center of the half river cell, which is the head needed for  
122 the validity of Eq.(9).


### 123 **3. Proposed combined analytical-numerical estimation of seepage under** 124 **an unsaturated connection**

125 This is a more complicated situation. The complete physical system consists  
126 of a river, a clogging layer (riverbed), an unsaturated zone below, a capillary  
127 fringe, a water table mound, a river cell and an adjacent cell (Figures 3 and  
128 4).

#### 129 **3.1. The simplified description of the unsaturated zone**


130 The goal is to describe approximately, simply but with sufficient accuracy,  
131 the transient flow exchange between surface water (river, canal or pond) and  
132 the underlying aquifer under an unsaturated connection. The riverbed acts as  
133 a clogging layer. In the aquifer just below the clogging layer, the flow may  
134 be saturated or unsaturated. The word interface refers to the boundary  
135 between the bottom of the clogging layer and the top of the underlying  
136 aquifer, while we use the term capillary zone for the combination of both the  
137 unsaturated zone and the capillary fringe.

138 The approach is to simplify the analysis of the unsaturated situation by  
 139 approximating the shape of the water content profile in the unsaturated zone.  
 140 The selected profile for the water content is the one that would convey the  
 141 current seepage steadily and uniformly through the unsaturated zone.  
 142 In this document the unsaturated relative conductivity and the capillary  
 143 pressure functions are characterized by the Brooks-Corey formulation as  
 144 described (online) in Appendix 1.

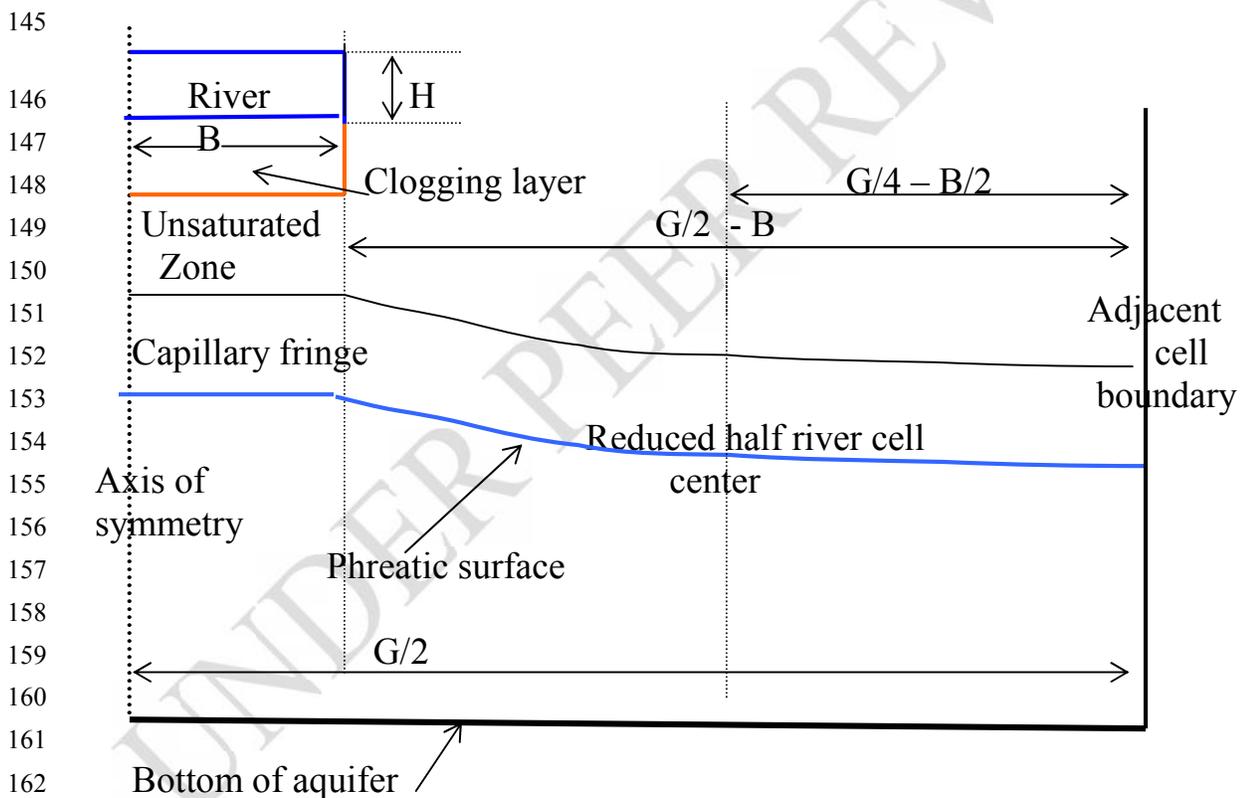

164 Figure 3. Cross-section view showing the different components of the  
 165 stream-aquifer system, applicable in the case of unsaturated connection.

166 For illustration, the parameter  $M=2.5$  (power in the capillary pressure curve  
 167 expressed as a function of normalized water content ) and  $p=5$  (power in the  
 168 relative permeability curve expressed as a function of normalized water  
 169 content) are chosen.

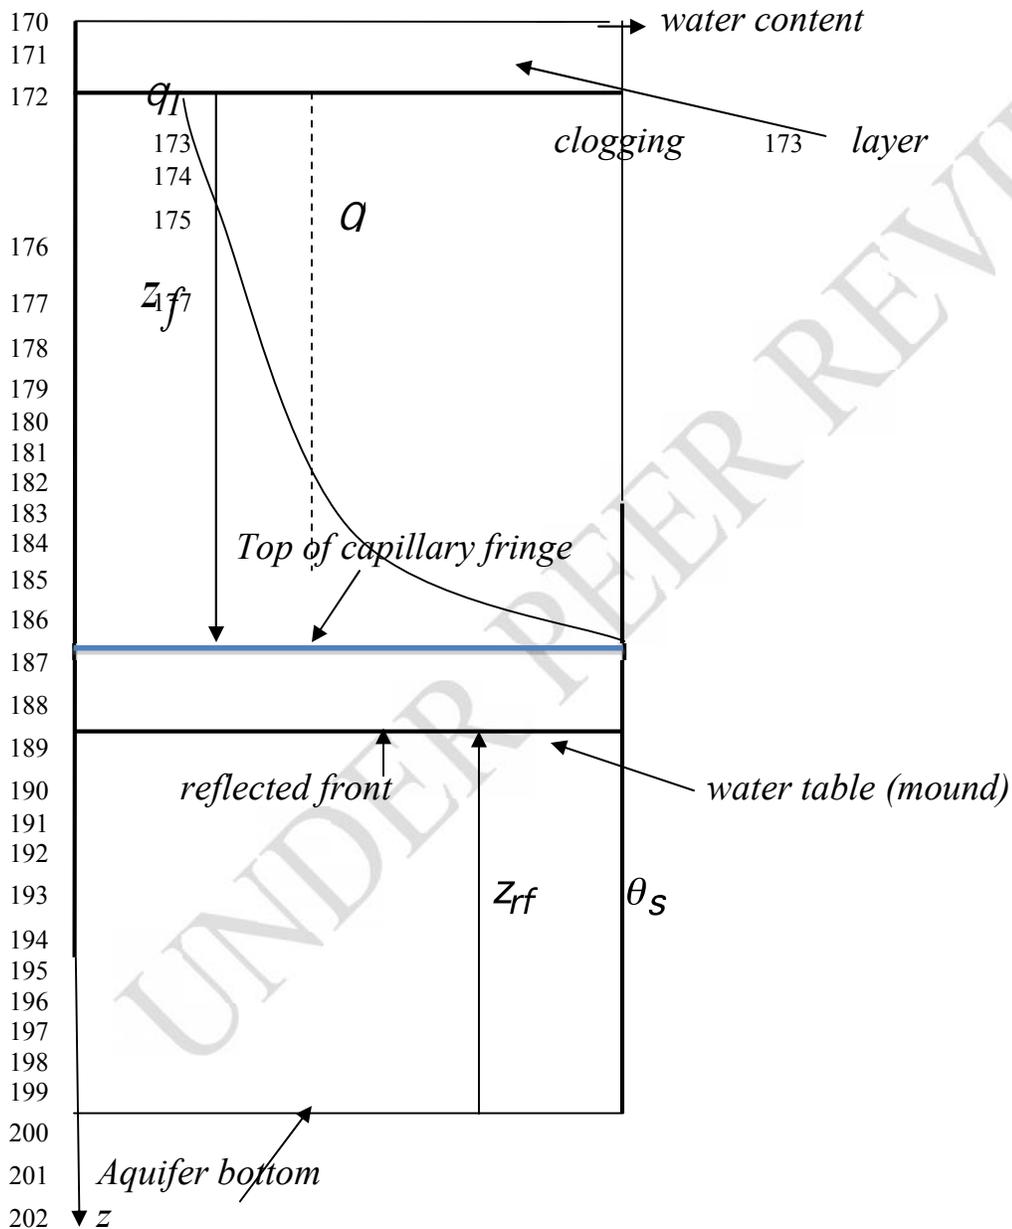

203 Figure 4. Water content profile below the riverbed and above the water table  
 204 mound.

205 In this case the normalized capillary pressure head profile (details in  
206 Appendix 2, online) is:

$$207 \quad h_c^* = \frac{1 + h_{cl}^* \sqrt{i_s^*} - e^{D_z z^*} (1 - h_{cl}^* \sqrt{i_s^*})}{\sqrt{i_s^*} [1 + h_{cl}^* \sqrt{i_s^*} + e^{D_z z^*} (1 - h_{cl}^* \sqrt{i_s^*})]} \quad (13) \quad \text{where } z^* = z/z_f \text{ is the normalized}$$

208 coordinate,  $z$  is the vertical coordinate with origin at the interface oriented  
209 positive downward, and  $z_f$  denotes the position (depth) of the bottom of the  
210 unsaturated zone from the bottom of the clogging layer.

211 At the interface between the clogging layer and the aquifer on the aquifer  
212 side there is a water content,  $\theta_l$ , distinct from the average one within the  
213 unsaturated zone,  $\theta$ . Furthermore,  $\theta_s$  is the saturated water content in the  
214 aquifer,  $h_{cl}$  is the capillary pressure at the interface, and its normalized value  
215 is  $h_{cl}^* = h_{cl} / h_{ce}$  where  $h_{ce}$  is the drainage entry pressure. The seepage rate at  
216 the interface is  $i_s$ . Dividing it by the vertical hydraulic conductivity of the  
217 aquifer,  $K_v$ , its normalized value is  $i_s^* = i_s / K_v$ . The coefficient  $D_z$  is:

$$218 \quad D_z = \ln \left\{ \frac{(1 + h_{cl}^* \sqrt{i_s^*})(1 - \sqrt{i_s^*})}{(1 + \sqrt{i_s^*})(1 - h_{cl}^* \sqrt{i_s^*})} \right\} \quad (14)$$


219 One can see from Eq. (13) that the capillary pressure takes the proper values  
220 at the water table and the interface (details in Appendix 2 online). The  
221 normalized water content is obtained as  $q^* = (h_c^*)^{-1/M}$ , while  $z_{rf}$  denotes the  
222 position (height) of the current water table (mound) as shown in Figure 4.

223 While the choice of the water content profile in the unsaturated zone is  
 224 approximate, the process maintains mass balance and the essential dynamics  
 225 of the process.  $D$  is the maximum thickness of the water table aquifer  
 226 including the clogging layer below the river, that is:

$$227 \quad D = e_{rcl} + z_f + h_{ce} + z_{rf} \quad (15)$$

228 In other words,  $D$  is the sum of the streambed thickness,  $e_{rcl}$ , the unsaturated  
 229 zone thickness, the capillary fringe thickness,  $h_{ce}$ , and the water table height.

230 Figures 5 displays the shape of the unsaturated zone water content profile for  
 231 a given set of parameters.

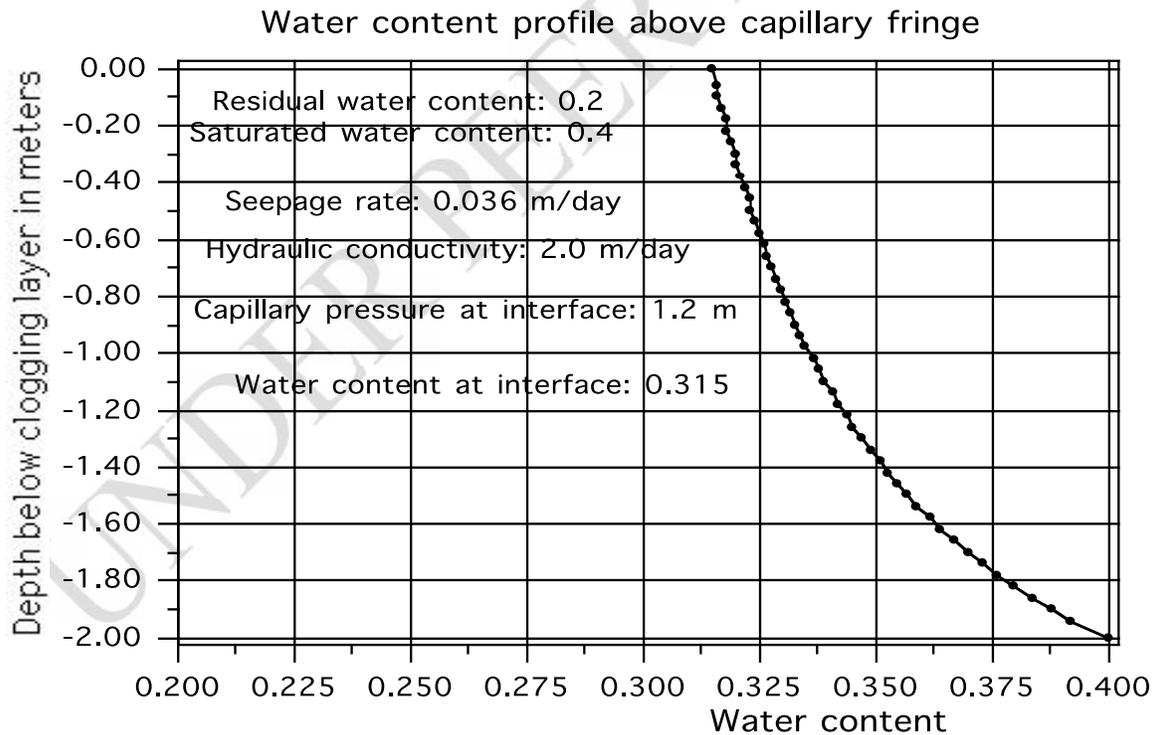

232  
 233 Figure 5. Water content profile in the unsaturated zone above the capillary  
 234 fringe.

235 (Had there been no flow the capillary pressure at 2 m above the capillary  
 236 fringe would have been 2.3 m but it is only 1.2 m because there is downward  
 237 flow).

238 Several different initial conditions are defined. (Some are applicable for the  
 239 case of saturated connection). It could be (1) incipient desaturation or  
 240 hydrostatic condition or (3) general saturated condition . These conditions  
 241 are described in Appendix 3.

### 242 **3.3 Estimation of recharge rate to the water table under** 243 **unsaturated connection**

244 In that case  $h_{cl} \geq h_{ce}$  (16a) and  $\theta_l^* \leq \theta^* \leq 1$  (16b)

245 Dynamic estimation of the water velocity from the bottom of the streambed  
 246 to the top of the capillary fringe will provide the average flow rate in the  
 247 unsaturated zone. The expression for that average (in space) dynamic water

248 velocity is): 
$$\frac{v}{K_V} = v^* = \frac{-H_{cS}[1 - (\theta_l^*)^{p-M}] + k_{rw}(\theta)z_f}{z_f} \quad (17a)$$

249 or 
$$\frac{v}{K_V} = v^* = \frac{-H_{cS}[1 - (h_{cl}^*)^{\frac{p-M}{M}}] + k_{rw}(q)z_f}{z_f} \quad (17 b)$$

250 This is an instantaneous value of a space average over the unsaturated zone.

251 Note that the first term on the right hand side of Eq.(17) expresses the  
 252 capillary resistance to flow on the part of the water table. That capillary  
 253 resistance being a potential is known exactly. It only depends on the end

254 boundary conditions and is independent of the actual profile shape. On the  
 255 other hand the second term that represents the always down force of gravity  
 256 is approximate because it depends upon the choice of the water content  
 257 profile.

258 For simplicity in writing let:  $-H_{cs}[1 - (h_{cl}^*)^{\frac{p-M}{M}}] = C_{ap} R_{es}$  (18)

259 where  $C_{ap} R_{es}$  is the capillary resistance, a negative value. Then Eq. (24) has a

260 simpler expression:  $v = K_V \left[ \frac{C_{ap} R_{es}}{z_f} + k_{rw}(q) \right]$  (19)

261 From a mass balance point of view the recharge rate to the top of the  
 262 capillary fringe is the sum of the seepage rate through the clogging layer and  
 263 of the amount of drainage from the unsaturated zone, symbolically:

264 
$$v_{rech}^{mass} = i_S + \left[ \frac{(q^o - q_r) z_f^o}{Dt} + \frac{(q_S - q_r)(z_f - z_f^o)}{Dt} \right] - \frac{(q - q_r) z_f}{Dt} \quad (20)$$

265 (Even though the numerical value of  $\Delta t$  is 1 (day), as a check on proper  
 266 dimensionality of the derived expressions it is better to keep it explicitly.

267 The superscript “mass” is not generally shown when mass estimate is  
 268 meant). The superscript “o” refers to *old* values, at the beginning of a period  
 269 (time step). The superscript “n” (or no superscript) refers to *new* values, at  
 270 the end of the period.

271 The space average instantaneous water flow rate in the unsaturated zone is:

272 
$$v = K_V \left[ \frac{C_{ap} R_{es}}{z_f} + k_{rw}(q) \right] = (i_s + v_{rech}^{dyn}) / 2 \quad (21)$$

273 from which one deduces: 
$$v_{rech}^{dyn} = 2K_V \left[ \frac{C_{ap} R_{es}}{z_f} + k_{rw}(q) \right] - i_s \quad (22)$$

274 The two Eqs. (20) and (22) for the recharge rate must give the same result.

275 By equating the two expressions one obtains an expression for the depth of

276 the unsaturated zone as a function of the capillary pressure at the interface:

277 
$$i_s + \left[ \frac{(q^o - q_r) z_f^o}{Dt} + \frac{(q_s - q_r)(z_f - z_f^o)}{Dt} \right] - \frac{(q - q_r) z_f}{Dt} = 2K_V \left[ \frac{C_{ap} R_{es}}{z_f} + k_{rw}(q) \right] - i_s \quad (23a)$$

278 Multiplying by  $z_f$  and dividing by  $2K_V$  one obtains:

279 
$$\frac{(q_s - q)(z_f)^2}{2K_V Dt} - \{k_{rw} - i_s^* + \frac{(q_s - q^o) z_f^o}{2K_V Dt}\} z_f - C_{ap} R_{es} = 0 \quad (23b)$$

280 Setting  $a = \frac{(\theta_s - \theta)}{2K_V \Delta t}$  (24a)  $b = -\{k_{rw} - i_s^* + \frac{(q_s - q^o) z_f^o}{2K_V Dt}\}$  (24b) and  $c = -C_{ap} R_{es}$  (24c)

281 the solution is: 
$$z_f = \frac{-b - \sqrt{b^2 - 4ac}}{2a} \quad (25)$$

282 Note that, since this value of  $z_f$  is obtained by requiring that the recharge rate

283  $v_{rech}$  be the same whether evaluated by mass balance or dynamically, in the

284 later sections the stipulation that  $v_{rech}$  is the mass balance or the dynamic

285 estimate is superfluous since they have the same value.

286 **3.4 Evolution of (water table) mound below the river bed.**

287 Because the driving force behind the transient evolution of the unsaturated  
288 seepage is the head in the river cell (the aquifer cell that contains the river  
289 reach cross-section), we look at how the aquifer zones react to that head and  
290 to the head in the river. Because of the complex interaction between these  
291 different zones (river, mound, river cell away from river banks, adjacent  
292 cells) to keep derivations (and illustrations) simple we simply look at how  
293 the mound reacts to the head in the half aquifer river cell not under the  
294 clogging layer (see Figure 3),  $h_f$ . (This is a reduced half river cell as it  
295 excludes the water-table mound below the river bottom). Naturally in  
296 practice the river head is affected by the river flow and its interaction with  
297 the aquifer below. Similarly the head in the river cell is affected by the heads  
298 in adjacent cells, conditioned by what happens in the full river-aquifer  
299 system, as a result of pumping, artificial recharge, etc. These heads are not  
300 realistic boundary conditions. Here we want to focus on the procedures to  
301 estimate seepage and therefore eliminate all complexities resulting from a  
302 full system that would obscure the manner in which seepage is estimated.

303 The water table mound is excited by the recharge rate from the river and the  
304 lateral outflow to (or inflow from) the part of the river cell, which is not  
305 below the river. Mass balance for the position of the mound is:

$$\begin{aligned}
\bar{f}_{erf}(B+H)\frac{dz_{rf}}{dt} &= (B+H)v_{rech} - GK_H(z_{rf} - h_f) \\
&= (B+H)\left\{2K_V\left[\frac{C_{ap}R_{es}}{z_f} + k_{rw}\right] - i_s\right\} - GK_H(z_{rf} - h_f)
\end{aligned} \tag{26a}$$

306

307 In this expression  $\bar{f}_{erf}$  is the specific yield (effective porosity) in the mound  
308 region.

309 The position of the center of the part of the half river cell on the right (or  
310 left) away from the river bank, which is  $G/4 - B/2$ , must exceed the standard  
311 far distance (Morel-Seytoux et al., 2016). This requirement is necessary to  
312 guarantee: (1) the applicability of the SAFE G as the proper dimensionless  
313 conductance and (2) that the flow between the river cell and the adjacent cell  
314 will be horizontal, i.e. meets the Dupuit-Forheimer criterion. This puts a  
315 limit on the minimum lateral size of the river cell. Let  $D$  be that excess  
316 distance. Also the SAFE dimensionless conductance appearing in Eq. (26)  
317 must be  $\Gamma_{flat-anis-\Delta}$  accounting for the fact that there is no longer river  
318 penetration, but the possibility of anisotropy in the aquifer and for an excess  
319 distance over the standard far distance. Eq. (26a) slightly rewritten is:

$$\bar{f}_{erf}(B+H)\frac{dz_{rf}}{dt} + GK_H z_{rf} = GK_H h_f + (B+H)v_{rech} \tag{26b}$$

320

321 Dividing throughout by  $\Gamma KH$ , setting  $S_{rf} = \frac{B+H}{K_H G}$  (27a)

$$C_{rf} = \bar{f}_{erf} S_{rf} \tag{27b}$$

322

323 one obtains: 
$$C_{rf} \frac{dz_{rf}}{dt} + z_{rf} = h_f + S_{rf} v_{rech} \quad (28a)$$

324 or more simply defining the excitation as:

$$325 \quad E_{rf} = h_f + S_{rf} K_V \left\{ 2 \left[ k_{rw}(q) + \frac{C_{ap} R_{es}}{z_f} \right] - i_S^* \right\} \quad (29a)$$

326 or  $E_{rf} = h_f + S_{rf} v_{rech}$  (29b) thus  $C_{rf} \frac{dz_{rf}}{dt} + z_{rf} = E_{rf}^o + (E_{rf}^v - E_{rf}^o)t$  (28b)

327 with structure of a Linear Reservoir hydrologic routing model with constant  
328 “time constant” (e.g. Gilcrest, 1950; Linsley et al., 1958; Corps of  
329 Engineers, 1960; Chow et al., 1988) with a linear variation of the excitation  
330 with time .

331 The expression (see online Appendix 4) applied for  $z_{rf}(n)$  (where n is the  
332 period (usually day) number for time) is:

$$333 \quad z_{rf}^{dyn}(n) = r_{rf} z_{rf}(n-1) + a_{rf} [h_f(n-1) + S_{rf} v_{rech}(n-1)] \\ 334 \quad + b_{rf} [h_f(n) + S_{rf} v_{rech}(n)] \quad (30)$$

335 with  $r_{rf} = e^{-\frac{1}{C_{rf}}}$  (31a)  $a_{rf} = [C_{rf}(1 - r_{rf}) - r_{rf}]$  (31b)  $b_{rf} = [1 - C_{rf}(1 - r_{rf})]$  (31c)

### 336 **3.5 Procedural steps**

337 The external excitations to the system are the stage (maximum water depth)  
338 in the river,  $H$ , and the head in the part of the half river cell away from the  
339 banks,  $h_f$ . The first step is to estimate (guess) the value of the interface  
340 capillary pressure,  $h_{cl}$ , and thus determine  $\theta_l$ ,  $\theta$  and  $i_S$  as well. Then one

341 estimates a value for  $z_f$  by requiring that the recharge rates estimated by  
 342 mass balance and dynamically be the same, using Eq. (25). That defines a  
 343 value of  $z_f$ . Next the value of  $z_{rf}$  is obtained by mass balance and  
 344 dynamically.

345 One estimates the value of  $z_{rf}$  by mass balance:  $z_{rf}^{mass} = z_{rf} = D - e_{cl} - z_f - h_{ce}$  (32)

346 and dynamically,  $z_{rf}^{dyn}$ , using Eq. (30).

347 Had one chosen the right value for  $h_{cl}$  the two estimated values for  $z_{rf}$  would  
 348 be the same. If they are not the same then iteratively one chooses other  
 349 values of  $h_{cl}$  so that ultimately the two values match within a given  
 350 tolerance. Once that tolerance is met the right value of  $h_{cl}$  and of all the  
 351 other variables was obtained.

#### 352 4. Numerical example

353 Parameters of the system are provided in Table 1.

Parameter	Definition	Unit	Value
$D$	Aquifer thickness below river bottom	m	20
$B$	Half-width of the river	m	5
$G$	Lateral grid	m	200
$D$	Excess far distance	m	5.0
$K_H$	Aquifer hydraulic conductivity (horizontal)	m/day	2.5
$K_V$	Aquifer hydraulic conductivity (vertical)	m/day	2.5
$K_{rcl}$	Hydraulic conductivity of clogging layer	m/day	0.01

$e_{rel}$	Thickness of clogging layer	m	0.4
$h_{ce}$	BC air entry value, aquifer	m	0.30
	BC air entry value, clogging layer	m	2.00
$M$	BC exponent, aquifer	-	2.5
	BC exponent, clogging layer	-	2.5
$p$	BC Exponent conductivity aquifer	-	5
	BC exponent conductivity clogging layer	-	5
$H_{ini}$	Water level in river	m	0.1
$h_f^{ini}$	Initial head in the aquifer river cell	m	20.7

354 Table 1. Parameters of the system

355 The minimum grid size must be  $8\bar{D}_{aq} + 4B$ . In this case the cell size should

356 equal or exceed  $160 + 20 = 180$  m. Nevertheless the grid size is chosen

357 conservatively to be 200 m. The excess far distance is  $\frac{G}{4} - B - 2\frac{D_{aq}}{1} = 200/4$

358  $- 5 - 2(20) = 5$

359 Figure 6 displays the evolution of the head in the river, the mound and the

360 river cell. To facilitate the interpretation of the results the river stage is


361 maintained constant at a value of 0.1 m. Thus affecting the evolution of

362 seepage and recharge is the variation of the head in the river cell. It varies in

363 such a way that at times the hydraulic connection between the river and the

364 aquifer is saturated and at other times it is unsaturated. As long as the

365 connection is saturated the head in the river cell and in the mound below the  
 366 river bottom are the same.

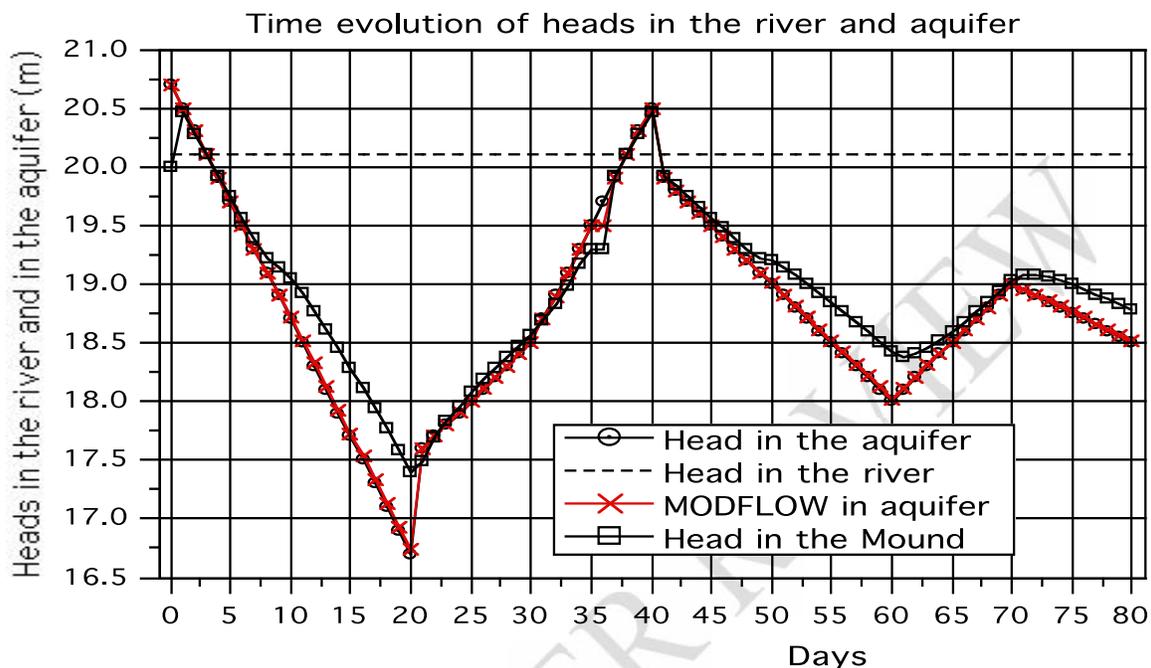


367  
 368 Figure 6. Heads in the river, the mound and the aquifer cell.

369 At first the river is gaining from the aquifer as the head in the aquifer exceeds  
 370 the river stage. The seepage is algebraically negative in that case as Figure 7  
 371 shows. At time 20 the head which had been declining starts to rise.

372 It rises so much that by time 35 resaturation is taking place and by time 38 the  
 373 river is gaining from the aquifer. Then it declines again and by time 49  
 374 desaturation occurs and it remains the condition till the end of the simulation.

375 In the case of MODFLOW there is no distinction between seepage and  
 376 recharge. It is assumed that the seepage rate instantly recharges the aquifer  
 377 cell below the river bottom as shown in Figure 7.

378

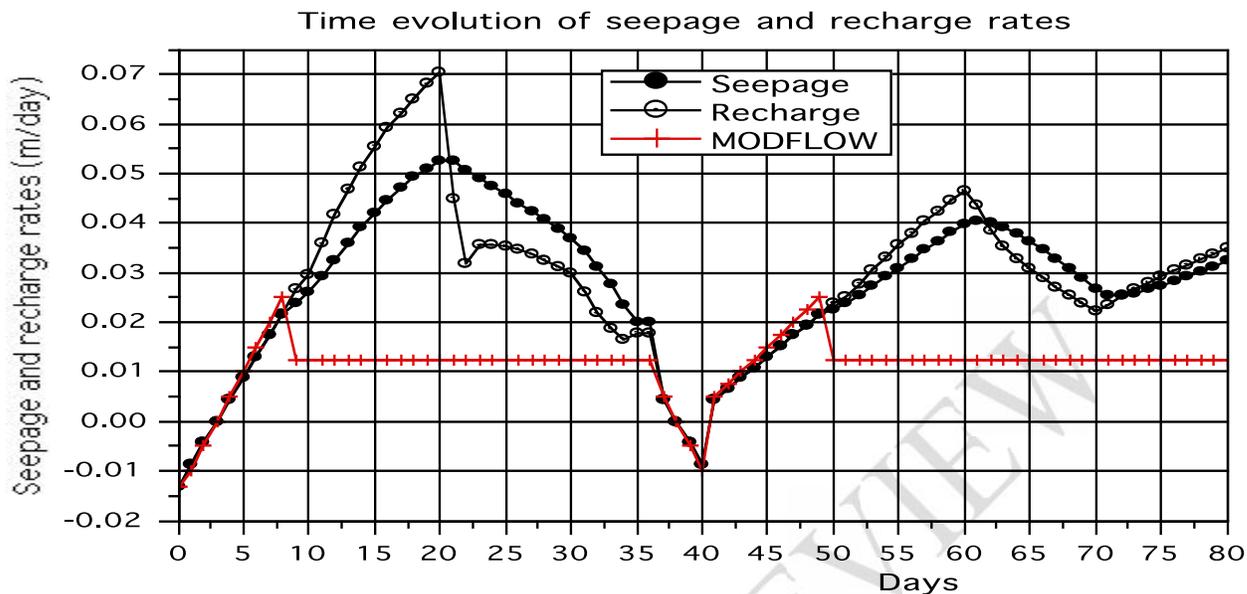


379

380 Figure 7. Seepage from the river and recharge rate to the aquifer.

381 Figure 8 displays the evolution of capillary pressure at the interface.

382 Whenever that value exceeds the entry pressure (0.30 m) seepage is

383 occurring under an unsaturated connection,

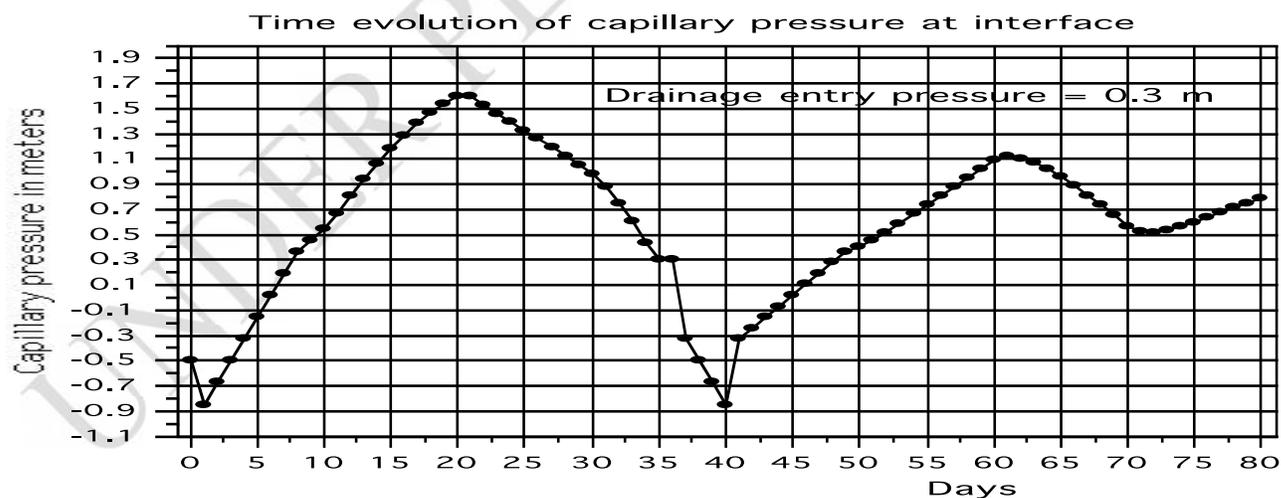

384

385 Figure 8. Capillary pressure at interface.


386 At time 8 the capillary pressure exceeds the entry pressure (0.3 m), the connection

387 becomes unsaturated and recharge now exceeds the seepage as a result of

388 drainage of moisture below the riverbed.

389 Figure 9 shows the water content distribution within the unsaturated zone with

390 time.

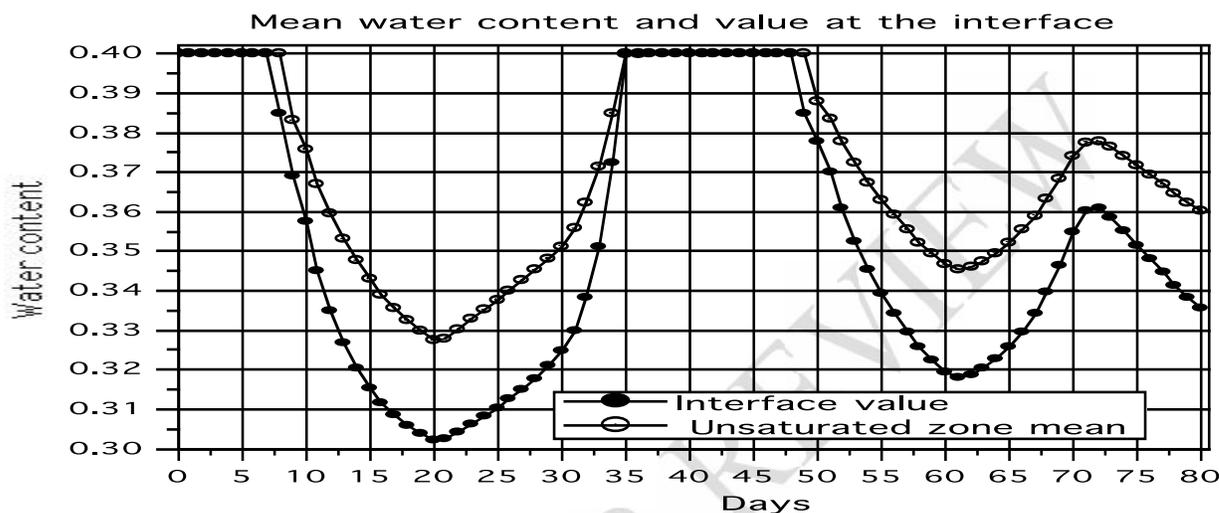

391

392 Figure 9. Average water content in the unsaturated zone and value at interface.

393 (Table 1 in Appendix 5 online summarizes the results and provides a

394 glossary of terms).

### 395 **5. Discussion**

396 For this particular set of parameters, given that a very tight clogging layer exists,

397 under a saturated condition the predictions between MODFLOW and the

398 proposed method are very close. In this case MODFLOW's assumption that all

399 the resistance is taking place vertically through the clogging layer (and none to

400 allow for the flow to turn from a vertical to a horizontal direction) is practically

401 correct. However when the connection becomes unsaturated then the difference

402 is major. The assumption that the head drop driving the flow is the head

403 difference between the river and the elevation of the bottom of the riverbed is  
404 not valid. The location of the water-table mound below the riverbed does have  
405 an impact on the seepage rate.

406 A major problem with these old methods is the basic assumption that the flow is  
407 driven by a difference of head between the river and an average head in a river  
408 cell whose dimensions are large compared to the width of the river. Clearly the  
409 head difference should be with a head in the aquifer that is close to the bottom of  
410 the river. Under an unsaturated connection it should be quite clear that the  
411 relevant head is not the average head in a huge river cell but the head of the  
412 water-table mound present below the riverbed.

413 If a single leakance coefficient is used under saturated or unsaturated connection  
414 as is done here for the estimation by MODFLOW's approach then clearly it  
415 cannot be accurate under all circumstances. With the new approach presented  
416 here that leakance coefficient is constantly changing based on the physical  
417 situation and the prevailing circumstances, as demonstrated in the numerical  
418 example..

## 419 **6. Conclusion**

420 Many previous studies have shown that the early methodology to estimate the  
421 flow interaction between a river and a connected aquifer, as described in a  
422 number of manuals, was not very physically based. Yet that methodology is still

423 much in used today, particularly in large-scale regional studies. That situation is  
424 especially critical when the connection becomes unsaturated and the situation  
425 alternates between the two conditions. An alternative approach is presented  
426 which has a sound physical basis and allows the situation to alternate between  
427 a saturated and unsaturated connection. This is done with recourse to simple  
428 analytical procedures and avoids reliance on complex and time-consuming  
429 numerical solutions of the two-dimensional unsaturated flow equations.

430 Because in this article the emphasis is on the estimation of seepage and recharge  
431 the river stage and the aquifer river cell are treated as the decision variables.  
432 That way comparison with MODFLOW is not obscured by the influence of  
433 many other factors. In actual studies they are not decision variables but rather  
434 state variables depending on routing of flow in the river and the influence of  
435 adjacent cells in a large system. Other articles have already suggested more  
436 efficient analytical routing procedures and how to treat the river cell head as a  
437 state variable depending on the recharge from the river and the influence of the  
438 heads in the adjacent cells and more articles will explore these aspects and  
439 publish them in greater details in the future.

## 440 **7. Bibliography**

441 Hanson, R. 2017. Salinas Valley Integrated Modeling of Agricultural  
442 Conjunctive Use. California Water and Environmental Modeling Forum

- 443 Annual Meeting, March 20-22, 2017, Folsom, California.
- 444 McDonald, M., and A. Harbaugh. 1988. A modular three-dimensional finite-  
445 difference ground-water flow model: Techniques of Water-Resources  
446 Investigations of the United States Geological Survey, Book 6, Chapter A1.
- 447 Miracapillo, C., and H. J. Morel-Seytoux. 2014. Analytical solutions for stream-  
448 aquifer flow exchange under varying head asymmetry and river penetration:  
449 Comparison to numerical solutions and use in regional groundwater models,  
450 *Water Resour. Res.*, 50, doi:10.1002/2014WR015456.
- 451 Morel-Seytoux, H.J., 2009. The Turning Factor in the Estimation of Stream-  
452 Aquifer Seepage. *Ground Water Journal*, doi: 10.1111/j.1745-  
453 6584.2008.00512.x
- 454 Morel-Seytoux, H.J. , Calvin D. Miller, Cinzia Miracapillo and Steffen Mehl  
455 (2016). River Seepage Conductance in Large-Scale Regional Studies.  
456 November 2016. ©2016, National GroundWater Association, doi:  
457 10.1111/gwat.12491
- 458 Morel-Seytoux, H.J. , C. Miracapillo and S. Mehl. 2015. Impact of aquifer  
459 desaturation on steady-state river seepage. *Adv Water Resources*. 2015, 88,  
460 21-31, doi.org/10.1016/j.advwatres.2015.09.012
- 461 Morel Seytoux, H. J., S. Mehl, and K. Morgado. 2014. Factors influencing the  
462 stream aquifer flow exchange coefficient. *Groundwater*. 52(5), 775-781.

463 Rushton, K. 2007. Representation in regional models of saturated river-  
 464 aquifer interaction for gaining/losing rivers. *Journal of Hydrology* 334: 262–  
 465 281.

466 Woolfenden, L.R., and T. Nishikawa. 2014. Simulation of groundwater and  
 467 surface-water resources of the Santa Rosa Plain Watershed, Sonoma County,  
 468 California. USGS Scientific Investigation Report 2014–5052, 241 p.

469

#### 470 **Appendix 1. Using the Brooks-Corey formulation**

471 Normalized water content is defined as:

$$472 \quad \theta^* = \frac{\theta - \theta_r}{\theta_s - \theta_r} \quad (1)$$

473 Capillary pressure (head),  $h_c$ , expressed as an equivalent water height is  
 474 represented in the unsaturated zone by a power law (Brooks-Corey, BC) as:

$$475 \quad h_c = h_{ce} (\theta^*)^{-M} \quad (2)$$

476 where  $h_{ce}$  is the entry pressure. In the BC original notations a parameter  $l$   
 477 is used and  $M$  is simply the inverse of  $l$ ) That capillary pressure is positive  
 478 in the unsaturated zones and in the capillary fringes.  $h_{cl}$  denotes the  
 479 capillary pressure at the interface between the bottom of the clogging layer  
 480 and the aquifer below. This pressure is continuous across the interface.

481 Relative permeability,  $k_{rw}$ , in the unsaturated zone is defined by a power law  
 482 as:

$$483 \quad k_{rw} = (q^*)^p \quad (3)$$

484 In the BC original notations a power  $e = \frac{h}{l}$  is used which is simply p.

485 Note that the power p is always much greater than M. BC suggested a  
 486 relation between p and M,  $p = 3 + 2M$ . Actually p can be less than 3 so this  
 487 is a rough approximation. Then

$$488 \quad k_{rw} = (q^*)^p \quad (4a) \text{ for } h_c \geq h_{ce}$$

$$489 \quad k_{rw} = 1 \quad (4b) \text{ for } h_c < h_{ce}$$

$$490 \quad \left(\frac{h_c}{h_{ce}}\right) = (q^*)^{-M} \quad (5a) \text{ for } h_c \geq h_{ce}$$

$$491 \quad \text{or vice versa } q^* = \left(\frac{h_c}{h_{ce}}\right)^{-\frac{1}{M}} \quad (5b)$$

$$492 \quad \text{Also } k_{rw} = \left(\frac{h_c}{h_{ce}}\right)^{-\frac{p}{M}} \quad (6a) \text{ for } h_c \geq h_{ce}$$

$$493 \quad \text{and } k_{rw} = 1 \quad (6b) \text{ otherwise.}$$

494 **Appendix 2. Steady-state unsaturated seepage water content**  
 495 **profile**

496 Darcy's equation:  $v^* = \frac{v}{K_V} = k_{rw} \left[ \frac{h_{ce} dh_c^*}{dz} + 1 \right]$  (1)

497 Expressing  $k_{rw}$  as a function of  $h_c$ :

498  $k_{rw} = (h_c^*)^{-a} \frac{p}{M} = (h_c^*)^{-a}$  (2)

499 Substitution in Eq.(1) yields:

500  $v^* = (h_c^*)^{-a} \left[ \frac{h_{ce} dh_c^*}{dz} + 1 \right]$  or  $\frac{v^* - (h_c^*)^{-a}}{(h_c^*)^{-a}} = \frac{h_{ce} dh_c^*}{dz}$  (3)

501 Separation of variables yields:

502  $\frac{(h_c^*)^{-a} dh_c^*}{v^* - (h_c^*)^{-a}} = \frac{dz}{h_{ce}}$  (4)

503 Let  $x = h_c^* \sqrt{v^*}$  then  $h_c^* = x / \sqrt{v^*}$  and  $dh_c^* = \frac{dx}{\sqrt{v^*}}$

504 Substitution in Eq.(4) yields:

505  $\frac{\left(\frac{x}{\sqrt{v^*}}\right)^{-a} \frac{dx}{\sqrt{v^*}}}{v^* - \left(\frac{x}{\sqrt{v^*}}\right)^{-a}} = \frac{dz}{h_{ce}}$  (5)

506 In case  $a = 2$

507  $\frac{\left(\frac{v^*}{x^2}\right) \frac{dx}{\sqrt{v^*}}}{v^* - \frac{v^*}{x^2}} = \frac{dz}{h_{ce}}$  or  $\frac{dx}{x^2 \sqrt{v^*}} = \frac{dz}{h_{ce}}$  or  $\frac{dx}{1 - x^2} = -\sqrt{v^*} \frac{dz}{h_{ce}}$  (6)

508 Note that Eq.(4) is also integrable exactly for values of  $a$  equal to 3

509 and 4. Integration of Eq.(5b) between the limits  $h_c^* \sqrt{v^*}$  and  $h_{cI}^* \sqrt{v^*}$  yields:

$$510 \quad \frac{1}{2} \ln \left( \frac{1+x}{1-x} \right) \Big|_{h_c^* \sqrt{v^*}}^{h_{cI}^* \sqrt{v^*}} = \frac{\sqrt{v^*} z}{h_{ce}} \quad (7)$$

511 or ultimately:

$$512 \quad \frac{1}{2} \ln \left\{ \left( \frac{1+h_{cI}^* \sqrt{v^*}}{1+h_c^* \sqrt{v^*}} \right) \left( \frac{1-h_c^* \sqrt{v^*}}{1-h_{cI}^* \sqrt{v^*}} \right) \right\} = \frac{\sqrt{v^*}}{h_{ce}} z \quad (8)$$

513 When  $h_c^* = 1$ , one is at the top of the capillary fringe and then:

$$514 \quad \frac{1}{2} \ln \left\{ \left( \frac{1+h_{cI}^* \sqrt{v^*}}{1+\sqrt{v^*}} \right) \left( \frac{1-\sqrt{v^*}}{1-h_{cI}^* \sqrt{v^*}} \right) \right\} = \frac{\sqrt{v^*}}{h_{ce}} z_f \quad (9)$$

$$515 \quad \text{Defining: } D_z = \ln \left\{ \left( \frac{1+h_{cI}^* \sqrt{v^*}}{1+\sqrt{v^*}} \right) \left( \frac{1-\sqrt{v^*}}{1-h_{cI}^* \sqrt{v^*}} \right) \right\} \quad (10)$$

516 and dividing Eq.(8) by Eq.(9) one obtains:

$$517 \quad z^* = \frac{z}{z_f} = \ln \left\{ \left( \frac{1+h_{cI}^* \sqrt{v^*}}{1+h_c^* \sqrt{v^*}} \right) \left( \frac{1-h_c^* \sqrt{v^*}}{1-h_{cI}^* \sqrt{v^*}} \right) \right\} / D_z \quad (11)$$

518 which solved for the normalized capillary pressure yields:

$$519 \quad h_c^* = \frac{1+h_{cI}^* \sqrt{v^*} - e^{D_z z^*} (1-h_{cI}^* \sqrt{v^*})}{\sqrt{v^*} [1+h_{cI}^* \sqrt{v^*} + e^{D_z z^*} (1-h_{cI}^* \sqrt{v^*})]} \quad (12)$$

520 One can verify that for  $z^* = 0$  one obtains correctly  $h_c^* = h_{cI}^*$ . For  $z^* = 1$  one

521 obtains also correctly  $h_c^* = 1$ . That follows from the very definition of the

522 parameter  $D_z$ .

523 If  $v^* < 0$  let  $\tan(h_{cI}^* \sqrt{-v^*}) = A$ ,  $\tan(\sqrt{-v^*}) = P$  and  $D_z = A - P$

524 The relation between normalized capillary pressure and normalized  
 525 unsaturated zone coordinate  $z^* = \frac{z}{z_f}$  is:

$$526 \quad z^* = \frac{A - \tan(h_c^* \sqrt{-v^*})}{D_z} \text{ or } h_c^* = \frac{\tan^{-1}[A - D_z z^*]}{\sqrt{-v^*}}$$

527 while the full thickness of the unsaturated zone is:  $z_f = \frac{h_{ce} D_z}{\sqrt{-v^*}}$

### 528 **Appendix 3. Initial conditions.**

#### 529 **3.1 Hydrostatic condition.**

530 At initial incipient desaturation the seepage (infiltration) flux (area per time)  
 531 through the interface on one side is:

$$532 \quad (B + H) i_S^{ini} = (B + H) K_{rcl} \left[ \frac{h_{ce} + H + e_{rcl}}{e_{rcl}} \right] \quad (1)$$

533 where  $B$  is half the width of the river bottom,  $K_{rcl}$  is the conductivity of a  
 534 (real) clogging layer,  $e_{rcl}$  its thickness, and  $H$  the water depth in the river.

535 The flux transmitted out of the mound into the river cell (e.g. Morel-Seytoux  
 536 et al., 2014; Morel-Seytoux, 2009) is:

$$537 \quad K_H G(z_{rf} - h_f) = (B + H) i_S^{ini} \quad (2)$$

538 where  $\Gamma$  is the SAFE dimensionless conductance (Morel-Seytoux et al.,  
 539 2016),  $K_H$  is the aquifer horizontal conductivity and  $h_f$  is the head in the part  
 540 of the half river cell away from the river bank.

541 At incipient desaturation, since  $z_f=0$ ,  $z_{rf}^{ini} = D - e_{rcl} - h_{ce} \quad (3)$

542 and it follows from Eq.(2) that

$$h_f^{ini} = z_{rf}^{ini} - \frac{(B+H)i_S^{ini}}{K_H G} \quad (4)$$

543 These are possible chosen initial conditions in the river and the aquifer so  
544 that simulation starts at incipient desaturation time and continues  
545 unsaturated.

### 546 3.2 Hydrostatic condition.

$$547 \quad i_S^{ini} = \frac{K_H G (h_S^{ini} - h_f^{ini})}{B + H^{ini}} z_f^{ini} = 0 \quad z_{rf}^{ini} = h_f^{ini} - e_{rcl} \quad (1) \quad z_f^{ini} = 0 \quad (2)$$

$$548 \quad z_{rf}^{ini} = D - e_{rcl} - h_{ce} \quad (3)$$

$$549 \quad i_S^{ini} = 0 = v_{rech}^{ini} \quad (4) \quad h_{cl}^{ini} = -(H_{ini} + e_{rcl}) \quad (5)$$

### 550 3.3 General saturated condition

551 In this case  $h_S^{ini} = D + H_{ini}$  (1)  $h_f^{ini} = D + l$  (2) where  $l$  is an arbitrary  
552 number but greater than the negative of the entry pressure  $-h_{ce} \notin l$  so that no  
553 unsaturated zone exists below the riverbed at initial time.

$$554 \quad i_S^{ini} = \frac{K_H G (h_S^{ini} - h_f^{ini})}{B + H^{ini}} \quad (3) \quad z_f^{ini} = 0 \quad (4) \quad z_{rf}^{ini} = h_f^{ini} - e_{rcl} - h_{ce} \quad (5)$$

555

### 556 Appendix 4. Constant C Linear Reservoir type equation with a right

### 557 hand-side excitation varying linearly in time.

558 The excitation varies linearly in time and thus the basic governing equation

559 is: 
$$C \frac{dU}{dt} + U = E_o + (E_n - E_o)t \quad (1)$$

560 We look for a solution of the form: 
$$U(t) = A + Mt + De^{-\frac{t}{c}} \quad (2)$$

561 
$$\frac{dU(t)}{dt} = M - \frac{D}{C} e^{-\frac{t}{c}} \quad (3).$$
 Substitution in Eq.(1) yields:

562 
$$C(M - \frac{D}{C} e^{-\frac{t}{c}}) + [A + Mt + De^{-\frac{t}{c}}] = E_o + (E_n - E_o)t \quad (4)$$

563 Satisfaction of the equation requires that:  $M = (E_n - E_o)$  (5) and

564 
$$A = E_o - C(E_n - E_o) \quad (6)$$

565 Substitution in Eq.(2) yields:

566 
$$U(t) = E_o - C(E_n - E_o) + (E_n - E_o)t + De^{-\frac{t}{c}} \quad (7)$$

567 At time zero then:  $U(0) = E_o - C(E_n - E_o) + D$  (8) which yields D.

568 Substitution in Eq.(7) yields:

569 
$$U(t) = U(0)e^{-\frac{t}{c}} + [E_o - C(E_n - E_o)](1 - e^{-\frac{t}{c}}) + (E_n - E_o)t \quad (9)$$

570 Application for end of period n making  $t = 1$  and setting  $r_U = e^{-\frac{1}{c}}$  (10)

571 yields:

572 
$$U(n) = r_U U(n-1) + (1 - r_U) \{E(n-1) - C[E(n) - E(n-1)]\} + [E(n) - E(n-1)]$$

573 (11)

574 Grouping terms:

$$575 \quad U(n) = r_U U(n-1) + \{(1 - r_U)(1 + C) - 1\} E(n-1) + \{1 - C(1 - r_U)\} E(n)$$

576 (12) or

$$577 \quad U(n) = r_U U(n-1) + [C(1 - r_U) - r_U] E(n-1) + [1 - C(1 - r_U)] E(n) \quad (13)$$

$$578 \quad \text{with } a_U = [C(1 - r_U) - r_U] \quad (14a) \quad b_U = [1 - C(1 - r_U)] \quad (14b)$$

$$579 \quad \text{then Eq.(13) becomes: } U(n) = r_U U(n-1) + a_U E(n-1) + b_U E(n) \quad (15)$$

## 580 **Appendix 5. Tabulated results for the numerical example**

581 Name of the file unsatseep#22\_results\_2018.mpw. It was run on December  
582 13, 2018

583

584 JUNSAT is index to indicate if condition is currently unsaturated or  
585 saturated seepage (abbreviated in Table as simply JU)

586 JUNSAT = 1 means unsaturated case

587 JUNSAT = - 1 means saturated case

588

589 All lengths are in units of meters.

590 Distance from bottom of river (top of clogging layer) to aquifer

591 impervious bottom  $D = 20.0$  m

592 Grid size is GRID = 200.0 m

593 Initial condition for this run is one of general saturated condition.

594 Initial head in

595 the aquifer is 20.7 m. Initially the river is gaining from the aquifer.

596 So one can see that at time (day) = 8 the condition starts again as

597 desaturated case

598 ZF is the thickness of the unsaturated zone (that does not include the  
599 capillary fringe)

600 HSTAGE is the head in the river. The datum for all heads are the

601 bottom of the aquifer.

602 River stage in the river is maintained constant at a value of 0.1 m.

603 Thus head in the river

604 is maintained constant at a value of 20.1 m

605 ZRF is the elevation of the top of the water-table mound

606 HF is the head in the part of the river cell that excludes the river

607 AIS is the seepage rate (velocity) at the bottom of the river bed

608 AISRP is meant to be the seepage rate using MODFLOW's approach

609 (simplest River Package).

610 AISRP is the MODFLOW seepage rate (velocity) at the bottom of the river  
611 bed. It is also the recharge rate.

612 VRECH is the recharge rate into the mound.

613

614 Parameters for the run are KH (horizontal conductivity) = 2.5 m/day,

615 AKRCL (real clogging layer conductivity) = 0.01 m/day

616 ERCL (real clogging layer thickness) = 0.4 m

617 Drainage entry pressure HCE = 0.30 m  
 618 Capillary pressure power exponent M = 2.5  
 619 Relative conductivity power exponent p = 5.0  
 620 Saturated water content WCSAT = 0.4; Residual water content WCRES = 0.2  
 621 Effective porosity of aquifer PHIEFFEC = 0.2

622  
 623 unsatseep#22\_results\_2018.mp  
 624

DAY	JU	HCI	ZF	HSTAGE	ZRF	HF	HFRP	AISRP	AIS	VRECH	WCI	WC	
625	0	-1	-0.5000	0.0000	20.1000	20.0000	20.7000	20.7000	-0.130	-0.130	-0.130	0.4000	0.4000
626	1	-1	-0.8477	0.0000	20.1000	20.4584	20.5000	20.5000	-0.100	-0.087	-0.087	0.4000	0.4000
627	2	-1	-0.6737	0.0000	20.1000	20.2790	20.3000	20.3000	-0.050	-0.043	-0.043	0.4000	0.4000
628	3	-1	-0.5000	0.0000	20.1000	20.1000	20.1000	20.1000	0.0000	0.0000	0.0000	0.4000	0.4000
629	4	-1	-0.3265	0.0000	20.1000	19.9214	19.9000	19.9000	0.0050	0.0043	0.0043	0.4000	0.4000
630	5	-1	-0.1533	0.0000	20.1000	19.7431	19.7000	19.7000	0.0100	0.0087	0.0087	0.400	0.4000
631	6	-1	0.0197	0.0000	20.1000	19.5653	19.5000	19.5000	0.0150	0.0130	0.0130	0.400	0.4000
632	7	-1	0.1923	0.0000	20.1000	19.3878	19.3000	19.3000	0.0200	0.0173	0.0173	0.400	0.4000
633	8	1	0.3647	0.0892	20.1000	19.2108	19.1000	19.1000	0.0250	0.0216	0.0216	0.385	0.4000
634	9	1	0.4559	0.1585	20.1000	19.1415	18.9000	18.9123	0.0125	0.0239	0.0266	0.369	0.3831
635	10	1	0.5444	0.2501	20.1000	19.0499	18.7000	18.7178	0.0125	0.0261	0.0295	0.357	0.3758
636	11	1	0.6705	0.3843	20.1000	18.9157	18.5000	18.5212	0.0125	0.0293	0.0358	0.345	0.3672
637	12	1	0.8047	0.5333	20.1000	18.7667	18.3000	18.3238	0.0125	0.0326	0.0416	0.334	0.3596
638	13	1	0.9379	0.6906	20.1000	18.6094	18.1000	18.1260	0.0125	0.0359	0.0468	0.326	0.3531
639	14	1	1.0649	0.8531	20.1000	18.4469	17.9000	17.9279	0.0125	0.0391	0.0514	0.320	0.3477
640	15	1	1.1825	1.0191	20.1000	18.2809	17.7000	17.7296	0.0125	0.0421	0.0555	0.315	0.3430
641	16	1	1.2888	1.1879	20.1000	18.1121	17.5000	17.5312	0.0125	0.0447	0.0591	0.311	0.3390
642	17	1	1.3834	1.3592	20.1000	17.9408	17.3000	17.3327	0.0125	0.0471	0.0622	0.308	0.3356
643	18	1	1.4667	1.5343	20.1000	17.7657	17.1000	17.1339	0.0125	0.0492	0.0651	0.306	0.3326
644	19	1	1.5404	1.7172	20.1000	17.5828	16.9000	16.9348	0.0125	0.0510	0.0680	0.303	0.3299
645	20	1	1.6046	1.9072	20.1000	17.3928	16.7000	16.7353	0.0125	0.0526	0.0705	0.302	0.3275
646	21	1	1.5971	1.8126	20.1000	17.4874	17.6000	17.5943	0.0125	0.0524	0.0450	0.302	0.3278
647	22	1	1.5293	1.6074	20.1000	17.6926	17.7000	17.6996	0.0125	0.0507	0.0318	0.304	0.3303
648	23	1	1.4609	1.4664	20.1000	17.8336	17.8000	17.8017	0.0125	0.0490	0.0355	0.306	0.3328
649	24	1	1.3941	1.3379	20.1000	17.9621	17.9000	17.9032	0.0125	0.0474	0.0355	0.308	0.3352
650	25	1	1.3280	1.2229	20.1000	18.0771	18.0000	18.0039	0.0125	0.0457	0.0353	0.310	0.3376
651	26	1	1.2616	1.1164	20.1000	18.1836	18.1000	18.1043	0.0125	0.0440	0.0347	0.312	0.3400
652	27	1	1.1940	1.0156	20.1000	18.2844	18.2000	18.2043	0.0125	0.0423	0.0337	0.315	0.3426
653	28	1	1.1244	0.9185	20.1000	18.3815	18.3000	18.3042	0.0125	0.0406	0.0326	0.317	0.3453
654	29	1	1.0525	0.8239	20.1000	18.4761	18.4000	18.4039	0.0125	0.0388	0.0312	0.321	0.3482
655	30	1	0.9782	0.7310	20.1000	18.5690	18.5000	18.5035	0.0125	0.0370	0.0298	0.324	0.3513
656	31	1	0.8812	0.6151	20.1000	18.6849	18.7000	18.6992	0.0125	0.0345	0.0262	0.330	0.3558
657	32	1	0.7530	0.4706	20.1000	18.8294	18.9000	18.8964	0.0125	0.0313	0.0218	0.338	0.3624
658	33	1	0.6028	0.3098	20.1000	18.9902	19.1000	19.0944	0.0125	0.0276	0.0187	0.351	0.3716
659	34	1	0.4353	0.1370	20.1000	19.1630	19.3000	19.2930	0.0125	0.0234	0.0166	0.372	0.3849
660	35	1	0.3002	0.0013	20.1000	19.2987	19.5000	19.4897	0.0125	0.0200	0.0179	0.399	0.4000
661	36	-1	0.3002	0.0013	20.1000	19.2987	19.7000	19.4897	0.0125	0.0200	0.0179	0.399	0.4000
662	37	-1	-0.3268	0.0000	20.1000	19.9218	19.9000	19.9000	0.0050	0.0043	0.0043	0.400	0.4000
663	38	-1	-0.5000	0.0000	20.1000	20.1000	20.1000	20.1000	0.0000	0.0000	0.0000	0.400	0.4000
664	39	-1	-0.6735	0.0000	20.1000	20.2786	20.3000	20.3000	-0.050	-0.043	-0.043	0.400	0.4000
665	40	-1	-0.8472	0.0000	20.1000	20.4576	20.5000	20.5000	-0.100	-0.087	-0.087	0.400	0.4000
666	41	-1	-0.3263	0.0000	20.1000	19.9210	19.9000	19.9000	0.0050	0.0043	0.0043	0.400	0.4000
667	42	-1	-0.2400	0.0000	20.1000	19.8323	19.8000	19.8000	0.0075	0.0065	0.0065	0.400	0.4000
668	43	-1	-0.1534	0.0000	20.1000	19.7433	19.7000	19.7000	0.0100	0.0087	0.0087	0.400	0.4000
669	44	-1	-0.0669	0.0000	20.1000	19.6544	19.6000	19.6000	0.0125	0.0108	0.0108	0.400	0.4000
670	45	-1	0.0195	0.0000	20.1000	19.5656	19.5000	19.5000	0.0150	0.0130	0.0130	0.400	0.4000
671	46	-1	0.1058	0.0000	20.1000	19.4769	19.4000	19.4000	0.0175	0.0151	0.0151	0.400	0.4000
672	47	-1	0.1921	0.0000	20.1000	19.3882	19.3000	19.3000	0.0200	0.0173	0.0173	0.400	0.4000
673	48	-1	0.2783	0.0000	20.1000	19.2997	19.2000	19.2000	0.0225	0.0195	0.0195	0.400	0.4000
674	49	1	0.3644	0.0887	20.1000	19.2113	19.1000	19.1000	0.0250	0.0216	0.0216	0.385	0.4000
675	50	1	0.4028	0.1041	20.1000	19.1959	19.0000	19.0100	0.0125	0.0226	0.0238	0.377	0.3881
676	51	1	0.4507	0.1531	20.1000	19.1469	18.9000	18.9126	0.0125	0.0238	0.0250	0.370	0.3835
677	52	1	0.5175	0.2221	20.1000	19.0779	18.8000	18.8142	0.0125	0.0254	0.0278	0.360	0.3779
678	53	1	0.5901	0.2980	20.1000	19.0020	18.7000	18.7154	0.0125	0.0273	0.0305	0.352	0.3725
679	54	1	0.6646	0.3775	20.1000	18.9225	18.6000	18.6164	0.0125	0.0291	0.0332	0.345	0.3675
680	55	1	0.7393	0.4589	20.1000	18.8411	18.5000	18.5174	0.0125	0.0310	0.0357	0.339	0.3631
681	56	1	0.8130	0.5416	20.1000	18.7584	18.4000	18.4183	0.0125	0.0328	0.0380	0.334	0.3592
682	57	1	0.8852	0.6253	20.1000	18.6747	18.3000	18.3191	0.0125	0.0346	0.0403	0.329	0.3556
683	58	1	0.9555	0.7098	20.1000	18.5902	18.2000	18.2199	0.0125	0.0364	0.0424	0.325	0.3523
684	59	1	1.0234	0.7951	20.1000	18.5049	18.1000	18.1207	0.0125	0.0381	0.0445	0.322	0.3494
685	60	1	1.0887	0.8812	20.1000	18.4188	18.0000	18.0214	0.0125	0.0397	0.0465	0.319	0.3467
686	61	1	1.1191	0.9199	20.1000	18.3801	18.1000	18.1143	0.0125	0.0405	0.0437	0.318	0.3455
687	62	1	1.1050	0.8970	20.1000	18.4030	18.2000	18.2104	0.0125	0.0401	0.0384	0.318	0.3460
688	63	1	1.0689	0.8475	20.1000	18.4525	18.3000	18.3078	0.0125	0.0392	0.0353	0.320	0.3475
689	64	1	1.0179	0.7813	20.1000	18.5187	18.4000	18.4061	0.0125	0.0379	0.0328	0.3227	0.3496
690	65	1	0.9567	0.7055	20.1000	18.5945	18.5000	18.5048	0.0125	0.0364	0.0307	0.325	0.3523
691	66	1	0.8881	0.6240	20.1000	18.6760	18.6000	18.6039	0.0125	0.0347	0.0288	0.329	0.3554
692	67	1	0.8138	0.5391	20.1000	18.7609	18.7000	18.7031	0.0125	0.0328	0.0271	0.334	0.3591
693	68	1	0.7353	0.4521	20.1000	18.8479	18.8000	18.8024	0.0125	0.0309	0.0254	0.339	0.3634
694	69	1	0.6533	0.3638	20.1000	18.9362	18.9000	18.9018	0.0125	0.0288	0.0238	0.346	0.3683
695	70	1	0.5686	0.2745	20.1000	19.0255	19.0000	19.0013	0.0125	0.0267	0.0223	0.354	0.3740

696	71	1	0.5211	0.2254	20.1000	19.0746	18.9500	18.9564	0.0125	0.0255	0.0234	0.360	0.3776
697	72	1	0.5174	0.2218	20.1000	19.0782	18.9000	18.9091	0.0125	0.0254	0.0253	0.360	0.3779
698	73	1	0.5357	0.2408	20.1000	19.0592	18.8500	18.8607	0.0125	0.0259	0.0267	0.358	0.3764
699	74	1	0.5652	0.2717	20.1000	19.0283	18.8000	18.8116	0.0125	0.0266	0.0280	0.355	0.3742
700	75	1	0.6000	0.3083	20.1000	18.9917	18.7500	18.7623	0.0125	0.0275	0.0292	0.351	0.3718
701	76	1	0.6372	0.3477	20.1000	18.9523	18.7000	18.7129	0.0125	0.0284	0.0304	0.348	0.3693
702	77	1	0.6753	0.3887	20.1000	18.9113	18.6500	18.6633	0.0125	0.0294	0.0316	0.344	0.3669
703	78	1	0.7138	0.4304	20.1000	18.8696	18.6000	18.6137	0.0125	0.0303	0.0327	0.341	0.3646
704	79	1	0.7522	0.4726	20.1000	18.8274	18.5500	18.5641	0.0125	0.0313	0.0338	0.338	0.3624
705	80	1	0.7903	0.5152	20.1000	18.7848	18.5000	18.5145	0.0125	0.0323	0.0349	0.335	0.3603
706													
707													
708													
709													
710													

UNDER PEER REVIEW