

1 **Parametric Investigation and Optimization of the Newly Developed Pant**  
2 **Loading Ramp Machine**

3  
4 Kumkum Pandey and Deepa Vinay

5 SRF and Professor & Head

6 Deptt. of Family Resource Management, College of Home Science

7 G.B.P.U.A.&T., Pantnagar-263145, Uttarakhand, India

8 Email id: kumkum.pandey.unique@gmail.com  
9

10 **ABSTRACT**

11 Objective of the current study was to optimize newly developed pant loading ramp to perform  
12 manual handling task. Pant loading ramp was 19 feet in length, having width of 2 feet, anti-  
13 slippery, easy to move due to provision of rotating wheels, adjustable at varying heights of  
14 the loading vehicle (between 2.5-5 feet) and reduces the loading time up to 30 minutes. For  
15 this purpose experiments were conducted on a group of 20 experienced manual handlers in  
16 rice mills of Udham Singh Nagar district, Uttarakhand, India. The reliability and validity of  
17 the developed, loading ramp was assessed by using response surface methodology in terms of  
18 change in energy expenditure (EE), rate of perceived exertion (RPE), total cardiac cost of  
19 work (TCCW) and grip strength (GS). Therefore **Response Surface Methodology (statistical**  
20 **tools to determine the significance of a factor over a response or collection of mathematical**  
21 **and statistical techniques for empirical model building)** was applied to optimize the  
22 operating parameters of ramp such as load weight, height of ramp and time. As per Box  
23 Behenken design total 17 experiments were carried out each of which varied over three  
24 levels as load weight (40, 50 and 60 kg.), height of ramp (3, 4 and 5 feet), and time (3, 4  
25 and 5 min.). ANOVA and coefficient of determination ( $R^2$ ) test were applied. In result it  
26 was observed that use of pant loading ramp was able to reduce **Energy Expenditure (EE)** of  
27 respondents' from 14.55 kJ/min. to 11.41 kJ/min., **Rate of Perceived Exertion (RPE)** from  
28 85.45 to 20 %, **Total Cardiac Cost of Work (TCCW)** from 996.3 to 564.36 beats and **Grip**  
29 **Strength (GS)** from 47.45 to 3.30 % with overall desirability of 0.84 %. In comparison

30 with traditional method it was also found to reduce Average Working heart Rate (AWHR)  
31 (14.55-11.41), Peak Energy Expenditure (PEE) (16-12), Rate of Perceived Exertion  
32 (RPE) (85.45-20), Grip Strength (GS) (47.45-3.30) and Total Cardiac Cost of Work  
33 (TCCW) (996.3-564.35). Relative advantages showed that more than 95 % users were  
34 highly satisfied and found it advantageous.

35 Key-words: Musculoskeletal disorders ergonomics volume of oxygen uptake

## 36 INTRODUCTION

37 According to Genaidy *et al.* (2003<sup>1</sup>) operations related to manual handling include the  
38 acts of lifting, lowering, carrying, pushing, pulling, and holding items. National Institute for  
39 Occupational Safety and Health, 1997 reported that when handling and lifting items  
40 manually, there is always potential for injuries such as strains, sprains, fractures, cuts, lower  
41 back pain due to awkward postures, muscle fatigue and musculoskeletal discomforts (MSDs)  
42 problems. Among the injuries reported in industry, MSD have been recognized as one of the  
43 leading problem. Besides these, researches also show a significant linkage between  
44 musculoskeletal injuries and manual handling (Edlich *et al.*, 2005<sup>2</sup>; Hoozemans *et al.*, 1998<sup>3</sup>).  
45 It is found that manual handling injuries are a major burden to society, organizations and the  
46 sufferers themselves. The financial costs of manual handling injuries are estimated to be in  
47 the region of £2 billion a year.

48 Recent statistics from the Health and Safety Authority (2007<sup>4</sup>) indicate that, approximately  
49 one third of all reported work-related incidents are triggered by manual handling. The  
50 proportion of incidents associated with manual handling is particularly high in the wholesale  
51 and retail trade (47 %), manufacturing (40 %) and health and social care (38 %). The most  
52 common type of injury in 2006 was 'physical stress or strain to the body' (41 %) and the  
53 most frequently injured body part was the back (24 %). Health and related occupations are

54 ranked sixth in the ‘top 10 occupations of workers injured’ (Health and Safety Statistics,  
55 2012<sup>5</sup>).

56 However workers in the rice mill industry have a high risk of musculoskeletal  
57 disorders because they are principally involved in manual material handling (MMH) task.  
58 Although today the tasks or processes of industries are being mechanized, but many are still  
59 tasks are performed manually in the rice mills and the worker were sufferings from hazards  
60 like, force, awkward postures and repetitive motions that can lead to injuries, energy and time  
61 waste. Furthermore it was noted that rice mill workers were using the wooden plank for  
62 loading and unloading task which was narrow, short, non static and slippery. It was adjusted  
63 on different loading vehicle by using a drum which takes approx 35 min of time period. To  
64 avoid these problems, need was felt to redesign and develop a new loading ramp  
65 ergonomically which was able to reduce the drudgery of rice mill workers. To test the  
66 validity and reliability of pant loading ramp response surface methodology (RSM) was used.  
67 Thus the objectives of the present study were to verify the newly developed pant loading  
68 ramp by using the RSM statistical technique and to evaluate the relative advantages.

## 69 MATERIALS AND METHODS

70 In this study, the researcher observed the prevailing working environment and tool  
71 (wooden plank) for a period of 1 year that was used by the workers. After detailed analysis of  
72 wooden plank and it’s functionality an urgent need was felt to redesign and development of a  
73 new pant loading ramp. Thus newly developed pant loading ramp (length of 19 feet, width of  
74 2 feet and adjustable between 2.5-5 feet) was statistically tested by conducting the  
75 experiments of RSM technique and thereafter its acceptability was rated by taking the  
76 responses of workers. To fulfil this objective subjects were familiarized with the  
77 experimental procedure and some personal and physiological variables of the workers were

78 also taken. For this study ethical approval was taken from ethical committee of G.B. Pant  
79 University of Agriculture and Technology, Pantnagar, Uttarakhand, India.

80 **Subjects:** A group of 20 male subjects were recruited. These workers met the following  
81 criteria a minimum of 5 year experience, age between 20-30 years, a low lifetime incidents of  
82 injuries, involve in loading and unloading of rice sacks and had a good physical fitness. All  
83 subjects were belonging to the very low socio-economic status and never received any  
84 ergonomic training.

85 **Locale:** Study was done in the rice mills of Rudrapur block; district Udham Singh Nagar,  
86 Uttarakhand, India.

### 87 **Response surface methodology (RSM) analysis through box behenkan experiment** 88 **design**

89 Response surface methodology (RSM) is a collection of mathematical and statistical  
90 techniques for empirical model building by careful design of experiments (Sampaio *et al.*,  
91 2006<sup>6</sup>). The objective of RSM is to optimize a response (output variable) which is influenced  
92 by several independent variables (input variables) (Alvares, 2000<sup>7</sup>), (Natarajan *et al.*, 2011<sup>8</sup>).  
93 Hence, RSM technique was applied to test the efficacy of developed pant loading ramp in  
94 terms of energy expenditure (EE), rate of perceived exertion (RPE), total cardiac cost of work  
95 (TCCW) and grip strength (GS). Thus to conducting RSM analysis of the loading ramp, the  
96 selected process variables (load weight, height of ramp and time) were varied up to three  
97 levels. Load weight varied as 40, 50 and 60 kg., height of the ramp as 3, 4 and 5 feet and  
98 time was also varied as 3, 4, and 5 min. (Table 2). The Box Behenken design was used for  
99 modelling of experiments, where total seventeen experiments were conducted (Table 5).

100 The selected responses were energy expenditure (EE), total cardiac cost of work  
101 (TCCW), rate of perceived exertion (RPE) and grip strength (GS) (Table. 3) that were  
102 measured by using the formula and scales described below:

103 **Energy Expenditure (EE) (kJ/min) = 0.159X HR (beats/minute)–8.72**

104 **Total Cardiac Cost of Work (TCCW) = CCW+ CCR**

105 Cardiac Cost of Work (CCW) = AHR x Duration

106 Cardiac Cost of Recovery (CCR) = (Average Recovery HR - Average Resting HR) X  
107 Duration.

108 **Grip strength (GS):** Grip Strength was measured with the help of Digital Grip  
109 Dynamometer. It consists of a handle for handgrip connected with a spring to a pointer on the  
110 marked dial. The grip fatigue was measured by asking the subject to pull the grip handle  
111 before the start of the activity with right and left hand respectively and readings on the dial in  
112 kgs were recorded. Similar procedure was repeated immediately after the completion of the  
113 activity. Percentage decrease or increase in grip strength was calculated by the following  
114 formula.

$$115 \quad \text{Grip Strength (\%)} = \frac{Sr - Sw}{Sr} \times 100$$

116 Sr = Strength of muscle at rest and Sw = Strength of the muscle at work

117 **Rate of Perceived Exertion (RPE):** For measuring RPE Borg 5-point scale (**Borg (1998<sup>9</sup>)**)  
118 was used. i.e., very light –1, light-2, moderately heavy-3, heavy-4, very heavy-5.

119 Thereafter optimized experiments were designed with the help of design expert 8.06  
120 software. Besides this surfur software 9.0 was also employed for the graphical optimization  
121 of the multiple responses. The table, 1, 2, 3 and 4 showed the selected parameters of the study  
122 as constant, independent, dependent and process variables with their levels.

123 **Table 1: Constant parameters for optimization**

SI. no.	Parameters	Value/name
1	Back loading	-
2	Ramp length (16)	Feet

124 **Table 2: Independent variables for optimization**

SI. No.	Parameter	Level	Range
1	Load weight (kilogram)	3	40, 50, 60
2	Height (feet)	3	3, 4, 5
3	Time (minute)	3	3, 4, 5

125 **Design of experiment**

126 Design of experiment is required to extract meaningful conclusions from the  
 127 measured responses Therefore, the experimental design was performed with the help of  
 128 design expert 8.06 software and brainstorming approach as shown in Table 4 and 5.

129

130 **Table 3: Dependent variables for optimization**

SI. No.	Parameter	Value/name
1	EE (Energy Expenditure)	kJ/min.
2	RPE (Rate of Perceived Exertion)	%age
3	TCCW (Total Cardiac Cost of Work)	Beats
4	GS (Grip Strength)	%age

131

132 **Table 4: Process variable and their levels**

Independent variable Name	Code	Codes level		
		-1	0	1
		Actual level		
Load weight (kilogram)	X <sub>1</sub>	40	50	60
Height of ramp (feet)	X <sub>2</sub>	3	4	5
Time (minute)	X <sub>3</sub>	3	4	5

133

134 **Table 5: Experimental designs**

Std	Run	Factor X <sub>1</sub> Load weight (kg.)	Factor X <sub>2</sub> Height of ramp (feet)	Factor X <sub>3</sub> Time (minute)
1	17	-1.00	-1.00	0.00
2	14	1.00	-1.00	0.00
3	6	-1.00	1.00	0.00
4	13	1.00	1.00	0.00
5	15	-1.00	0.00	-1.00
6	16	1.00	0.00	-1.00
7	2	-1.00	0.00	1.00
8	7	1.00	0.00	1.00
9	1	0.00	-1.00	-1.00
10	3	0.00	1.00	-1.00
11	10	0.00	-1.00	1.00
12	8	0.00	1.00	1.00
13	9	0.00	0.00	0.00
14	5	0.00	0.00	0.00
15	11	0.00	0.00	0.00
16	12	0.00	0.00	0.00
17	4	0.00	0.00	0.00

135 **Coded value (CV):**  $\frac{x - \text{mid value (centre point)}}{\text{Difference (internal gap)}}$  Eqn. 1

136 **Eqn. 1 showed about the method of calculating coded value**

137 Besides response surface methodology, comparative performance evaluation and relative  
 138 advantages of pant loading ramp was also assessed by using a developed interview schedule

139 that includes the questions regarding the concept of drudgery reduction, adjustability, anti-  
140 slippery, strength and easy handling of loading ramp. Responses were recorded in Yes or No  
141 form.

142

## 143 **RESULTS AND DISCUSSION**

### 144 **General characteristics of selected rice mill workers**

145 The general characteristics of selected workers for the RSM experiments revealed that  
146 the mean±SD of age, height, body weight, body mass index of workers were calculated as  
147 29.03±4.23 years, 162±12.67 cm., 53.65±9.28 kg, and 20.84 ±3.41. The mean±SD of aerobic  
148 capacity based on heart rate, BP, pulse rate and body temperature was 39.45 ±5.67 L/min.,  
149 117.53/72.15±12/8.4 (systolic/diastolic), 76.54±7.56 beats/min. and 96.50 ±2.6<sup>0</sup>F. Calculated  
150 MSD rate was 85.45% by using Nordic questionnaire (Kuroinka *et al.*, 1987<sup>10</sup>).

### 151 **Design and development of pant loading ramp**

152 After need assessment, pant loading ramp was ergonomically designed and developed  
153 to reduce the drudgery of rice mill workers which was made of wood and aluminium sheet  
154 (small hole were mounted on aluminium sheet). It was 19 feet in length, having width of 1.5  
155 feet, anti-slippery, easy to move due to provision of rotating wheels, adjustable at varying  
156 heights of the loading vehicle (between 2.5-5 feet) and reduces the loading time up to 30  
157 minutes. Finally it was found that the designing of loading ramp reduces the preparation time  
158 and delivers maximum output with minimum time (Plate 1). In terms of tool designing,  
159 Koivunen (1994<sup>11</sup>) reported that the redesign of the tool must base on the problem analysis  
160 and user-centered design (Kardborn, 1998<sup>12</sup>; Pheasant, 1996<sup>13</sup>) that also provide a good basis  
161 for judgement (Sperling *et al.*, 1993<sup>14</sup>; Kumar, 1994<sup>15</sup>).

### 162 **Optimization of process parameters using response surface methodology (RSM)**

163 In this study the RSM was applied to optimize the operating parameters (load  
164 weight, height of ramp and time) considered during the experiment. ANOVA test was  
165 applied to evaluate the adequacy (by applying the lack-of-fit test) of different models and to  
166 evaluate the statistical significance of the factors in the model. In order to examine the  
167 goodness and evaluate the adequacy of a fitted model, the coefficient of determination ( $R^2$ )  
168 was calculated. Thereafter surfer software 9.0 was used for the graphical optimization of  
169 interaction of selected dependent and independent variables (Pishgar *et al.*, 2012<sup>16</sup>).



174 **Front View**

**Internal view**

**Top view**

**Side view**

175 **Plate 1: Different views of improved loading ramp**

### 176 **Development of second order model**

177 A complete second mathematical model (Eqn 1) was fitted to the data and adequacy  
178 of the model was tested considering the coefficient of multiple determinations ( $R^2$ ), Fisher's  
179 F-test and lack of fit. The model was used to interpret the effect of load weight, ramp height  
180 and time of load carrying on back on various responses (Table 6) energy expenditure (EE),  
181 rate of perceived exertion (RPE), total cardiac cost of work (TCCW) and grip strength (GS).

182 Experimental data were analyzed by employing multiple regression technique to  
183 develop response functions and variable parameters were optimized for the best outputs. The  
184 regression coefficient of the complete second order model and their significance has been  
185 reported (Table 7). High P value indicated that a model had a significant lack of fit and



186 therefore considered to be inadequate. The lower the value of P, better would be model thus  
 187 model having P value lower than 0.01 were accepted.

188 The relative effect of each process parameters on individual response was compared to the p-  
 189 value less than 0.01 indicates model term are significant. The F-value tests were performed  
 190 by using analysis of variance (ANOVA) to calculate the significance of each type of model.  
 191 Based on the results of F-value the highest order model with significant terms which shows  
 192 the relationship between parameters well and normally, would be chosen.

193 **Table 6: Experiment data for various responses from RSM technique**

Std	Run	Factor X <sub>1</sub>	Factor X <sub>2</sub>	Factor X <sub>3</sub>	Response 1	Response 2	Response 3	Response 4
		Load weight (kilogram)	Height (feet)	Time (minute)	EE (kJ/min.)	RPE (percent)	TCCW (beats)	Grip strength (percent)
1	17	-1	-1	0	10.86	30	676.65	3.22
2	14	1	-1	0	11.35	50	700	7.16
3	6	-1	1	0	10.99	30	536	5.34
4	13	1	1	0	11.65	50	594.04	6
5	15	-1	0	-1	11.63	20	553	5
6	16	1	0	-1	12	45	586.61	5.14
7	2	-1	0	1	11.47	30	796	4
8	7	1	0	1	12.2	40	920.5	6.21
9	1	0	-1	-1	11.81	30	532.84	4.3
10	3	0	1	-1	11.49	45	622.48	6.12
11	10	0	-1	1	11.36	40	746	4.24
12	8	0	1	1	12.96	45	1034.5	7.12
13	9	0	0	0	10.91	40	689.5	5.83
14	5	0	0	0	10.99	45	696	6.45
15	11	0	0	0	11.47	40	715	6
16	12	0	0	0	11.5	45	709	5.57
17	4	0	0	0	10.91	45	689.5	5.6

194

195 **Table 7: Result of regression analysis for responses from RSM technique**

Source	Energy expenditure (kJ/min.)		Rate of perceived exertion (percent)		Total cardiac cost of work (beats)		Grip strength (percent)	
	Coefficient	P value	Coefficient	P value	Coefficient	P value	Coefficient	P value
<b>Model</b>	11.156	0.0172	43	0.0035	699.8	0.0552	5.89	0.0387
<b>X<sub>1</sub></b>	0.28125	0.0276	9.375	0.0001	29.9375	0.3514	0.86875	0.0071
<b>X<sub>2</sub></b>	0.21375	0.0731	2.5	0.0838	16.44125	0.6005	0.7075	0.0183
<b>X<sub>3</sub></b>	0.1325	0.2328	1.875	0.1746	150.25875	0.0015	0.12625	0.6019
<b>X<sub>1</sub>, X<sub>2</sub></b>	0.0425	0.7756	0	1.0000	8.6725	0.8438	-0.82	0.0405
<b>X<sub>1</sub>, X<sub>3</sub></b>	0.09	0.5503	-3.75	0.0700	22.7225	0.6087	0.5175	0.1574
<b>X<sub>2</sub>, X<sub>3</sub></b>	0.48	0.0123	-2.5	0.1973	49.715	0.2794	0.265	0.4442
<b>X<sub>1,2</sub></b>	-0.01175	0.9354	-4.625	0.0305	-46.5275	0.2974	-0.40875	0.2403
<b>X<sub>2,2</sub></b>	0.06825	0.6404	1.625	0.3738	-26.6	0.5404	-0.05125	0.8767
<b>X<sub>3,2</sub></b>	0.68075	0.0018	-4.625	0.0305	60.755	0.1851	-0.39375	0.2564
<b>R<sup>2</sup></b>	0.8768		0.9246		0.8194		0.8398	
<b>F Value</b>	<b>5.54</b>		9.54		<b>3.53</b>		4.08	
<b>Lack of</b>	<b>NS</b>		<b>NS</b>		<b>S</b>		<b>NS</b>	

fit								
-----	--	--	--	--	--	--	--	--

196 **Effect of independent variables on different responses**

197 When a regression model is fitted using two or more continuous predictors, it's useful to  
 198 present a graphical visualization of the fitted surface (Lenth, 2012<sup>17</sup>) in the form of contour  
 199 plot. In a contour plot, two factors at a time can be visualized; the others have to be set to  
 200 normally at their central values. Thus by response surface methodology, a complete  
 201 realization of the process parameters and their effects were quantified by developing the  
 202 contour plot under following heads:

203 **Effect of load weight, height and time on energy expenditure (EE)**

204 Significance of independent variable i.e. load weight, height and time on EE data was tested  
 205 using ANOVA (Table 8) and total effect on EE was observed (Table 9). Contour plot Fig. 1  
 206 A1 depicting the effect of load weight and height on EE, it was observed that EE was found  
 207 to be increased in linear pattern with the both i.e. ramp height and load weight. Fig. 1 A2  
 208 shows the effect of load weight and time on EE, it was observed that only time, affects the EE  
 209 parameters. Whereas Fig. 1 A3 shows the effect of ramp height and time on EE, it was  
 210 observed that only time affects the EE of human.

211 **Table 8: ANOVA for energy expenditure (EE) during experiment**

Source	Df	Sum of square	Mean of square	F Value
Model	9	4.10	0.46	5.54**
Linear	3	1.14	0.38	4.63***
Quadratic	3	0.95	0.31	3.89*
Interactive	3	1.97	0.65	8.01**
Error	7	0.58	0.082	
Total	16	4.64		

212 \*\*\*, \*\*, \* significant at 1, 5 and 10 % level of significance respectively; F tab value (9,7) = 6.71; F tab value  
 213 (3,7) = 8.45 (1%); (3,7) = 4.34 (5%); F tab value (9, 7)=2.72; F tab value (3,7) = 3.07 (10%)  
 214

215 **Table 9: Total effect of individual parameter on energy expenditure (EE) experiment**

Source	Df	Sum of square	Mean of square	F Value
<b>Model</b>	9	4.10	0.46	5.54**
Load weight ( $x_1$ )	4	0.66	0.16	2.04
Height ( $x_2$ )	4	1.31	0.32	4.01*
Time ( $x_3$ )	4	3.04	0.76	9.27***

Error	7	0.58	0.082	
Total	19	5.59		

216 \*\*\*, \*\*, \* significant at 1, 5 and 10 % level of significance respectively; F tab value (9,7) = 6.71; F tab value  
 217 (4,7) = 7.84 (1%); F tab value (9, 7) = 3.67 ; F tab value (4,7) = 4.12 (5%); F tab value (9, 7) =2.72; F tab value  
 218 (4,7) = 2.96 (10%)  
 219

220 **Effect of load weight, height and time on rate of perceived exertion (RPE)**

221 Significance of independent variable i.e. load weight, height and time on RPE data was tested  
 222 using ANOVA (Table 10) and total effect on EE was observed (Table 11). Contour plot Fig.  
 223 2 A1 depicted the effect of load weight and height on RPE, it was observed that RPE was  
 224 found to be increased in linear pattern with the both i.e. ramp height and load weight. From  
 225 Fig. 2 A2, which shows the effect of load weight and time on RPE, it was observed that only  
 226 load weight affects the RPE parameters. Whereas Fig. 2 A3 shows the effect of ramp height  
 227 and time on RPE, it was shows that a minimum region at center which is called as saddle  
 228 point and shows that there is no effect of height and time on RPE.

229 **Table 10: ANOVA for rate of perceived exertion (RPE) during experiment**

Source	Df	Sum of square	Mean of square	F Value
Model	9	1057.86	117.54	9.53***
Linear	3	781.24	260.41	21.14***
Quadratic	3	81.25	27.08	2.19
Interactive	3	191.23	63.74	5.17**
Error	7	86.25	12.32	
Total	16	1139.97		

230 \*\*\*, \*\*, \* significant at 1, 5 and 10 % level of significance respectively; F tab value (9,7) = 6.71; F tab value  
 231 (3,7) = 8.45 (1%); F tab value (9, 7) = 3.67; F tab value (3,7) = 4.34 (5%)  
 232 F tab value (9, 7) =2.72; F tab value (3,7) = 3.07 (10%)

233 **Table 11: Total effect of individual parameter on perceived exertion (RPE) experiment**


Source	df	Sum of square	Mean of square	F Value
<b>Model</b>	9	1057.86	117.54	9.53***
Load weight ( $x_1$ )	4	849.43	212.35	17.24***
Height ( $x_2$ )	4	86.11	21.52	1.75
Time ( $x_3$ )	4	199.43	49.85	4.05*
Error	7	86.25	12.32	
Total	19	1221.22		

234 \*\*\*, \*\*, \* significant at 1, 5 and 10 % level of significance respectively tab value (9,7) = 6.71; F tab value (4,7)  
 235 = 7.84 (1%); F tab value (9, 7) = 3.67; F tab value (4, 7) = 4.12 (5%); F tab value (9, 7) =2.72; F tab value (4, 7)  
 236 = 2.96 (10%)


237 **Effect of load weight, height and time on total cardiac cost of work (TCCW)**

238 Significance of independent variable i.e. load weight, height and time on **TCCW** data was  
239 tested using ANOVA (Table 12) and total effect on EE was observed (Table 13). Fig. 3 A1 of  
240 contour plot depicting the effect of load weight and height on TCCW, it was observed that  
241 TCCW was minimum affected by the height of the ramp and only load weight affects the  
242 individuals TCCW. Fig. 3 A2 shows the effect of load weight and time on TCCW, it was  
243 observed that only time affects the TCCW parameters. Whereas Fig 3 A3 shows a minimum  
244 region at centre which is called as saddle point and showed that there is no effect of height  
245 and time on TCCW.


246

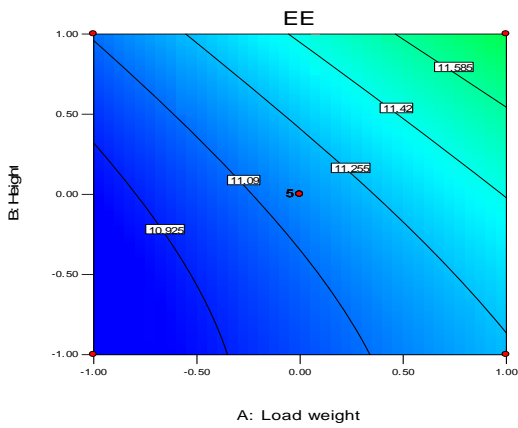


A1: Effect of loadweight and height on EE

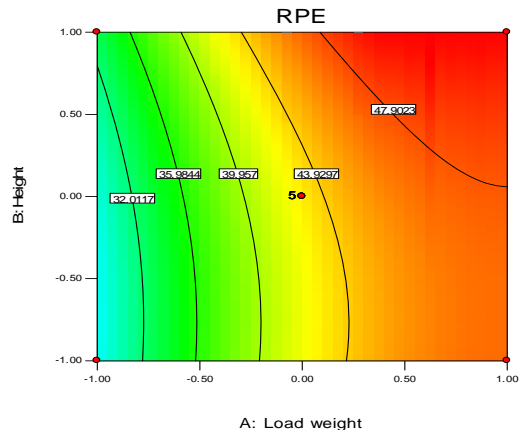


A1: Effect of loadweight and height on RPE

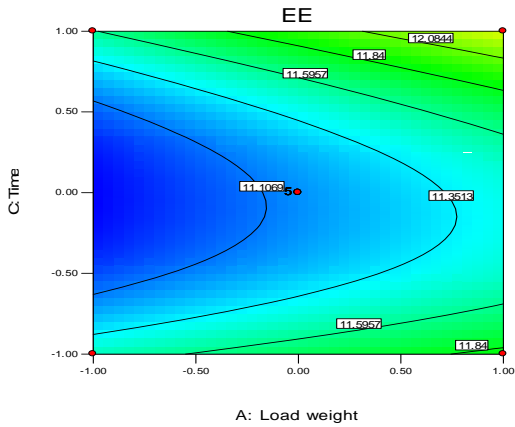


A2: Effect of load weight and time on EE

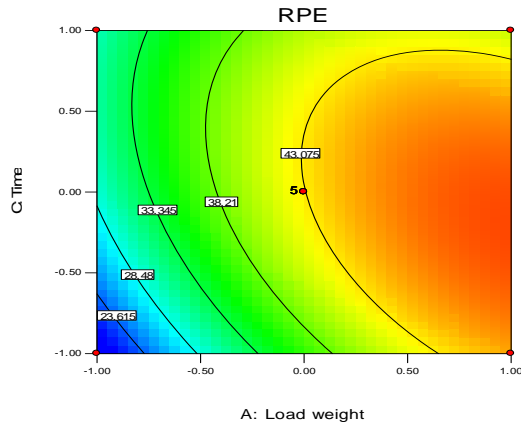

A2: Effect of load weight and time on RPE

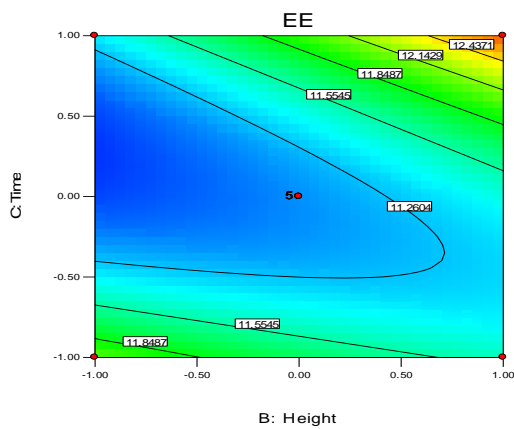


A3: Effect of height and time on EE

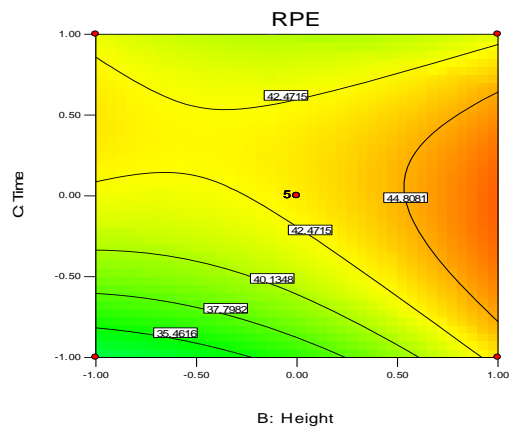


A3: Effect of height and time on RPE

Fig. 1: Contour plots for Energy Expenditure (EE) during experiment


Fig. 2: Contour plots for Rate of Perceived Exertion (RPE) during experiment

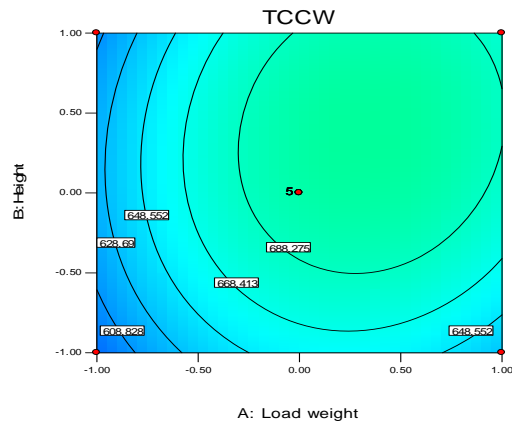


**A1: Effect of load weight and height on TCCW**

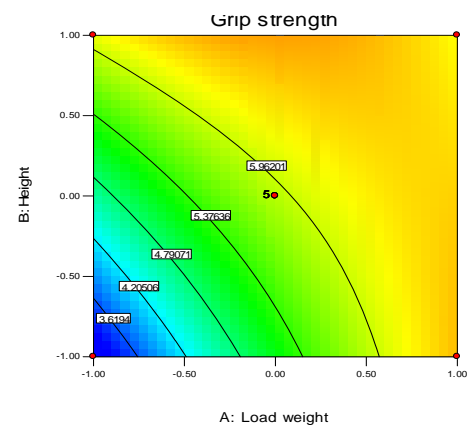


**A1: Effect of load weight and height on GS**

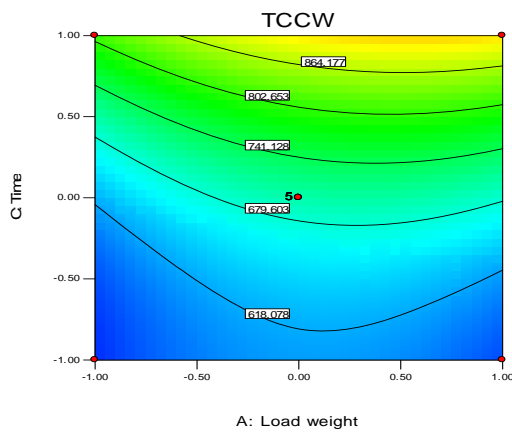


**A2: Effect of load weight and time on TCCW**

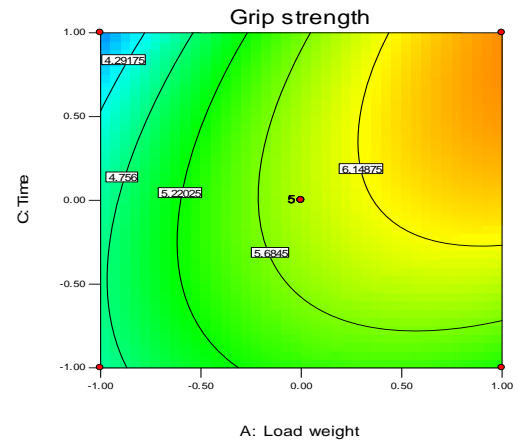

**A2: Effect of load weight and time on GS**

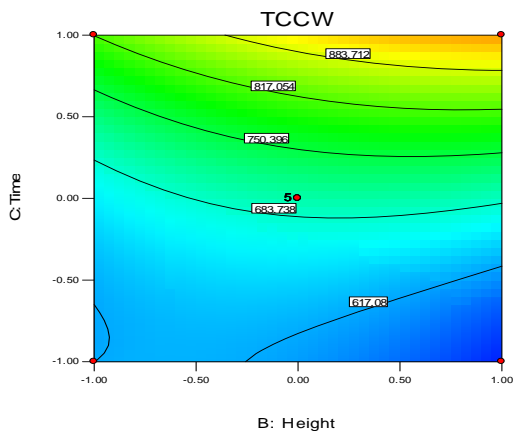

**A3: Effect of height and time on TCCW**

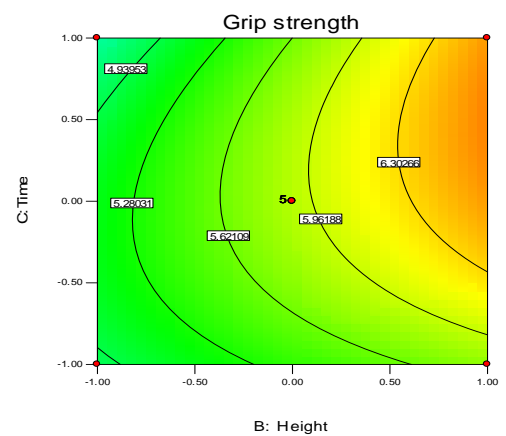

**A3: Effect of height and time on GS**

**Fig. 3: Contour plots for total cardiac cost of work (TCCW) during experiment**

**Fig. 4: Contour plots for grip strength (GS) during experiment**

249 **Table 12: ANOVA for total cardiac cost of work (TCCW) during experiment**

Source	df	Sum of square	Mean of square	F Value
Model	9	228496.67	15388.51	3.52
Linear	3	189954.07	63318.02	8.80***
Quadratic	3	12252.4	4084.13	0.57
Interactive	3	27635.74	9211.91	1.28
Error	7	50358.60	7194.08	
Total	16	280200.8		

250 \*\*\*, \*\*, \* significant at 1, 5 and 10 % level of significance respectively; F tab value (9, 7) = 6.71; F tab value  
 251 (3, 7) = 8.45 (1%); F tab value (9, 7) = 3.67; F tab value (3, 7) = 4.34 (5%); F tab value (9, 7) = 2.72; F tab value  
 252 (3, 7) = 3.07 (10%)  
 253

254 **Table 13: Total effect of individual parameter on total cardiac cost of work (TCCW)**  
 255 **experiment**

Source	df	Sum of square	Mean of square	F Value
<b>Model</b>	9	228496.67	15388.51	3.52
Load weight ( $x_1$ )	4	1865	4662.77	0.65
Height ( $x_2$ )	4	15328.87	3832.21	0.53
Time ( $x_3$ )	4	208114.8	52028.71	7.23**
Error	7	50358.60	7194.08	
Total	19	275667.3		

256 \*\*\*, \*\*, \* significant at 1, 5 and 10 % level of significance respectively; F tab value (9,7) = 6.71; F tab value  
 257 (4,7) = 7.84 (1%); F tab value (9, 7) = 3.67; F tab value (4,7) = 4.12 (5%); F tab value (9, 7) = 2.72; F tab value  
 258 (4,7) = 2.96 (10%)  
 259

260 **Effect of load weight, height and time on grip strength (GS)**

261 Significance of independent variable i.e. loads weight, height and time on grip strength data  
 262 was tested using ANOVA (Table 14) and total effect of individual parameters was also  
 263 observed (Table 15). Contour plot Fig. 4 A1 depicting the effect of load weight and height on  
 264 grip strength at centre point and it shows that grip strength was increased with load weight  
 265 rather than height. Whereas Fig 4 A2, also showed the effect of load weight and time on grip  
 266 strength at centre point and it shows that grip strength was increased with load weight rather  
 267 than time. Fig 4 A3 shows the effect of time and ramp height on grip strength, it was  
 268 observed that only height affects the grip strength rather than time.

269 **Table 14: ANOVA for grip strength (GS) during experiment**

Source	df	Sum of square	Mean of square	F Value
Model	9	15.68	1.74	4.07**

Linear	3	10.15	3.38	8.05**
Quadratic	3	4.03	1.34	3.20*
Interactive	3	1.36	0.45	1.08
Error	7	2.99	0.42	
Total	16	18.53		

270 \*\*\*, \*\*, \* significant at 1, 5 and 10 % level of significance respectively; F tab value (9,7) = 6.71; F tab value  
 271 (3,7) = 8.45 (1%); F tab value (9, 7) = 3.67; F tab value (3, 7) = 4.34 (5%); F tab value (9, 7) =2.72; F tab value  
 272 (3, 7) = 3.07 (10%)  
 273

274 **Table 15: Total effect of individual parameter on grip strength experiment**

Source	df	Sum of square	Mean of square	F Value
<b>Model</b>	9	15.68	1.74	4.07**
Load weight ( $x_1$ )	4	10.48	2.62	6.23**
Height ( $x_2$ )	4	7.61	1.90	4.52**
Time ( $x_3$ )	4	2.12	0.53	1.26
Error	7	2.99	0.42	
Total	19	23.2		

275 \*\*\*, \*\*, \* significant at 1, 5 and 10 % level of significance respectively; F tab value (9,7) = 6.71; F tab value  
 276 (4,7) = 7.84 (1%); F tab value (9, 7) = 3.67; F tab value (4,7) = 4.12 (5%); F tab value (9, 7) =2.72; F tab value  
 277 (4,7) = 2.96 (10%)  
 278

279 **Optimization of parameters (load weight, height and time) for described responses**

280 Numerical optimization was carried out using design software. The goal was fixed to  
 281 minimize heart rate, energy expenditure and musculoskeletal disorder. The responses i.e.  
 282 energy expenditure (EE), rate of perceived exertion (RPE), total cardiac cost of work  
 283 (TCCW) and grip strength (GS) were taken into consideration for optimization. The goal  
 284 seeking begins at a random starting point and proceeds up and down the steepest slope on  
 285 the response surface for a maximum and minimum value of the response respectively.  
 286 Importance to the responses and independent variables were given on the basis of the  
 287 objective of the study. Maximum importance was (+++++) was given to time and EE,  
 288 next importance were given to the TCCW (+++++) RPE and GS, while the goal of load  
 289 weight and height (++++) was kept at in range similar study was also reported by Rai *et al.*  
 290 (2012)<sup>18</sup>. The goal setup and optimum value of different parameters obtained is given in  
 291 Table 16.

292

293



294 **Table 16: Constraints for optimization of parameters**

Name	Goal	Lower Limit	Upper limit	Goal setting
Load weight	in range	-1	1	+++
Ramp height	in range	-1	1	+++
Time	minimum	-1	1	+++++
Energy expenditure (EE)	minimum	-1	1	+++++
Rate of perceived exertion (RPE)	minimum	-1	1	++++
Total cardiac cost of work (TCCW)	minimum	-1	1	++++
Grip strength (GS)	minimum	-1	1	++++

295 **Table 17: Optimum values of parameters for experimentation of loading ramp**

Value	Load weight (kg.)	Height (feet)	Time (minutes)	EE (kJ/min.)	RPE (%)	TCCW (beats)	Grip strength (%)	Desirability
<b>Coded</b>	-1	-1	-0.71					
<b>Actual</b>	40	3	3.29	11.41	20.00	564.36	3.30	0.84

296 During optimization 17 solution were obtained, out of which the most suitable criteria, was  
 297 selected. The selected solution was tested for the actual conditions and it was observed out of  
 298 three independent variable optimum results were obtained when the load weight 40 kg.,  
 299 height 3 feet and time 3.29 minute (Table 17) which shows the reduction of energy  
 300 expenditure from 14.55 kJ/min. to 11.41 kJ/min., RPE from 85.45 to 20 %, TCCW from  
 301 996.3 to 564.36 beats and GS from 47.45 to 3.30 % with overall desirability of 0.84 %.  
 302 Hence, this combination shows the maximum efficiency with minimum time, energy,  
 303 TCCW and grip strength by working with loading ramp. Similarly Pandey and Vinay  
 304 (2016<sup>19</sup>) in a study of RSM on use of pant loading ramp reported that it was able to reduce  
 305 heart rate of selected respondent's from 135.4 beats/min. to 126.76 beats/min., MSD from  
 306 85.45 to 22.80 % and VO2 max from 39.45 to 34L/min. Similarly Aruna and Dhanalaksmi  
 307 (2012<sup>20</sup>) optimized the surface roughness when turning Inconel 718 with cermet inserts by  
 308 using response Surface Method (RSM). Optimized machining parameters are validated  
 309 experimentally, and it is observed that the response values are in reasonable agreement with  
 310 the predicted values. Kumar *et al.* (2013<sup>21</sup>) used RSM to determine the optimum machining  
 311 parameters leading to minimum surface roughness and maximum metal removal rate in  
 312 Surface grinding process.

313 **Comparative performance of the pant loading ramp and existing wooden plank.**


314 Use of developed loading ramp was able to reduce average energy expenditure of selected  
 315 respondents from 14.55±3.12 to 11.41±1.10 kJ/min., peak energy expenditure from  
 316 16±1.36 to 12±0.32 kJ/min., rate of perceived exertion from 85.45±8.43 to 20±2.1 %, grip  
 317 strength from 47.45±2.14 to 3.30±0.27 % and TCCW from 996.3±5.45 to  
 318 564.36±3.41beats. It means the energetic workload and perceived discomfort of the  
 319 respondents in different body regions differ significantly for the use of both traditional  
 320 and developed loading ramp.

321 **Table 18: Comparative evaluation of pant loading ramp and existing wooden plank**

S. No.	Physiological parameters	Wooden plank (Mean±SD)	Pant Loading ramp (Mean±SD)
1	Average Energy Expenditure (AWHR) (kJ/min)	14.55±3.12	11.41±1.10
2	Peak Energy Expenditure (PEE) (kJ/min.)	16±1.36	12±0.32
3	Rate of Perceived Exertion (RPE) (%)	85.45±8.43	20±2.1
4	Grip Strength (GS) (%)	47.45±2.14	3.30±0.27
5	Total cardiac cost of work (TCCW) (Beats)	996.3±5.45	564.36±3.41

322 **Relative advantage regarding pant loading ramp**

323 Relative advantages of pant  
 324 loading ramp was evaluated on the  
 325 basis of five parameter and the figure  
 326 below depicted that 92.57 %  
 327 respondents were satisfied with the  
 328 drudgery reduction concept of ramp and  
 329 all the respondents were believed that  
 330 the improved loading ramp was  
 331 adjustable and anti-slippery. While, 85.6 % workers were satisfied that the strength of  
 332 loading ramp was good. Furthermore 96.45 % respondents revealed that ramp was very easy  
 333 to handle from one place to another because of light weight and provision of rotating wheel.

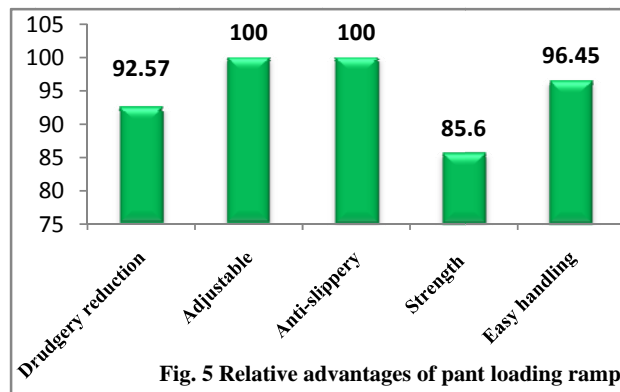

334 **CONCLUSION**

335 In conclusion it was observed that use of pant loading ramp was able to reduce  
 336 Energy Expenditure (EE) of respondents' from 14.55 kJ/min. to 11.41 kJ/min., Rate of

337 Perceived Exertion (RPE) from 85.45 to 20 %, Total Cardiac Cost of Work (TCCW) from  
338 996.3 to 564.36 beats and Grip Strength (GS) from 47.45 to 3.30 % with overall  
339 desirability of 0.84 %. Hence, this combination shows the maximum efficiency with  
340 minimum time, energy and psychophysical discomfort was obtained by loading ramp. In  
341 comparison with traditional method it was also found to reduce Average Working heart  
342 Rate (AWHR) (14.55-11.41), Peak Energy Expenditure (PEE) (16-12), Rate of Perceived  
343 Exertion (RPE) (85.45-20), Grip Strength (GS) (47.45-3.30) and Total Cardiac Cost of  
344 Work (TCCW) (996.3-564.35). Relative advantages showed that more than 95 % users were  
345 highly satisfied and found it advantageous.

#### 346 REFERENCES

- 347 1. Genaidy, A. M.; Christensen, D.M.; Nogiates, C. and Derairah, N. (2003). What is  
348 heavy? *Journal of Ergonomics*, 41 (4): 420-432.
- 349 2. Edlich, R.F., Hudson, M.A., Buschbacher, R.M., Winters, K.L., Britt, L.D., Cox,  
350 M.J., Becker, D.G., McLaughlin, J.K., Gubler, K.D. and Zomerschoe, T.S. et al.  
351 (2005). Devastating injuries in healthcare workers: Description of the crisis and  
352 legislative solution to the epidemic of back injury from patient lifting. *Journal of*  
353 *Long Term Effects of Medical Implants*, 15: 225-241.
- 354 3. Hoozemans, M.J., van der B, A.J., Frings, D.M.H., van Dijk, F.J. and van der Woude,  
355 L.H. (1998). Pushing and pulling in relation to musculoskeletal disorders: A review of  
356 risk factors. *Journal of Ergonomics*, 41: 757-781.
- 357 4. Health and Safety Authority. (2007). HSA summary of injury illness and fatality  
358 statistics 2005-2006.
- 359 5. Health and Safety Statistics (2012). Musculoskeletal disorders (MSDs) in Great  
360 Britain (GB).
- 361 6. Sampaio, F.C., Defaveri, D., Mantovani, H.C., Passos, F.M.L., Perego, P. and  
362 Converti, A. (2006). Use of response surface methodology for optimization of xylitol

- 363 production by the new yeast strain *debaryomyces hansenii* UFV-170. *Journal of Food*  
364 *Engineering*, 76: 376-86.
- 365 7. Alvarez, L.E. (2000). Approximation model building for design optimization using  
366 the RSM and genetic programming, Ph.D. thesis, department of civil and  
367 environmental engineering, university of brandford, UK. 2000.
- 368 8. Natarajan, U., Periyanan, P.R. and Yang, S.H. (2011). Multiple-response optimization  
369 for microend milling process using response surface methodology. *The international*  
370 *Journal of advanced Manufacturing Technology*, 56 (1-4) 177.
- 371 9. Borg, G. (1998). Borg's perceived exertion and pain scales. Human  
372 Kinetics:Champaign, IL.
- 373 10. Kuorinka, A. *et al.* (1987). Participation in workplace design with reference to low  
374 back pain: a case for the improvement of the police patrol car. *Ergonomics*, 37  
375 (7):1131-1136.
- 376 11. Koivunen, M.R. (1994). Actor Tools: tools for user interface modelling, developing  
377 and analysis. Acta Polytechnica Scandinavica, Mathematics and Computing in  
378 Engineering Design, 69, Helsinki.
- 379 12. Kardborn, A. (1998). Inter-organizational participation and user focus in a large-scale  
380 product development programme: The Swedish hand tool project. *International*  
381 *Journal of Industrial Ergonomisc*, 21: 369-381.
- 382 13. Pheasant, S.T. (1996). Body space: anthropometry, ergonomics and design of work,  
383 2<sup>nd</sup> edition, Taylor & Francis, London.
- 384 14. Sperling, L., Dahlman, S., Wikström, L., Kilbom, Å. and Kadefors, R. (1993). A cube  
385 model for the classification of work with hand tools and the formulation of functional  
386 requirements. *Journal of Applied Ergonomics*, 24 (3): 212-230.
- 387 15. Kumar, S. (1994). A conceptual model of overexertion, safety and risk of injury in  
388 occupational settings. *Human Factors*, 36: 197-209.

- 389 16. Pishgar S.H. Komleh, Keyhan I.A., Mostofi, M.R., Sarkariand, A. and Jafari (2012).  
390 Application of response surface methodology for optimization of picker-husker  
391 harvesting losses in corn seed. *Iranica Journal of Energy & Environment* 3 (2): 134-  
392 142.
- 393 17. Lenth, R.V. (2012). Surface plots in the RSM package.
- 394 18. Rai, A. (2012). Ergonomic evaluation of conventional and improved methods of aonal  
395 priking. Unpublished M.Sc. Thesis, Deptt. of Family Resource Management, CCS  
396 Haryana Agriculture University Hissar, India.
- 397 19. Pandey, K. and Vinay, D. (2016). Optimization of the process parameters in rice mill  
398 using response surface methodology (RSM). *Journal of Applied and Natural Science*  
399 8 (3): 1267–1277.
- 400 20. Aruna M. and Dhanalaksmi V. (2012). Design optimization of cutting parameters  
401 when turning inconel 718 with cermet inserts. *International Journal of Mechanical*  
402 *and Aerospace Engineering*, 6: 187-190.
- 403 21. Kumar, P., Kumar, A. and Singh, B. (2013). Optimization of Process Parameters in  
404 Surface Grinding Using Response Surface Methodology. *International Journal of*  
405 *Research in Mechanical Engineering & Technology*, 2 (2):245-252.