

1 Modal analysis and optimization of typical parts 2 of 2K-V reducer

3
4 **Abstract:**As a new type of high-precision gear transmission mechanism, the transmission accuracy
5 of the 2K-V reducer will be greatly affected by vibration. With the RV110E reducer as the
6 research object, a three-dimensional model of the needle wheel is established.Using the
7 finite element analysis software, the natural frequency and mode shape of the needle
8 wheel are calculated, when it's under the output condition, then compared with the
9 calculated gear meshing frequency.It is found whenthe needle wheel is used as output, the
10 vibration frequency is within the gear meshing frequency range, which is easy to cause
11 resonance, thereby affects the transmission precision of the whole machine. The part of
12 the outer shell of the needle wheel and the oil seal of the skeleton is the weakest and prone
13 to deformation. By adding 6 reinforcing ribs between the needle wheel flange and the
14 outer casing, increasing the flange outer diameter at the same time, the natural frequency
15 can be increased, the deformation concentrated region can be transferred to the outer
16 casing and the reinforcing rib. The connected parts avoid resonance and increase the
17 service life of the needle wheel.

18 **Keywords:** 2K-V reducer; The needle wheel;Modal analysis;The optimization design

19 1. Introduction


20 2K-V (called Rotary Vector, RV for short) is a new planetary transmission mechanism, which is
21 composed of 2K-H planetary transmission and K-H-V planetary transmission.It's a new type of
22 planetary gear transmission mechanism with small tooth difference. The structure adopts the
23 combination of involute gear planetary transmission and cycloidal pinion planetary transmission. It
24 has compact structure, small volume, light weight, high transmission accuracy, high efficiency and
25 large transmission ratio range^[1].Due to its excellent performance, 2K-V reducer has been used more
26 and more in industrial robots, CNC machine tools, printing machinery, semiconductor equipment,
27 radar and other precision machines.

28 At present, Japan's research on 2K-V reducer has reached the international leading level, the 2K-V
29 reducer produced by ourselves often has problems, such as insufficient transmission precision and
30 large vibration in the application,for this reason, a large number of researches conducted by
31 researchers in various universities and research institutions in China. It can be seen from the related
32 literature that there are few studies on the inherent characteristics of the needle wheel^[2]. As a very
33 important part of the 2K-V type reducer, the needle wheel case supports and protects the

34 components of the internals during the output of the planet carrier, such as the cycloidal wheel,
 35 planetary gear, crankshaft, input and output flange, and pin gear. Secondly, when fixing the planet
 36 carrier, the needle wheel can be used as an output tool to realize the normal operation of the reducer.
 37 Because the different working states have different constraints on the needle wheel, the inherent
 38 characteristics of the object are closely related to the constraints of the object, but in the case where
 39 the needle wheel is fixed, it will not resonate with the whole machine. Therefore, in this paper, with
 40 the RV110E reducer as the model, by establishing the finite element model of the needle wheel,
 41 only the modal of the needle wheel as the output condition is analyzed, in this case, the natural
 42 frequencies and modes of each order are obtained respectively. Analyzing its intrinsic
 43 characteristics, then give an optimization scheme to lay the foundation for subsequent kinematics
 44 and dynamics analysis.

45 2. 2K-V type reducer transmission principle

46 The schematic diagram of the transmission system of the 2K-V type reducer is shown in Fig.1. It is
 47 mainly composed of main components such as cycloidal gear, crankshaft, planetary gear, planet
 48 carrier, the needle wheel and sun gear. The transmission system uses a secondary speed reduction
 49 mechanism, wherein the first stage speed reduction mechanism is an involute cylindrical gear
 50 planetary speed reduction mechanism, and the second stage speed reduction mechanism is a
 51 cycloidal pin wheel planetary speed reduction mechanism^[3,4].

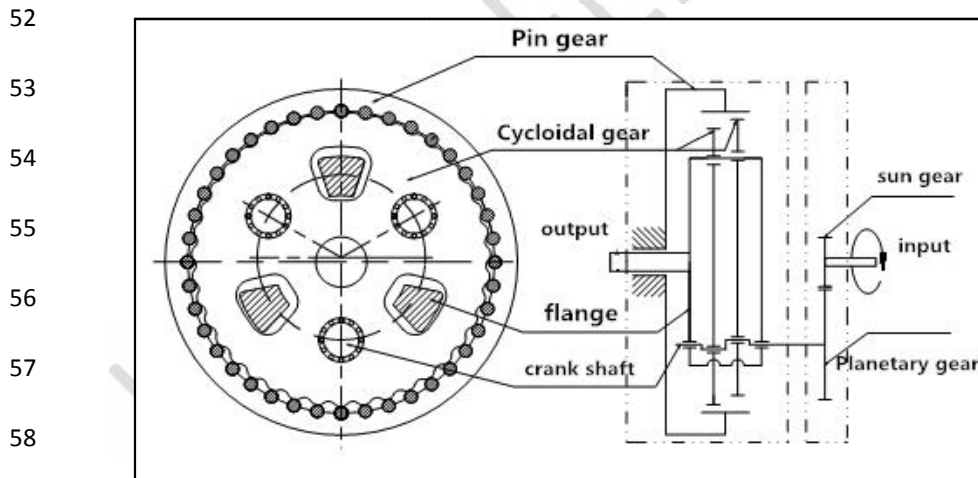

59 Fig.1 Schematic diagram of transmission system of 2K-V type reducer

60 When fixing the planet carrier and the needle wheel as an output, at this time, the transmission ratio
 61 of the system i_z is

62

$$i_z = -\frac{Z_p}{Z_s} \frac{Z_r}{Z_r - Z_b} \quad (1)$$

63 In the formula Z_s —the number of Sun gear tooth ;

64 Z_{pg} —the number of planetary gear tooth ;

65 Z_b —the number of cycloid gear tooth ;

66 Z_r —the number of Pin gear tooth , In general $Z_r = Z_b + 1$

67 In this output mode, the power is input from the input shaft and transmitted to the planetary gear via
68 the sun gear, thereby the crank shaft is rotated to complete the first-stage deceleration. In the
69 second-stage deceleration, the rotation of the planetary gear acts as the power input for the rotation
70 of the cycloidal wheel, the rolling bearing on the crankshaft drives the cycloidal wheel to perform
71 the eccentric revolution movement opposite to the power input and the eccentric revolution
72 movement of the cycloidal wheel can pass through the needle. The tooth completes the gearless gear
73 transmission to realize the output of the pin gear housing. At this time, the input and output rotation
74 directions are opposite, and this can also be obtained by equation (1).

75 2. Basic principle of modal analysis

76 Modal refers to the natural vibration characteristics of various mechanical structures. Each mode of
77 each object has its specific natural frequency, mode shape and damping ratio [5]. Modal analysis is to
78 decompose the complex vibration of a specific structure into individual vibrations. The modal
79 analysis can determine the vibration characteristics of the structural system, and provide a basis for
80 subsequent kinematics and dynamics analysis.

81 The modality is an intrinsic property of the object itself, it is only related to the shape, material
82 properties, and constraint characteristics of the structure. It is independent of other conditions, so
83 simplify the complex dynamic equation to the undamped case as given by equation (2).

84
$$[M]\{\ddot{u}\} + [K]\{u\} = 0 \quad (2)$$

85 In the formula $[M]$ —Structure mass matrix ;

86 $[K]$ —Structural stiffness matrix ;

87 $\{\ddot{u}\}$ —Nodal acceleration vector ;

88 $\{u\}$ —Nodal displacement vector.

89 When harmonic vibration occurs, the equation (2) can be converted another equation [6], just like the
90 equation (3).

$$[K] - \omega_i^2 [M] \{\varphi_i\} = 0$$

91

(3)

92 From formula (3), the vibration frequency and mode of the vibration structure of each order


93 φ_i can be obtained [7].

94 Through modal analysis, the vibration condition of the structure under specific constraints can be
95 understood, compare it with the simulation model established by the computer, then prove whether
96 the established model is correct, and determine that the subsequent mechanical analysis can be
97 continued.

98 3. Modal analysis of the needle wheel

99 3.1 Establishment of a three-dimensional model

100 Use SOLIDWORK 2016^[8] to create a 3D model of the needle wheel. To make it easier to follow up
101 and change the 3D model, use the "Equation" function in the "Tools" function to define the basic
102 parameters, array features, and stretch features of each sketch. When the model changes are needed,
103 the corresponding parameters can be changed directly in the equation, the control global variables
104 can be selected to achieve rapid change of the model and achieve more efficient work efficiency.
105 The automatically generated needle wheel simulation model is shown in Fig.2. The model stored as
106 the "x_t" format in order to import into the Workbench working space easily [9].

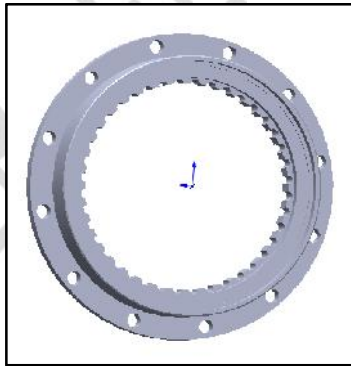

107

108

Fig. 2 Simulation model of the needle wheel

109 3.2 Add material properties

110 This paper uses the RV110E reducer as a model. The material defining the needle wheel is
111 QT450-10^[10]. QT450-10 is a ductile iron with good plasticity and toughness, good weldability and
112 machinability. It is often used in the manufacture of wheels for automobiles, clutch housing and
113 reducer housing. Its material properties are shown in Table 1.

114

115

116

117

118

Table 1 QT450-10 material properties

119

120

121

122

123 In the Workbench working environment, after importing the previously stored "x_t" needle wheel
124 file, define the material properties of the QT450-10 in the Engineering Data function, as shown in
125 Fig.3, and enter the modal analysis environment.

126

127

128

129

130

131

132

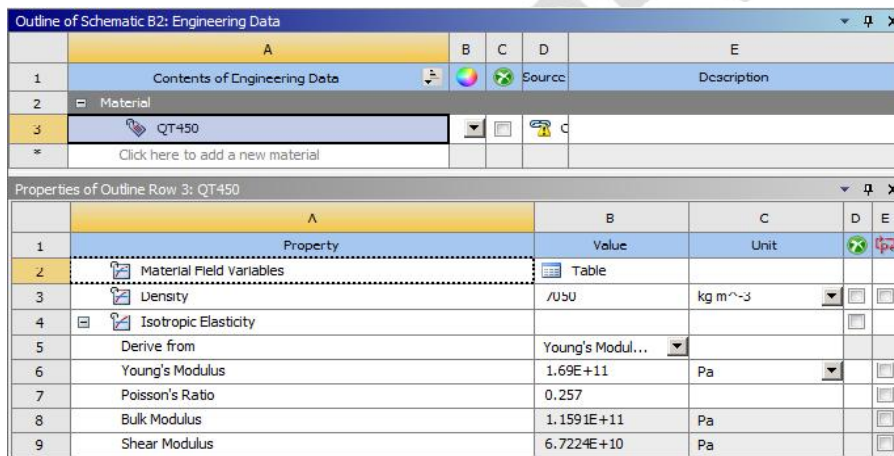


Fig. 3 Define the material properties of QT450-10

133

3.3 Meshing

134

135

136

137


In order to reflect the real situation of the model better, the chamfering and rounding of the model are not simplified in the processing of the model. The tetrahedral meshing is selected for grid division, and the chamfer and connection are in the form of grid encryption. After grid division, a total of 103339 nodes and 65896 elements are obtained, as shown in Fig.4 and Fig.5.

138

139

140

141

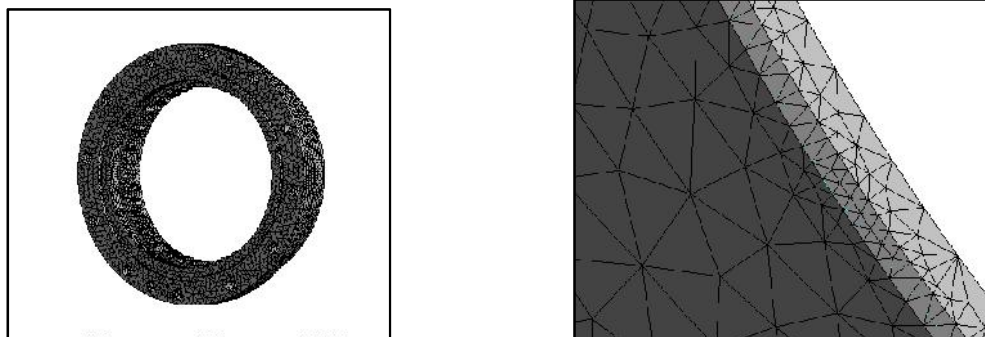

142

143

Fig. 4 Overall meshing

Fig. 5 Meshing at the chamfer

144

3.4 Constraint form

145

The difference of the constraint forms will lead to different modal analysis results [11]. The

146


constraint form of the needle wheel is divided into two types and only the constraint form of the

147

needle wheel output is considered in this paper. That is, the needle wheel is used as the output, not

148

only must it be fixed by the needle sheath, but also subject to bearing constraints, as shown in Fig.6.

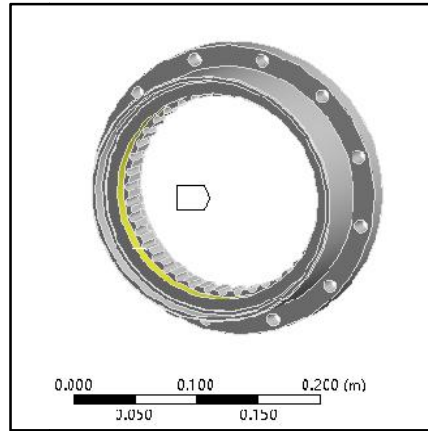

149

150

Fig. 6 Constraint form when the needle wheel is output

151

152

3.5 Modal analysis

153

After the modal analysis of ANSYS Workbench, the first 10 natural frequencies and modes of the

154

needle wheel are obtained. As shown in Table 2, each mechanical structure has different natural

155

frequencies under certain constraints, but generally only the minimum natural frequency is

156

concerned. Because at this natural frequency, the structure is most prone to resonance, and the mode

157

of the minimum vibration frequency is shown in Fig.7.

158


Table 2 Natural frequency and mode shape of the needle wheel output

Order number	frequency/Hz	Vibration mode
1	0	Rotate around the Z axis
2	1384.4	Telescopic along the XOY plane
3	1587.9	Telescopic along the XOY plane

159
160
161
162
163
164
165
166

4	1661.9	Bending around the Z axis
5	1669.3	Bending around the Z axis
6	1917.1	Telescopic along the XOY plane
7	1917.5	Telescopic along the XOY plane
8	4077.2	Distorted along the XOY face
9	4085.1	Distorted along the XOY face
10	4332.1	Distorted along the XOY face

167
168
169
170
171
172

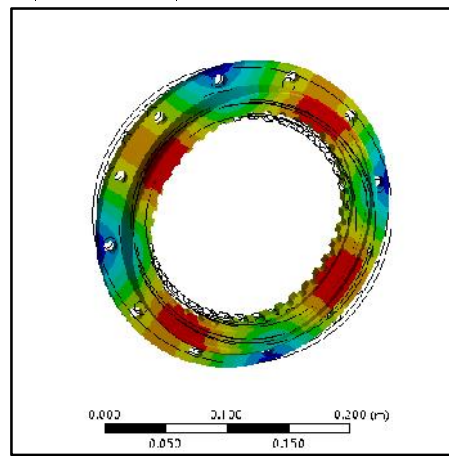

173

Fig. 7 Mode shape of the needle wheel output

174

4. Modal result analysis

175
176
177
178

When the needle wheel is used as the output, available from the Vibration mode, the deformation of the needle wheel is not only concentrated on the XOY surface expansion and deformation, the linear addition of the various modes is fitted to the actual situation of the needle wheel output. It can be seen that it is the overall expansion deformation rather than the region.

179
180
181

In the 2K-V type reducer, there are gears of the first-stage transmission and the second-stage transmission. There are meshing frequencies. The calculation formula of the first-stage meshing frequency and the second-stage meshing frequency is defined as the equation (4) and (5).

182

$$f_{m2} = Z_b \cdot Z_r \cdot f_{out} \quad (4)$$

183

$$f_{m2} = Z_b \cdot Z_r \cdot f_{out} \quad (5)$$

184 In the formula , f_{out} ——output speed (rad/s) ,

185 It can be calculated that the first stage meshing frequency and the second stage meshing frequency
186 are 1466.66 Hz and 1430 Hz respectively.

187 Comparing the minimum natural frequency of the needle wheel with 1384.4Hz and the natural
188 meshing frequency of the first stage transmission of 1466.66Hz, it can be seen that the natural
189 frequency of the needle wheel is within the range of gear meshing frequency, so it is easy to
190 generate resonance and affect the transmission precision of the whole transmission system. In order
191 to avoid this, it is necessary to optimize the needle wheel.

192 5. The needle wheel optimization

193 In order to avoid the lack of transmission accuracy, which is caused by the natural frequency of the
194 needle wheel and the resonance phenomenon of the whole machine, the optimization design of the
195 needle wheel should be considered. According to the basic principle of modal analysis, the modality
196 is the inherent property of the structure, only with the material of the machine component, the
197 constraint mode and the shape are related. For the 2K-V type reducer, the transmission form is
198 determined, so the constraint mode for the needle wheel is also fixed, so it is necessary to make
199 appropriate improvements to its structural form^[12].

200 It can be seen from the modal analysis structure that the maximum deformation of the needle wheel
201 occurs in the joint between the shell and the skeleton oil seal, so it should be considered to
202 strengthen this part of the structure.


203 Since the 2K-V type reducer has a very tight structure so there is no space for the inner cavity of the
204 needle wheel to change the structure. Therefore, it is possible to add 6 reinforcing ribs on the outer
205 side of the needle wheel, and increase the edge radius of the pin-toothed boss appropriately. The
206 new needle wheel model is shown in Fig.8. Adding the rib and increasing its thickness can improve
207 its stability. The calculation results are shown in Table 3. From the results, the natural frequency of
208 the needle wheel is increased from 1384.4 Hz to 1664.4 Hz, increased by 20%, the natural frequency
209 comparison before and after optimization is shown in Fig.9. It is far from the first-stage gear
210 meshing frequency, which can better avoid the resonance phenomenon caused by frequency
211 coincidence.

212

213

214

215

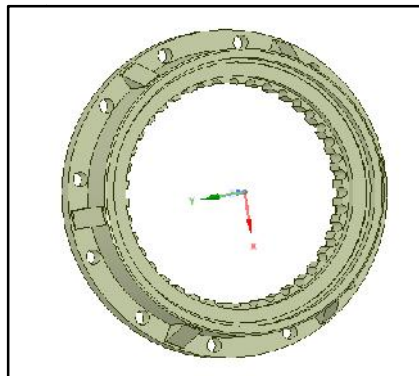

216

217


Fig. 93D model after modification

218

Table 3 Natural frequencies and modes of the pin gear shell output after changing the form

Order number	frequency/Hz	Vibration mode
1	0	Rotate around the Z axis
2	1664.4	Telescopic along the XOY plane
3	1668.3	Telescopic along the XOY plane
4	1903.1	Bending around the Z axis
5	1910.4	Bending around the Z axis
6	2950.4	Telescopic along the XOY plane
7	2950.8	Telescopic along the XOY plane
8	4258.3	Distorted along the XOY face
9	4412.3	Distorted along the XOY face
10	4709.9	Distorted along the XOY face

219

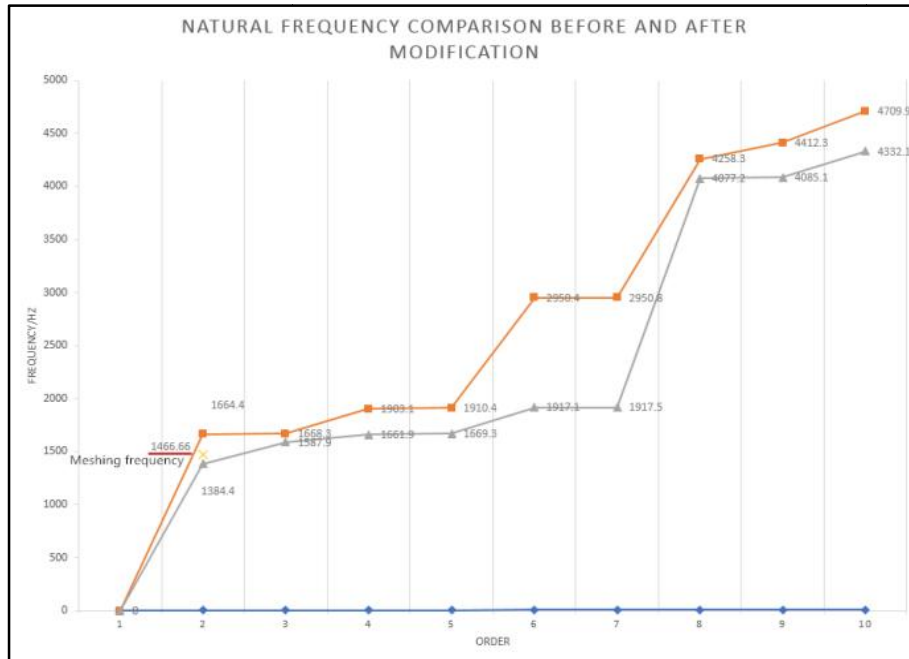

220

221

Fig. 9 Natural frequency comparison chart before and after optimization

222

223

224

225

226

The optimized vibration pattern is shown in Fig.10. It can be seen that after changing the shape and optimizing the needle wheel, not only the natural frequency is increased, but also the place, where the deformation is concentrated, is transferred from the skeleton oil seal link to the part of the outer shell of the needle wheel and the ribs. Improving the stability of the needle wheel and increasing the service life of the whole machine.

227


228

229

230

231

232

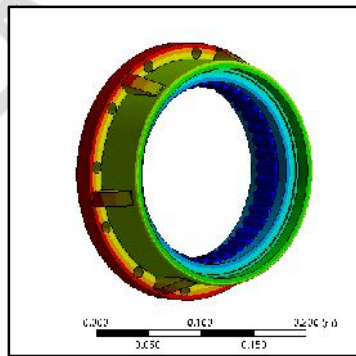

233

Fig. 10 Vibration mode of the needle wheel after modification

234

6. Conclusion

235

236

237

(1) Taking the RV110E reducer as a model, the natural frequency of the needle wheel is analyzed, and compared with the gear meshing frequency of the whole machine. It is easy to cause the resonance between the needle wheel and the whole machine under the output condition of the needle

238 wheel.

239 (2) Through the various modes of the needle wheel, it is found that the part of the outer shell is
240 weak, which is between the needle wheel and the skeleton oil seal, and it is easy to be deformed. The
241 optimization of this part should be considered.

242 (3) As can be seen from the vibration mode of the needle wheel optimized by changing the
243 structural form, the deformation concentration position is changed and transferred to the part where
244 the outer shell of the needle wheel is connected with the stiffener. This method can improve the
245 stability of the needle housing and increase the service life of the machine.

246 Reference

247 [1]He W, Shan L. Research and Analysis on Transmission Error of RV Reducer Used in Robot[M]//
248 Recent Advances in Mechanism Design for Robotics. 2015.

249 [2]Bao J, He W, Lu Q, et al. Research of Output-Pin-Wheel Cycloid Drive Reducer[C]// Wase
250 International Conference on Information Engineering. IEEE Computer Society. 2010.

251 [3]Li L, He W, Wang X, et al. The Study on High-accuracy RV Drive Used in Robot[J]. Journal of Dalian
252 Railway Institute, 1999.

253 [4]Shan L, He W. Study on Nonlinear Dynamics of RV Transmission System Used in Robot Joints[M]//
254 Recent Advances in Mechanism Design for Robotics. 2015.

255 [5]Huang J, Zhong J I, Duan H M, et al. Experimental modal analysis of mechanical structure and typical
256 applications[J]. China Measurement & Test, 2010.

257 [6]Asparouhov T, Hamaker E L, Muthén B. Dynamic Structural Equation Models[J]. Structural Equation
258 Modeling A Multidisciplinary Journal, 2017, 25(3):1-30.

259 [7]Wei-Dong H E, Jiang Z B, Bao J H, et al. Crank Shaft Modal Analysis Of RV Reducer[J]. Journal of
260 Dalian Jiaotong University, 2011.

261 [8].Bethune J D. Engineering Design and Graphics with SolidWorks 2016[J]. Pearson Schweiz Ag,
262 2017.

263 [9].Lawrence K L. ANSYS Workbench Tutorial[J]. 2010.

264 [10].Peng M, Yang X, Zhang H. Anti-rustiness and wear-resistance technology of Q235 steel and
265 QT450-10 ductile cast iron by plasma penetrating[J]. Heat Treatment of Metals, 2012, 37(5):106-110.

266 [11].Schmitz T L, Smith K S. Modal Analysis[J]. 2019.

267 [12].Wang J, Gu J, Yan Y. Study on the Relationship Between the Stiffness of RV Reducer and the Profile
268 Modification Method of Cycloid-pin Wheel[M]// Intelligent Robotics and Applications. 2016.

UNDER PEER REVIEW