

Evapotranspiration Based Micro Irrigation Scheduling of Tomato Crop under Naturally Ventilated Polyhouse

Abstract

The present study was undertaken to investigate the “Evapotranspiration Based Micro Irrigation Scheduling of Tomato Crop under Naturally Ventilated Polyhouse”, at experimental field of Department of Irrigation and Drainage Engineering, G. B. Pant University of Agriculture & Technology, Pantnagar, Uttarakhand during 2017-18. The average of mean monthly ET_0 estimated under polyhouse by FAO-PM (benchmark) model was 39.44 mm, but that of the FAO Penman, Hargreaves, Stanghellini, Priestley-Taylor and FAO Radiation models were 38.37, 18.18, 37.80, 48.17 and 53.87 mm, respectively. Whereas, the average of mean monthly ET_0 estimated under open environment by FAO-PM (benchmark) model was 116.34 mm, but that of the FAO Penman, Hargreaves, Stanghellini, Priestley-Taylor and FAO Radiation models were 119.33, 133, 126.41, 113.17 and 117.37 mm, respectively. The FAO Penman and Hargreaves model are found to be most and least appropriate models for estimating daily ET_0 under polyhouse. Whereas, FAO Radiation and Stanghellini model observed to be most and the least appropriate models in open environment for estimating daily ET_0 under polyhouse for the Pantnagar tarai condition of Uttarakhand. During the six month growing period, the average water requirement for tomato crop under polyhouse and open environments were 0.2149 and 0.2924 liter per day per plant, respectively, showing that the water requirement in the open environment was estimated as 30 % higher than that of polyhouse. The experimental results also revealed that the treatment T_2 (100 % water application of ET_c without mulch under polyhouse) recorded significant yield (18.97 kg/m²), water use efficiency (135.26 kg/m³) and maximum fruit weight (106.66 gm).

Comment [DAR1]: Is this unity of mass? If it is unity of mass, why "gm"?

1. INTRODUCTION

Efficient use of water is the prime objective of precision irrigation management. The widespread aim is to increase water productivity and reduce the adverse impact of the environment on irrigation (Parvizi et al., 2014). Evapotranspiration (ET) plays an important role in maintaining the water balance of the ecosystem. Accurate measurement of evapotranspiration is necessary for proper irrigation management, crop production, water resources management, environmental assessment, ecosystem modellers and solar energy system. Reference evapotranspiration (ET_0) has been usually applied to estimate the actual evapotranspiration, which is very difficult to assess by lysimeter, and water balance approach under the open field conditions at all places. ET_0 is useful to estimate the atmospheric water demand of the region and hence can be used for various applications including drought monitoring, irrigation scheduling, and understanding climate change impacts. Precise estimation of reference evapotranspiration (ET_0) and crop evapotranspiration (ET_c) on a daily basis is important to apply water through drip system for crops grown in the greenhouse (Singh et al., 2016, Tiwari et al., 2014).

Comment [DAR2]: Or ET_0 ?

Many models have been reported, to estimate reference evapotranspiration (ET_0) however, due to availability of the observed data, it is very difficult to choose the best one. Therefore, many comparative studies and evaluation of various, models have been conducted. Meanwhile, (Oudin et al., (2005) investigated optimal, method to calculate Potential evapotranspiration (PET) for use in rainfall-runoff model; (Tegos et al., (2015) summarized

46 | historical developments of ET_0 methods using standard meteorological data; and (McMahon *et*
47 | *al.*, (2016) considered the simplification of the Penman-Monteith model was having high
48 | efficiency in the estimating of ET_0 . The FAO Penman Monteith, method (FAO-PM) was
49 | considered as the standard ET_0 method based on both physiological and aerodynamic criteria
50 | under Food and Agriculture Organization (FAO) and World Meteorological Organization
51 | (WMO). As a standard method, FAO-PM can be used widely in many regions without any extra
52 | adjustments of parameters. The present study was undertaken to investigate the
53 | “Evapotranspiration Based Micro Irrigation Scheduling of Tomato Crop under Naturally
54 | Ventilated Polyhouse”, at experimental field of Department of Irrigation and Drainage
55 | Engineering, G. B. Pant University of Agriculture & Technology, Pantnagar, Uttarakhand during
56 | 2017-18.

57

58 | 2. MATERIALS AND METHODS

59 | 2.1 Description of Study Area

60 | The study area comes under the climatic zone of the western Himalayan region and is
61 | located in the Shivalik foothills of the Himalayas and represents the *Tarai* regions of
62 | Uttarakhand. The experiment was conducted in a single-span polyhouse E-W oriented, located at
63 | Irrigation and Drainage Engineering Department, College of Technology, G.B. Pant University
64 | of Agriculture & Technology, Pantnagar, Uttarakhand. The experimental site is located at
65 | 29.0210° N latitude, 79.4897° E longitude and at an altitude of 243.83m above mean sea level.
66 | The meteorological data such as temperature, relative humidity, wind speed, rainfall, pan
67 | evaporation and sunshine hours were acquired from the meteorological observatory located at
68 | Norman E. Borlaug Crop Research Centre (NECRC), Pantnagar, which is one km away from the
69 | experimental site and the microenvironmental parameters were obtained from polyhouse
70 | microenvironment monitoring system installed in the polyhouse. All the microenvironmental
71 | parameters recorded at 15 minutes time interval were downloaded from the data logger for the
72 | estimation of reference evapotranspiration.

73 | 2.2 Reference Evapotranspiration Calculation and Experimental Field Design

74 | The reference evapotranspiration (ET_0) models of Priestly Taylor, FAO Radiation,
75 | Hargreaves, FAO Penman and Hargreaves were compared with FAO Penman Monteith (FAO-
76 | PM) for both polyhouse and open environment. Tomato (*Lycopersicon esculentum* L.) variety
77 | Heemsohna was selected as a test crop for study. The experimental sites of area 100 m² and 60 m²
78 | respectively were provided polyhouse and open field crops. For planting the seedlings the field
79 | was ploughed manually followed by smooth planking. Vermicompost was added after the first
80 | ploughing so that it was thoroughly mixed in the soil during subsequent ploughing. Then the
81 | field was brought to a clean and fine tilth. The raised bed and layout of the experiment were
82 | prepared for the experiment as per plan. The area under polyhouse and open field were divided
83 | into 18 and 9 plots respectively of size 3m × 1m (Figure 2.1). The experiment was laid out in
84 | randomized block design having 6 treatments for polyhouse and 3 treatments for open were
85 | replicated thrice as represented in Table 2.1. A gap of 0.5 m between each plot and 0.5 m path was
86 | left in center of the polyhouse for mainline. The drip irrigation systems were installed with the
87 | mainline with pressure rating up to 4 kg/cm². The drip tapes of diameter 20 mm having emission
88 | points at 20 cm spacing with a flow rate of and 1.1 l/h were laid parallel between the two rows of

Comment [DAR3]: Please describe the climatic characteristics of the site as well as the climate classification according to Köppen-Geiger

Comment [DAR4]: Why 2.1 and not 1?


Comment [DAR5]: ?????

Formatted: Font color: Red

Comment [DAR6]: L h⁻¹
Please make all relations between units in the form of negative exponent.

89 crop. The rate of application of water at a different level was maintained by operating the valve at
90 the inlet of each lateral. The irrigation scheduling was done on the basis of crop evapotranspiration
91 estimation using Class A Pan Evaporimeter data, installed in polyhouse and open field,
92 respectively. Daily pan evaporation readings were recorded for the determination of crop
93 evapotranspiration.

UNDER PEER REVIEW

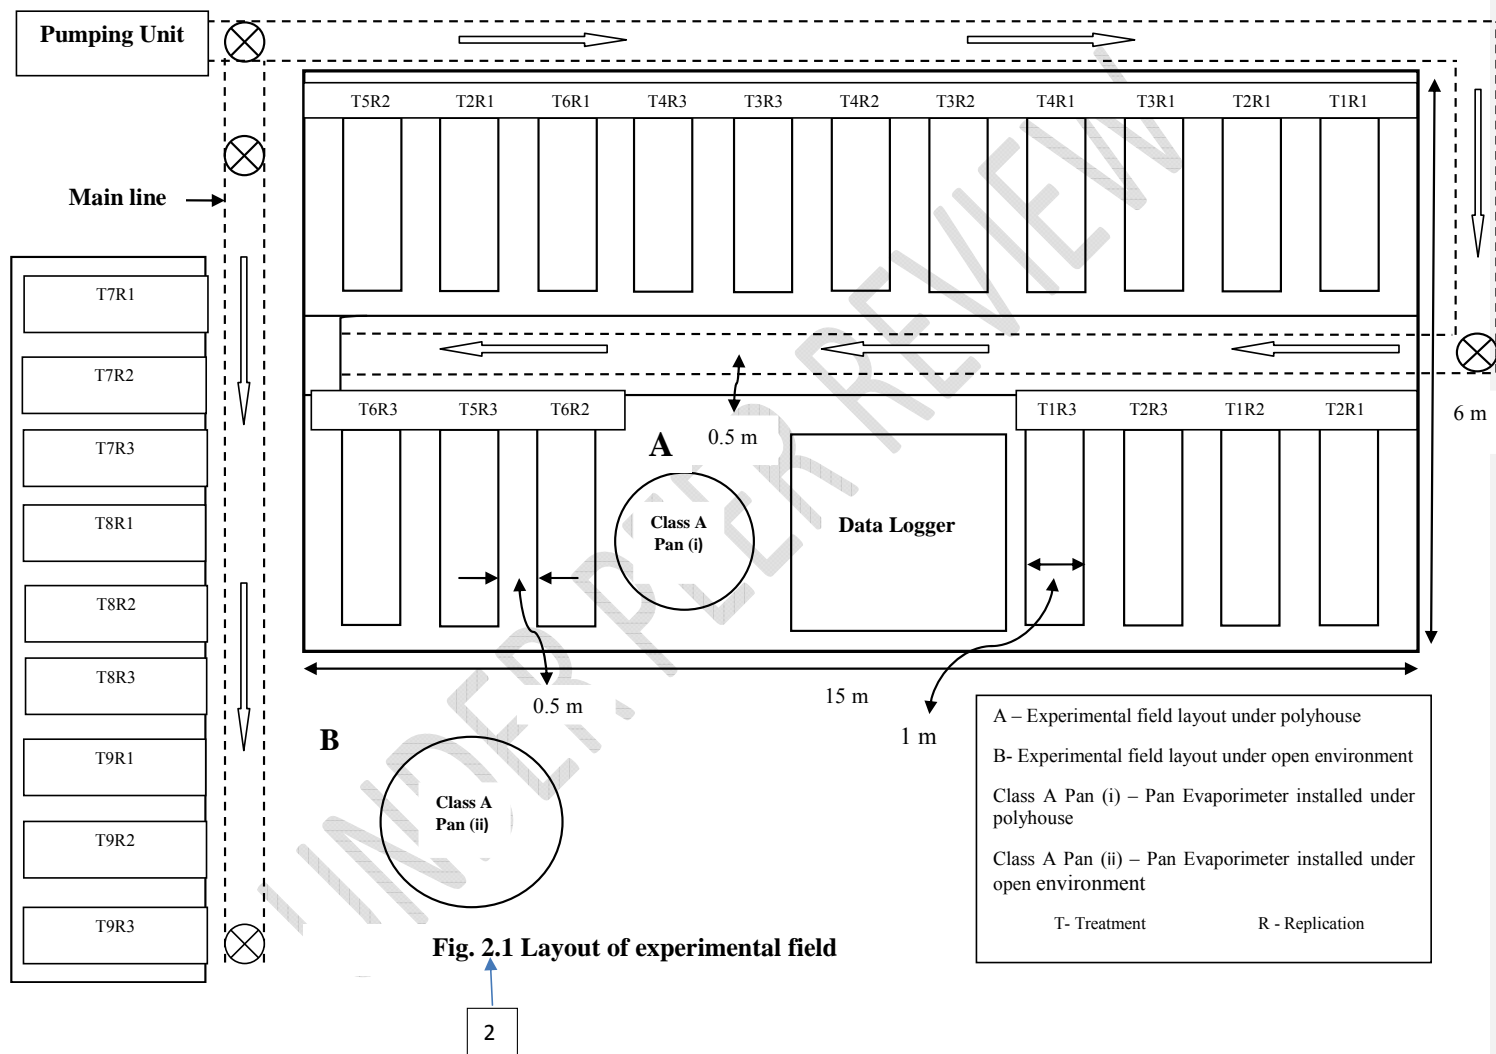

96 **Table 2.1 Details of treatments in Experiment**

Polyhouse Treatments			Open field Treatments		
Sr. No	Treatm ent	Details of Irrigation	Sr. No	Treat ment	Details of Irrigation
01	T ₁	100% of ET _c with plastic mulch	01	T ₇	100% of ET _c
02	T ₂	100% of ET _c without plastic mulch	02	T ₈	75% of ET _c
03	T ₃	75% of ET _c with plastic mulch	03	T ₉	75% of ET _c
04	T ₄	75% of ET _c without plastic mulch ⁹⁷			
05	T ₅	50% of ET _c with plastic mulch ⁹⁸			
06	T ₆	50% of ET _c without plastic mulch ⁹⁹			

100 ET_c= crop evapotranspiration

101 2.3 Drip Irrigation Scheduling of Tomato Crop

102 The volume of water applied using drip irrigation system was estimated with the
103 following relationship as given in INCID, (1994):

$$104 V = \sum (E_p \times K_C \times K_p \times S_p \times S_r \times WP - ER) \quad \dots (2.1)$$

105 V= Total amount of water applied (l/day/plant); E_p = Pan Evaporation (mm); K_c = Crop
106 coefficient, K_p= Pan coefficient; S_p= Plant to plant spacing (m); S_r= Row to row spacing (m);
107 WP = Percentage wetted area (90 %); and ER = Effective rainfall (mm).

108 The effective rainfall (ER) was calculated on monthly basis based on USDA, S.C.S
109 method (United States Department of Agriculture, Soil Conservation Service) as:

$$110 ER = P_t \left[\frac{125 - 0.2 \times P_t}{125} \right] \text{ for } P_t < 250 \text{ mm} \quad \dots (2.2)$$

$$111 ER = 125 + 0.1 \times P_t \text{ for } P_t > 250 \text{ mm} \quad \dots (2.3)$$

112 ER = Effective rainfall (mm); P_t= Total rainfall (mm)

113 In this study the calculation of crop coefficient (K_c) for different growth stages of tomato
114 were considered based on the published report and local studies carried out in India. The crop
115 coefficient K_c values are varying with the type of crop, its growing stage, growing season and
116 prevailing weather conditions. The crop coefficient values for initial stage K_{c init} was taken as 0.6,
117 for mid stage was taken as 1.15 and for end stage it was taken as K_{c end} as 0.80 for open
118 environment. For inside polyhouse, the crop coefficient values for initial stage K_{c init} was taken as
119 0.6, for mid stage was taken as 1.40 and for end stage it was taken as K_{c end} as 1.0.

120 2.4 Regression analysis

121 Simple linear regressions were used in order to determine the correlation between
122 estimated daily reference evapotranspiration (ET_o) by different models with estimated from FAO
123 Penman model from polyhouse and open environment. Root mean squared error (RMSE),

relative error (RE), agreement index (D) and the coefficient of determination (R^2) were also used for model's evaluation and calculated as follow:

$$RMSE = \sqrt{\frac{1}{(N)} \sum_{i=1}^N (E_i - O_i)^2} \quad \dots (2.4)$$

$$RE = \frac{RMSE}{ET_{Omean}} \times 100 \quad \dots (2.5)$$

$$D = 1 - \frac{\sum_{i=1}^n (O_i - E_i)^2}{\sum_{i=1}^n (|E_i - O_i| + |O_i - O|)^2} \dots (2.6)$$

The value of D is 1.00 indicates perfect agreement, whereas, its values of 0.00 indicates a poor agreement (Willmott, 1984; Legates and McCabe, 1999).

Where; E_i is the estimated ET_0 with different models, O_i is ET_0 estimated with FAO-PM Model, at the i^{th} data point and n is the total number of data points.

Linear regressions to determine the correlation of estimated daily ET_0 values with the FAO-PM Model values, as follows

$$ET_{O-DMO} = a (ET_{O-FAO PM}) + b \quad \dots (2.7)$$

Where; ET_{O-DMO} and $ET_{O-FAOPM}$ represent the value of ET_0 estimated by different models and ET_0 by FAO-PM Model, respectively. Whereas, a and b are the regression coefficients. The best prediction method according to linear regression is the one which has the highest coefficient of determination (R^2), b value closest to zero and a value closest to unity. Despite being widely used to assess the "goodness of fit" of evapotranspiration equations, R^2 is oversensitive to extreme values and is insensitive to additive and proportional differences between estimated and measured values. Considering these limitations, R^2 values might misjudge the best method, when used alone. Therefore, method performance was evaluated by using both regression and different indices like RMSE, RE and D.

3. RESULTS AND DISCUSSION

3.1 Performance of Different Reference Evapotranspiration Models Under Playhouse and Open Environment

The results indicate that under polyhouse conditions, FAO Penman and Hargreaves models were the most and the least appropriate models, respectively. The slope of the linear regression equation in the FAO Penman model was 0.997 which is near to 1.0 and the R^2 was 0.999, which is also near to 1. The values of the RMSE and RE for the FAO Penman models were (0.0097 and 0.779%). According to the value of a , b , R^2 , D, RSME and RE, the FAO Penman model showed better performance than other models. The Priestley Taylor and Stanghellini models were placed as the second and third best models respectively. Jhajharia *et al.* (2004) also found the similar result as mentioned in Table 3.1. Whereas, in open environment, FAO Radiation and Stanghellini models were found to be the most and the least appropriate models. The slope of the linear regression equation in the FAO Radiation model was 1.030, which is close to 1.0. The intercept value was 0.166 which is close to zero and the R^2 was 0.916, which is close to 1. The value of the RMSE and RE for the FAO Radiation were (0.660 and 17.18 %) but higher than FAO Penman. According to the value of R^2 , RSME and RE, the FAO

Formatted: Font color: Red

Penman model showed an even better performance than the FAO Radiation model. But the slope of the straight regression line and the intercept in the FAO Penman model were 0.807 and 0.716 which were not satisfying. So, FAO Penman and Priestley Taylor models were placed as the second and third best models respectively (Table 3.2). The results are in agreement with earlier investigators (Moazed *et al.*,2014).

Table 3.1: Ranking and statistical analysis of different daily ET₀ model estimations vs. FAO PM Values under polyhouse

Sr. No	ET ₀ Models	Rank	a	b	R ²	RMSE (mm/day)	RE (%)	D
1	FAO Penman	1	0.99	0.004	0.99	0.0097	0.77	0.992
2	Priestley Taylor	2	1.26	-2.00E-14	1.00	0.355	2.83	0.923
3	Stanghellini	3	1.78	-0.495	0.91	0.717	5.73	0.808
4	FAO Radiation	4	1.20	0.021	0.57	0.639	5.11	0.788
5	Hargreaves	5	0.27	0.259	0.48	0.775	6.18	0.552

a and b - linear regression coefficients, R² - Coefficients of determination, RE- Relative error, RMSE- Root mean squared error, D- agreement index

Table 3.2: Ranking and statistical analysis of different daily ET₀ model estimations vs. FAO PM Values under the open environment.

Sr. No	ET ₀ Models	Rank	a	b	R ²	RMSE (mm/day)	RE (%)	D
1	FAO Radiation	1	1.030	0.166	0.916	0.660	17.18	0.972
2	FAO Penman	2	0.807	-0.716	0.945	0.523	13.60	0.967
3	Priestley Taylor	3	0.820	0.477	0.846	0.779	20.25	0.952
3	Hargreaves	4	0.773	1.390	0.846	0.923	23.99	0.931
4	Stanghellini	5	1.378	-0.729	0.832	1.563	40.65	0.892

a and b - linear regression coefficients, R² - Coefficients of determination, RE- Relative error, RMSE- Root mean squared error, D- agreement index

3.2 Effect of Different Level of Irrigation on Yield and Water Productivity of Tomato Crop under Polyhouse and Open Environment

The maximum average weight of fruit produced was in treatment T₂ i.e 106.66 gm in polyhouse. Table 3.3 shows that the effect of the treatments on the average fruit weight was found to be significance. The average weight of fruit was found in treatment T₉ which was 29.30 % less than that of control. The maximum production observed was 18.97 kg/m² in treatment T₂ while the minimum was 6.12 kg/m² in treatment T₉. The treatment T₃ showed only a small difference with control and the production was almost the same.

In polyhouse the average yield per plant in treatments T₁, T₂, T₃, T₄, T₅ and T₆ were 4.78, 5.14, 5.01, 4.56, 3.92 and 3.52 kg/ plant, respectively, where as for open environment the average yield per plant in treatments T₇, T₈ and T₉ were 2.54, 2.04 and 1.64 kg/ plant, which is

189 lower than that of control (T₂). From Table 3.3, it reveals that the effect of various treatments on
 190 average yield per plant was found to be significant. The yield was found maximum in control
 191 followed by treatment T₃.

192 The effect of various treatments on water productivity was found to be significant. The
 193 water productivity is the amount of water applied to produce one kg of tomato, which was
 194 maximum (20.47 l/ kg) for T₇ (100% of ET_c) in an open environment. Whereas, the amount of
 195 water required producing one kg of tomato ranged from 4.84 to 7.94 l/kg under polyhouse
 196 condition.

197

198 **Table 3.3: Effect of various treatments on tomato fruit weight, yield per plant, yield per**
 199 **meter square, water use efficiency and water productivity under polyhouse**
 200 **and open environment**

Treatments	Fruit weight (gm)	Yield (kg) per plant	Yield (kg/m ²)	WU (m ³ /plant)	WUE (kg/m ³)	Water productivity (l/kg)
T ₁	96	4.78	17.64	0.038	125.78	7.94 b
T ₂	106.66	5.14	18.97	0.038	135.26	7.39 b
T ₃	103.33	5.01	18.50	0.029	172.75	5.78
T ₄	92.44	4.56	16.83	0.029	157.24	6.35
T ₅	89.41	3.92	14.47	0.019	206.31	4.84
T ₆	85.13	3.52	12.99	0.019	185.26	5.39
T ₇	90.12	2.54	9.38	0.052	48.84	20.47 a
T ₈	82.14	2.04	7.56	0.039	52.30	19.12 a
T ₉	75.33	1.65	6.12	0.026	63.46	15.75 a
CD (P<0.05)	9.91	0.83	3.08	0.010	4.25	2.43
SEM (±)	4.04	0.34	1.25	0.004	16.84	0.98
CV (%)	10.87	19.72	19.72	33.26	36.37	31.36

201

202 5 CONCLUSIONS

203 Based on the summary results of the study on “Evapotranspiration based Irrigation
 204 Scheduling of Tomato Crop under Naturally Ventilated Polyhouse”, the following main
 205 conclusions are drawn:

- 206 1. The FAO Penman and Hargreaves model are found to be most and least appropriate
 207 models for estimating daily ET₀ under polyhouse. Whereas, FAO Radiation and
 208 Stanghellini model observed to be most and the least appropriate models in an open
 209 environment for estimating daily ET₀ for the Pantnagar tarai condition of
 210 Uttarakhand.

2. The average water requirement for tomato crop under polyhouse and open environment were 0.2149 and 0.2924 lpd/plant, respectively shows that the water requirement in open environment was 30 % higher than that of polyhouse.
3. The production of a tomato crop under polyhouse may be achieved to the level of 18.97 kg/m² at 100 % level of water use (100 % of ET_c without mulch) with the water productivity of 7.39 l/kg. Whereas, the production of tomato crop in the open environment may be achieved to the level of 9.38 kg/m² at 100 % level of water use (100 % of ET_c without mulch) with the water productivity of 20.47 l/kg.

References

- Jhajharia, D., Deb Barma, S. and Agrawal, G. 2004. Comparison of pan evaporation-based reference evapotranspiration model with Penman Monteith FAO-56 model. *Journal of Agricultural Engineering*, 41(3): 46-52.
- Jhajharia, D., DebBarma, S. and Agrawal, G. 2004. Comparison of simpler radiation-based ET models with Penman Monteith model for humid region. *Journal of Agricultural Engineering*, 41(4): 32-36.
- Hargreaves, G. H., & Samani, Z. A. 1985. Reference crop evapotranspiration from temperature. *Applied Engineering in Agriculture*, 1(2): 96-99.
- Legates, D. R. and McCabe, G. J., 1999. Evaluating the use of “goodness of fit” measures in hydrologic and hydroclimatic model validation. *Water Resour. Res.*, 35(1): 233-241.
- McMahon, T. A., Finlayson, B. L. and Peel, M. C. 2016. Historical developments of models for estimating evaporation using standard meteorological data. *Wiley Interdisciplinary Reviews: Water*, 3(6): 788-818.
- Moazed, H., Ghaemi, A. A. and Rafiee, M. R. 2014. Evaluation of several reference evapotranspiration methods: a comparative study of greenhouse and outdoor conditions. *Iranian Journal of Science and Technology. Transactions of Civil Engineering*, 38(C2): 421.
- Oudin, L., Hervieu, F., Michel, C., Perrin, C., Andréassian, V., Anctil, F. and Loumagne, C. 2005. Which potential evapotranspiration input for a lumped rainfall-runoff model. Part2- Towards a simple and efficient potential evapotranspiration model for rainfall-runoff modelling. *Journal of Hydrology*, 303(1-4): 290-306.
- Tegos, A., Malamos, N. and Koutsoyiannis, D. 2015. A parsimonious regional parametric evapotranspiration model based on a simplification of the Penman-Monteith formula. *Journal of Hydrology*, 524: 708-717.
- Willmott, C. J. 1984. On the evaluation of model performance in physical geography. *The Netherlands*, 443-460.

246 Singh, V. K., Tiwari, K. N., & Santosh, D. T. (2016). Estimation of Crop Coefficient and Water
247 Requirement of Dutch Roses (*Rosa hybrida*) under Greenhouse and Open Field
248 Conditions. *Irrigat Drainage Sys Eng*, 5(169), 2.

249 Parvizi H, Sepaskhah AR, Ahmadi SH (2014) Effect of drip irrigation and fertilizer regimes on
250 fruit yields and water productivity of a pomegranate (*Punica granatum* (L.) cv. Rabab)
251 orchard. *Agricultural Water Management*. 146: 45-56.

252 Tiwari KN, Kumar M, Santosh DT, Singh VK, Maji MK (2014) Influence of drip irrigation and
253 plastic mulch on yield of Sapota (*Achras zapota*) and Soil Nutrients. *Irrigation and*
254 *Drainage Sys Eng*. 3: 116.

255

256

257