1	Original Research Article
2	
3	Impacts of Coal Stockpile on Soil and Water
4	
5	

6 ABSTRACT

7 In this study, the soil and water samples were analyzed to evaluate the effects of coal stockpile on soil and 8 water quality at Haluaghat Upazilla, Mymensingh, Bangladesh. As a natural resource, coal has potential 9 contributions to the development of economics of a country but coal storage deteriorates surrounding 10 surface and ground water and soil quality in different ways. Besides, it has significant impacts on the arable 11 lands and water catchments. The analyses of 10 soil and 10 water samples (5 samples from ground water and 12 5 samples from surface water) were collected at 0 m, 200 m, 500 m and 700 m distance from the coal 13 storage area were carried out using standard methods. The pH, electrical conductivity (EC), organic matter (OM), macronutrients (N, P and K) and heavy metals (Lead and Cadmium) were analysed for soil samples 14 15 and for water samples pH, EC, macronutrients (P and K), heavy metals (Pb and Cd) were analysed. From the results, it was observed that most of the value of soil and water quality components were higher at close to 16 the coal stockpile area and gradually decreased with distance. Soil pH value showed a decreasing treand (5.2 17 18 to 3.2) with increasing distances from the coal storage area; whereas water pH increased gradually with increasing distances from the coal storage area. Soil OM content was found highest at the coal storage area, 19 which decreased gradually with increasing distance. The content of soil N, P, K was also recorded highest at 20 the coal storage area which followed decreasing trend with increasing distance. The content of Pb and Cd in 21 22 23 soil adjacent to coal storage area was higher compared to distant areas (500-700 m) in paddy field.

Keywords: Coal, natural resource, coal storage, pH, paddy field

26 INTRODUCTION

27 Coal is mostly used fuel in electricity generating sector worldwide. It supplies near about 27% of the primary energy 28 need worldwide. Total global production of bituminous and anthracite (hard coal) was 3837 million tonnes in 2002 29 and the brown coal production was 877 million tonnes (World Coal Institute 2004, Coalportal 2004 and Australian 30 Coal Association 2004). According to World Coal Institute (2004) and Coalportal (2004), major hard coal producer 31 countries are China (1326 million tonnes), U.S.A. (916.7 million tonnes) and India (333.7 million tonnes) by year 32 2002. Brown coal is mainly produced by Germany, Greece and North Korea. International trade of coal is 33 dominated by hard coal (mainly bituminous type). Hard coals are used as thermal coal and for the manufacture of 34 steel as coking coal. Coal mining is one of the major industries responsible for different types of environmental 35 pollution. The primary challenge of coal mining to the ecosystem could be harmful impacts to water bodies (Pan et 36 al., 2012; Bai et al., 2011). A lot of toxic metals, low pH levels, and suspended solids are some other aspects of 37 contaminated water from coal mining or storage site. Coal is the most bountiful fossil fuel in this world (Ramani, 38 2013) that consists about 75% of the global fuel reserves (Elliott, 1981). It contributes 39% of total electricity 39 generation all over the world (Brown, 2002). Coal is also burnt to produce heat or liquefied to produce gas. Tiwary 40 (2001) reported effects of coal mining on the environment cannot be misjudged though it plays a vital role for 41 economic development of a country. Storing or mining operation in a wrong way is a reason of landscape damage, 42 loss of forestry, surface and ground water pollution that leads to huge loss of ecosystem components (Toren and Unal, 2001). Some components of coal such as polycyclic aromatic hydrocarbons (PAHs) and heavy metals cause 43 44 adverse biological effects at high concentrations. Coal is formed from organic materials after decomposition 45 undergoing geologic heat and pressure over millions of years. It is considered as nonrenewable resource (EPA, 46 2000). Carbon dioxide, sulfur dioxide, nitrogen oxides and mercury compounds are released when coal is burnt. For 47 that reason, coal-fired boilers in industries are required to have control devices to mitigate the harmful gas emission. 48 To remove impurities from coal, huge quantities of water are needed at the mine site and coal-fired power plants use

- 49 considerable amount of water to produce steam and for cooling purpose. When power plants discharge waste water
- 50 into river, aquatic organisms and water quality can be affected.

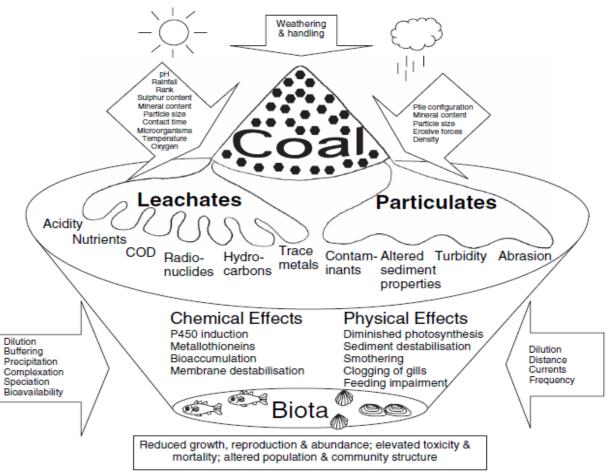


Figure: Impacts of coal in the aquatic environment. Influential factors are in boxed arrows. (Ahrens and Morrisey, 2005)

56 There are some environmental impacts of coal that occur through its mining, combustion, waste storage, and 57 transport related activities. There are some health effects caused by coal. In 2007, world coal consumption reached 58 at 5,522 million tons, showing about 3.5% increase annually (Pusdatin, 2011). Ghosh (1990) reported that, about 4 59 ha land is damaged in India, for every million tonnes of coal extracted by surface mining. The coal industry was 60 solely responsible for biologically unproductive area of about 500 ha a year during 1994–95. This increased to 1400 61 ha by 2000 (Chari et al., 1989). There are some changes in the physical, chemical and microbiological parameters of 62 soils as a result of coal storage. Some are caused by the construction of the storage (Sandlein et al., 1983). In 63 abandoned mines, topsoil is very important for the growth of vegetation and has to be conserved for land 64 reclamation after mining (Kundu and Ghose, 1994). The quality of soil will be biologically sterile if it is not 65 properly conserved. 66

67 Coal from the mine area is transported by road to the stockpile to further transport by barges. Stockpile is a 68 temporary dump place before the coal is transported through the waterways to be marketed. The coal stockpile in 69 Gubrakura, Haluaghat is one of the few prominent stockpiles in Bangladesh, which is located vicinity to the

70 Bangladesh-India border (near Meghalaya states of India) of an area of about 50 acres. The stockpile location is very

strategic because it can be passed by a barge as a transporter of coal to market. Although the location of the

72 stockpile is far from the main road of the Haluaghat and locality, activities in the stockpile generate significant 73 amount of dust, wastes to the surrounding environment. The liquid waste from stockpile can reduce the degree of

acidity (pH) and increase the content of total suspended solids (TSS), ferrous (Fe) and manganese (Mn) (Ahrens,

75 2010). High suspended solids reduce the penetration of sunlight into the water which adversely affects the

- regeneration of oxygen in the photosynthesis process. On the other hand, excess Fe may affect the lives of aquatic
- organisms and may cause rust on the metallic equipments. Abnormal pH value of water that is not in the standard range may affect aquatic organisms, such as fish and other animals. Additionally, an abnormal pH is corrosive to
- 78 range may affect aquatic organisms, such as fish and other animals. Additionally, an abnormal pH is corrosive to 79 metals (Akcil and koldas, 2006). Considering the role of a stockpile to surrounding ecosystem, soil and water quality
- analysis around coal stockpile at Haluaghat, Mymensingh to justify its fitness for various applications was
- 81 performed.82

83 MATERIALS AND METHOD

84 Study area

85 Samples were collected from different distances of coal storage at Gobrakura, Haluaghat (about 60 km away

- 86 from Mymensingh sadar upazila). The total area of stockpile is about 50 acre. The area is surrounded with
- 87 village except north. The storing of coal has been started since 1997. Coal is imported from Meghaloy of India.
- 88 Many dealers are involved with this business. They store coal for some days or months until selling or
- 89 transporting to other areas of the country. Coal from this storage is supplied to different brickfields and
- 90 markets. Photographic view and map of the experimental site are presented below:
- 91

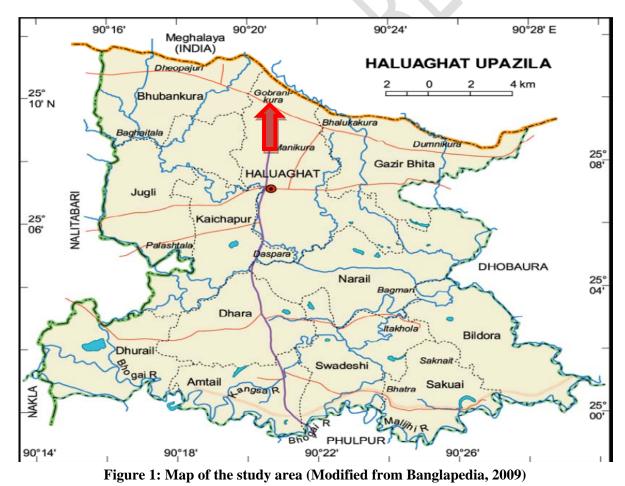








Figure 2: Coal stockpile

Figure 3: Drain water from coal stockpile area

99 Sample collection and preservation

100 A total 20 samples (10 soil samples and 10 water samples) were collected from the selected locations. The samples were 101 collected from 0m, 200m, 500m and 700m distances from storage area. Water samples were collected in 100 ml plastic 102 bottles. The bottles were washed with distilled water prior to collect the samples, 10 samples collected without acid and 10 103 samples with acid. After collection, plastic bottles were labeled and sealed immediately to avoid direct exposure to air. 10 ml 104 2M HNO₃ was mixed with 90 ml of sample for heavy metal study. Samples were kept in a cool place until chemical analyses. Soil samples were collected from 0-30 cm depth and kept in polythene bags. After completion of soil sampling, the unwanted 105 106 materials were discarded from sample. The samples were dried at room temperature, then crushed and mixed thoroughly and 107 sieved with a 20 mesh sieve. Finally, about 200 gm soils were taken for subsequent laboratory analysis. 108

109 Soil Quality Assessment

110 pH, Electrical Conductivity (EC), Organic matter (OM), Nitrogen (N), phosphorus (P), Potassium (K) and Heavy metals (Pb 111 and Cd) of soil samples were analyzed to investigate soil quality. It is important to know the physicochemical properties of 112 soil for successful crop production and other purposes. In this study soil pH were measured by pH meter and EC of soil samples were measured by an EC meter (Model- D.6072 Dreieich, West Germany). Available potassium was extracted by 113 114 neutral ammonium acetate and determined directly by flame photometer at the wave length of 766.5 to 769.5 nm. Available 115 Phosphorus present in soil was determined by Olsen's method colorimetrically, where SnCl₂ was used as reductant. The 116 Kjeldahl method is a method for the quantitative determination of nitrogen in chemical substances developed by Johan 117 Kjeldahl in 1883. Nitrogen was determined by this method in this study. The determination of heavy metal concentration (Pb

- and Cd) in soil samples was done by using an Atomic Absorption Spectrophotometer (AAS) in AAS laboratory.
- 119

120 Water Quality Assessment

121 Analysis of different physicochemical properties (pH, EC, concentration of P, K and heavy metals viz. Lead and Cadmium) 122 of the water samples was performed. Water pH was measured by a pH meter. The electrical conductivity of water samples 123 was measured by an EC meter (Model- D.6072 Dreieich, West Germany. Phosphorus of water samples was determined 124 colorimetrically by SnCl₂ method according to the procedure outlined by Jackson (1967) and Tandon (1993). In this method, 125 stannous chloride (SnCl₂.2H₂O) was used as a reducing agent which formed molybdophosphoric blue complex with 126 sulphomolybdic acid. Exactly, 20 ml water sample was taken in a 100 ml volumetric flask followed by the addition of 4 ml 127 sulphomolybdic acid and 4-6 drops of stannous chloride (SnCl₂.2H₂O) solution. The color intensity was measured at 890 nm 128 wavelength with the help of a spectrophotometer (Double Beam Spectrophotometer) within 15 minutes after the addition of 129 stannous chloride. Potassium was determined separately with the help of a Flame photometer (Model Jenway PFP7). The 130 determination of heavy metal concentration viz. Lead (Pb) and Cadmium (Cd) in water samples was done by using an

Atomic Absorption Spectrophotometer (AAS). Mono element hollow cathode lamp was employed for the determination of

- 132 each heavy metal. At first, the AAS was calibrated followed by the manufacturer's recommendation. The filtered water
- sample was run directly for the determination of heavy metal in acidified condition. A standard line was prepared by plotting
- the absorbance reading on Y-axis versus the concentration of each standard solution of metal on X-axis. Then, the
- concentration of metal was calculated in the water samples by plotting the AAS reading on the standard line.

136 **RESULTS AND DISCUSSION**

137The study was carried out to find out the status of soil and water in coal stockpile area. Soil and water samples were collected138from ten different locations. The salient features of the study results have been presented and discussed below.

140 Effect of coal storage on soil quality

141 Soil pH

- Soils can have a pH from 3.5 to 11.0, but plants grow well in the range of 5.0 to 8.5. Brady (2002) reported that a
- pH range of 6.5 to 7.5 is optimal for necessary plant nutrient availability. If the soil solution is too acidic plants cannot uptake
 N, P, K and other nutrients. In acidic soils, plants uptake toxic metals and some plants die as a result of toxicity. Therefore, it
- N, P, K and other nutrients. In acidic soils, plants uptake toxic metals and some plants die as a result of toxicity. T
 is important to know the pH level suitable for crop production. The pH rating is shown below:
- 146

Soil pH	Ratings
9	Harmful to crops
8-9	Harmful to most of the crops
6-8	Good for all crops
6-5	Slight harmful to the crops
<5	Harmful to crops

147


148 The pH values of soil samples around coal storage have been presented in Figure 4. From the Figure it is observed that pH

value significantly varied with distances. The values ranged from 3.2 to 5.2 at 0-700m distance. Among the locations, the

highest pH value was found at 0 m, which was very close to the pH values of the samples collected from 200 m distance

151 (5.15). The lowest pH value was recorded at 700 m distance. The pH value at the coal storage area and adjacent area was

higher compared to distance area, probably due to the effect of liming materials from coal.

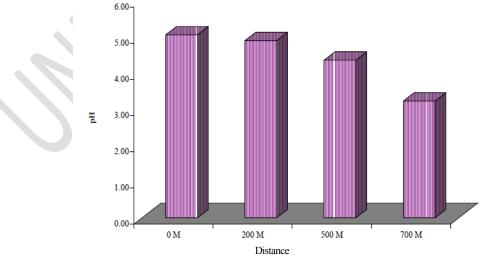


153 154 155

Figure 4: pH values of soil at different distances from coal storage

156 Soil Electrical conductivity (EC)

The EC values of soil samples significantly varied with distance (Figure 5). It was observed that values ranged from 19.0-61.50 μ s/cm. Among different locations, maximum EC value was found 61.50 μ s/cm at 0 m distance and minimum EC value was found as 19.00 μ s/cm at 700 m distance. EC is the common measure of dump materials salinity and denotes the ability to carry an electric current. For coal mine soil, Saxena (1989), proposed that while EC < 4 dS/m may be considered to be good for plant productin. EC values within the range of 7-8 dS/m might be acceptable and soil with an EC value 8 dS/m should be considered to be of poor soil quality. The higher EC value was due to upward migration of different type of salts with presence of coal particles and the lower EC value was due to lower amount of salts present in the soil samples.

164

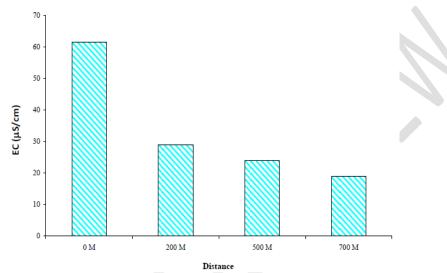

165 166


Figure 5: EC values of soil at different distances around coal storage

167 Soil organic matter content

Soil organic matter content was gradually decreased with the distance from the storage area. The lowest OM content was observed at 700 m and highest at 0 m distance. OM ranged from 0.20 to 1.10%. OM is important for the productivity of

arable lands. Production varies with OM content in soil. Presence of organic matter components in storage area define SOM

or soil organic matter. It can be divided into three pools: living biomass of microorganisms, fresh and partially decomposed
 residues, and humus. According to Juma (1999), surface litter is not a part of soil organic matter.

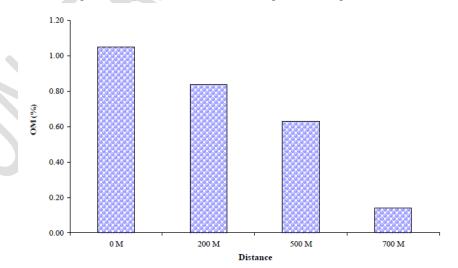

173

174 Figure 6: Organic matter of soil collected from different distance around coal storage

175 Soil nutrient content

- 176 From the Figure 7, it is observed that N content was greatly depends on distance from storage area. Maximum content was
- 177 found at 0 m due to higher amount of mineralizable matter present in
- soil and lowest was at 700 m due to lower rates of mineralization in soil. N content ranged from 0.02-0.095%. N content is
- 179 important factor for the productivity of soil. The nitrogen used by plants or crops on dump materials comes from SOM,
- 180 fertilizers and legumes (Maiti *et al.*, 2002).

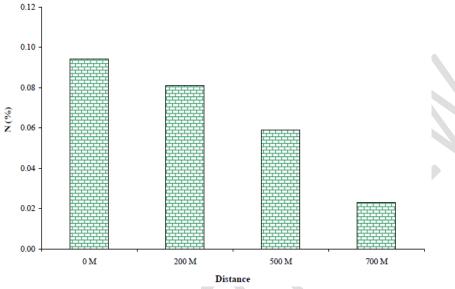




Figure 7: N content of soil collected from different distance around coal storage

185 The concentrations of P of soil samples have been presented in Figure 8, where it is observed that concentrations of P in soil

around coal storage was high and gradually decreased with increase the distance. The standard value of phosphorus in soil

- 187 should be 22.5 to 56 kg/ha (Gupta *et al.*, 2006). The concentrations of P ranged from 11.40 to 16.54 ppm which is agreed with
- 188 (Tripathy et al., 1998) in soils of Jharia coalfield.

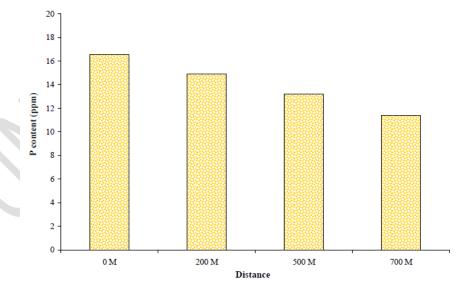







Figure 8: P content of soil collected from different distance around coal storage



192 The standard potassium content in the alluvial soil should be in between 136-337.5 kg/ha (Gupta *et al.*, 2006; Sumner, 1994).

193 The concentrations of K of soil samples have been presented in Figure 9, where it is observed that concentrations of K in soil

- around coal storage significantly varied with distances. The concentrations of K ranged from 20.37 to 97.77 ppm. The higher
- 195 K content in 0 m distance indicated that the K in coal was more readily available than the fertilizers K applied to the soil but 196 overall K level is lower than standard value in the study area.

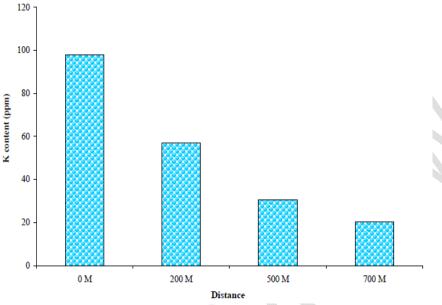



- Figure 9: K content in soil collected from different distance around coal storage
- Mohapatra (2006) analysed soil arond five opencast coal of a river coal area. The N, P and K content of that study were 2.845,
 1.11 and 2.63 kg/ha respectively.
- 201 1.11 and 2.63 kg/f

198

203 Soil heavy metal content

- The concentration of Pb ranged from 0.58 to 0.745 ppm and that of Cd ranged from 0.105 to 0.18 ppm. Both the content of Pd and Cd were higher at storage area and gradually decreased with distance (Figure 10). The permissible limit of Pb and Cd
- in soil stated by Alloway (1995) is presented in the table below:
- 207

Location	Pb (mg/kg)	Cd (mg/kg)
Normal Limit	2-300	0.01-2.0
Critical Limit	100-400	3-8

208

209 The content of Pb and Cd of the study area did not exceed the permissible limit. Therefore, it can be said that Pb and Cd 210 content of soil in the study area is not harmful for agricultural uses

content of soil in the study area is not harmful for agricultural uses.

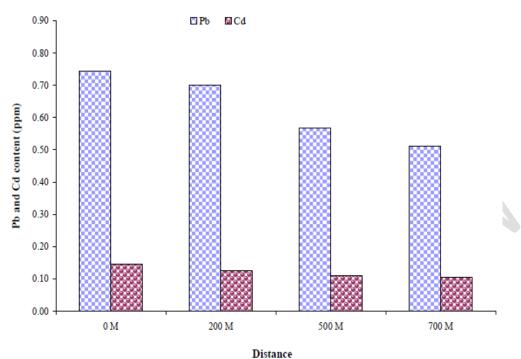




Figure 10: Heavy metals in soil samples collected around coal storage



215 Water pH

The pH values of ground water samples around coal storage have been presented in Figure 11. From the result it was observed that pH values of ground water significantly varied with distances. The pH values ranged from 3.2 to 6.5. Among the locations, the highest pH value was found at 700 m, which was very close to the pH values of the samples collected from 500 m (6.44). The lowest pH value was noted at 0 m distance (3.2). The pH values of surface water samples were also significantly varied with distances (Figure 11). Among the locations, the highest pH values (6.5) were recorded at 500 m and 700m distances from the storage area. The lowest pH value was recorded from 0 m distance. It was interesting to note that surface water pH values was significantly higher compared to underground water in all distances from the storage areas.

Coal storage is known to affect both the surface and groundwater. Topography and drainage system of an area of coal storage 225 226 may influence different types of pollution. The pH of the surface water was comparatively more alkaline in nature than 227 ground water. Coal storage produces acid leachates which lead to acidic groundwater. Water runoff from coal stockpile can 228 be highly acidic leading to low pH in water (Scullion and Edwards 1980, Carlson and Carlson 1994). The acidity of coal 229 leachates is primarily due to the function of coal's sulphur content, such as highly sulphur rich coals normally have low pH 230 values and sulphur-poor coals produce more pH neutral runoff (Tiwary 2001, Cook and Fritz 2002). The strong acid-231 producing potential of coal stockpile runoff has been confirmed in numerous studies of actual leaching of coal stockpiles 232 (Hall and Burton 1982, Tease and Coler 1984, Cook and Fritz 2002) and has been shown negative effects on groundwater

quality (Carlson 1990, Cook and Fritz 2002).

234

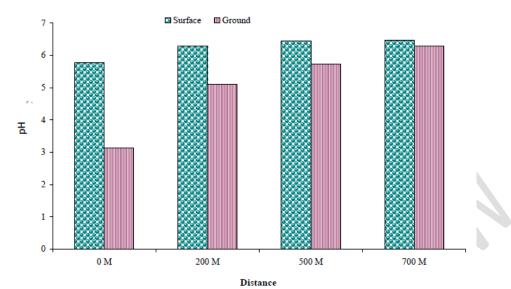




Figure 11: pH of surface and ground water at different distance around coal storage

238 Water EC

The EC values of surface water samples significantly varied with different distance (Figure 12). From the figure it is observed that values ranged from 88.60 to 136.10µs/cm. Among different locations, maximum EC value was found 136.10µs/cm at 700 m distance. The EC values of ground and surface water samples significantly varied with different distance. It is observed that EC values ranged from 38.20- 125.15µs/cm. Among different locations, maximum EC value was found 125.15µs/cm at 700 m distance and minimum EC value was noted as 38.20µs/cm at 0 m. EC varies with distance and related elements.

Coal pile runoff often leads salinity, due to salts formed from the oxidation and dissolution of mineral components of coals. While coal-generated salinity may not be important for the aquatic environment but the elemental composition of coal pile runoff may differ from surface or ground water. Electrical conductivity (EC) over $8000 \,\mu$ S/cm has been measured in runoff of sulphur-rich coal piles (Nichols 1974, Carlson and Carlson 1994). Coal pile salinity may affect terrestrial and freshwater biota. Rendig and Taylor (1989) reported death of terrestrial vegetation was observed at EC values above 4000 μ S/cm for soil solutions.

- 251
- 231
- 252
- 253
- 254
- 255
- 256
- 257
- 258
- 259

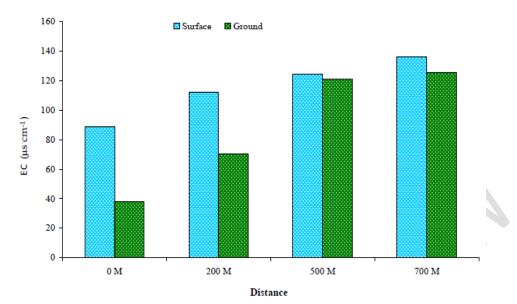




Figure 12: EC values of surface and ground water at different distance around coal storage


262

263 Phosphorus and Potassium content in water samples

The concentrations of P of surface water samples have been presented in Figure 13. From the result, it is observed that concentrations of P in water around coal storage significantly varied with distances. The concentrations ranged from 0.27 to 0.85 ppm. The concentrations of P of ground water samples also have been presented in Figure 13. The concentrations of K in surface and ground water samples have been presented in Figure 14. From the result, it is observed that concentrations of K in water around coal storage varied when distances varied. The concentrations ranged from 0.28 to 1.05 ppm. It was higher at 0 m distance and lowest at 700 m distance. Considering ground water, it is observed that concentrations of K in water were higher at 0 m distance and lower at 700m distance.

272 There are a very few published papers on availability of macronutrients into the aquatic environment from coal storage. Coal 273 does contain nitrogen and phosphorus in considerable quantities and these nutrients can be mixed with water. Most coals 274 contain between 10-2000 ppm phosphorus (Francis 1961, Swaine 1990, Rao and Walsh 1997). Phosphorus content is often 275 correlated with fluorine (Francis 1961). Gerhart et al. (1980) reported 0.02-0.12 mg/l of total P in filtered leachates containing 276 0.8% sub-bituminous coal. Ward (2002) worked with south Australian coals and found up to 60% of P to be leachable by 277 water washings, Ouerol et al. (1996) found between 88–94% of the phosphorus contained in four Spanish coals (P content 278 68-200 ppm) to be leachable by nitric acid digestion and a little amount of P was mobilised by water of the same coal 279 samples.

- 280
- 281
- 282
- 283
- 284

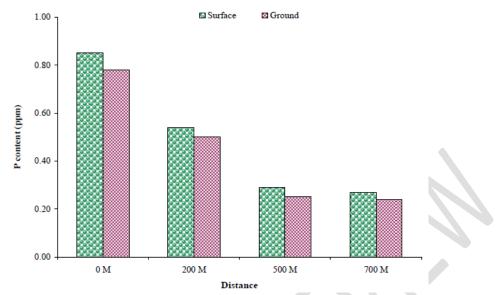

285 286

Figure 13: Available P in surface and ground water at different distance around coal storage

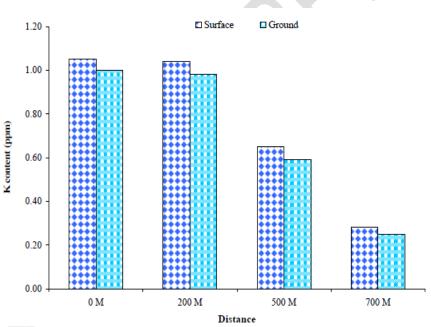




Figure 14: Available K in surface and ground water at different distance around coal storage

289 290

291 Heavy metals content of water

Among heavy metals, the content of Lead (Pb) and Cadmium (Cd) was examined in surface and ground water around coal storage. Concentrations significantly varied with locations and time. The concentrations Pb and Cd of the surface water samples have been shown in Figure 15. It was observed that concentrations of Pb ranged from 0.026 to 0.069 ppm and that of Cd was 0.005 to 0.010 ppm. The concentrations of Pb and Cd in the ground water samples have been shown in Figure 16. It was observed that concentrations of Pb ranged from 0.024 to 0.067 ppm and that of Cd was 0.006 to 0.013 ppm.


Coal contains some trace metals. Metals may be present as dissolved salts in waters as metallo-organic compounds or as
 mineral impurities. Data on trace metals in coal has been reviewed by Swaine (1990), Swaine and Goodarzi (1995). Every


type of coal contains a sizable inorganic fraction which can release trace metals (Ward 2002). The forms in which potentially

300 toxic trace elements are held in coal may vary among coals and greatly depends on the mineral matter present on coal. Many

301 experiments have designed links between the minerals present in coal and the concentration of trace elements (Ward 2002).

- 302 For example, Cd, Pb, Hg, Sb, Se, Tl and Zn are often associated with sulphides and show strong correlation with minerals
- 303 present in coal. The sulphur rich coal stockpile leachate helps dissolution of trace metals (Anderson and Youngstrom, 1976).
- 304 Trace metal concentrations in runoff from coal storage can be so high as to endanger groundwater quality (Cook and Fritz, 2002).
- 305
- 306
- 307

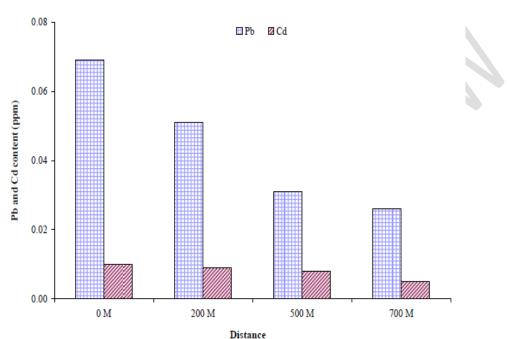

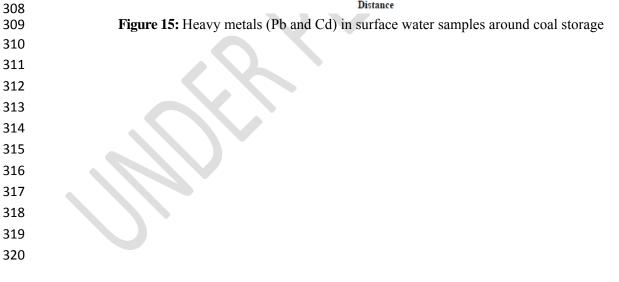

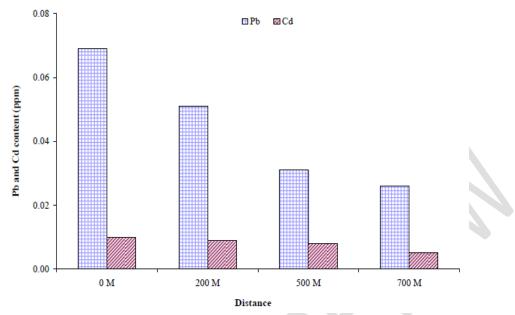




Figure 16: Heavy metals (Pb and Cd) in ground water samples around coal storage

328

From the results, it is found that all the studied soil and water quality components are higher at coal adjacent area and gradually decreased with distance. The probable reason for that these components may be available in coal which increases the availability of all studied components at 0 m distance. However, to find out the causes of the higher values, it is needed to analyze physical and chemical properties of coal in future researches.

329 CONCLUSION

Coal is considered as cheap source of energy worldwide but coal and leachate from coal storage has been associated with negative impacts on soil and water quality. Location of stockpile at Gobrakura, Haluaghat, Mymensingh has a significant impact on surface and ground water and soil quality. Loading and unloading coal from this storage also cause noise and influence the air quality at the site of stockpile. Surface and ground water quality is affected by measured pH value, EC, macronutrients level and heavy metal (Pb, Cd) contents. The investigated physicochemical properties of soil might interfere with fertility and productivity of soil in the stockpile area. The effluents from the coal stockpile should be processed before it is discharged to nearest area or water catchments.

Almost all the investigated soil and water quality parameters were higher at coal stockpile adjacent area and were lower in 700 m, 500 m distances. It may be happened due to the availability of these components in coal. However, to find the reasons behind this, it is needed to analyze physical and chemical properties of coal and effluents from coal stockpile should be

- analyzed comprehensively.
- 342

343 **REFERENCES**

- Anderson WC, Youngstrom MP (1976) Coal pile leachate-quantity and quality characteristics. *Journal of the Environmental Engineering Division*, **102**, 1239–1253.
- Ahrens MJ and Morrisey DJ (2005) Biological effects of unburnt coal in the marine environment. *Oceanogr. Mar. Biol.*, 43: 69–122.
- Chari KSR, Banerjee SP, Sengupta SR, Luthm KL, Babu CR, Misra BC, Vijaykumar S and Namdeo R (1989) *Report of the Expert Committee on Restoration of Abandoned Coal Mines*, No. J. 11015/13/88–1A (Dept. of Env. Forest and Wildlife, New Delhi).

- Sendlein VA, Lyle YH, Carison LC (1983) Surface Mining Reclamation Handbook (New York, NY, USA, Elsevier
 Science).
- Kundu NK, Ghose MK (1994) "Studies on the topsoil of an opencast coal mine", *Environmental Conversion* 21(2), 126–
 132.
- World Coal Institute (2004) *Coal Power for Progress*. London: World Coal Institute. Online Available HTTP:
 http://www.wci-coal.com (accessed 30 June 2004).
- Australian Coal Association (2004) Black coal exports from Australia. Australian Coal Association. Online Available
 HTTP: http://www.australiancoal.com.au (accessed 30 June 2004).
- Coalportal (2004) *Production and Trade*. Sydney: Barlow Jonkers Pty Ltd. Online. Available HTTP:
 http://www.coalportal.com (accessed 30 June 2004).
- 361 Pusdatin (2011) Coal Statistic Indonesia "The Dirty Truth about Coal: Mining", Sierra Club, June 2007.
- 362 Akcil A, Koldas S (2006) Acid Mine Drainage (AMD): causes, treatment and case studies. J Clean Prod 14(12):1139–1145
- 363 Ahrens MJ (2010) Biological Effect of Unburnt Coal in the Marine Environment. An Annual Review 43 pp 69-122
- Tiwary RK (2001) Environmental impact of coal mining on water regime and its management. Water, Air and Soil
 Pollution, 132(1-2): 185-199.
- 366 Brady NC, Well RR (2002) The nature & properties of soils, Pearson Education Ltd, New Delhi.India.
- Bai Y, Wang R, Jin J (2011) Water eco-service assessment and compensation in a coal mining region–A case study in the
 Mentougou District in Beijing. *Ecol Complex* 8(2):144–152
- Pan L, Liu P, Ma L, Li Z (2012) A supply chain based assessment of water issues in the coal industry in China. *Energy Pol* 48:93–102
- Ramani RV (2013) Coal mining. Retrieved 10 January, 2013, from http://www.britannica.com/EB
 checked/topic/122975/coal-mining.
- Elliott MA (1981) Chemistry of coal utilization: Second supplementary volume. New York, United States: John Wiley and Sons.
- 375 Brown CE (2002) World energy resources. Berlin, Heidelberg, New York: Springer Verlag.
- Toren T, Unal E (2001) Assessment of open pit coal mining impacts using remote sensing: a case study from
 Turkey. Paper presented at the Proc 17th Int. Mining Congress Exhibition of Turkey, IMCET2001, ISBN.
- Environmental Protection Agency (EPA) (2000) Environmental Impacts of Coal Mining, World Coal Institute, accessed
 April 2008. "The Dirty Truth about Coal: Mining", Sierra Club, June 2007.
- 380 Tandon J (1993) "Modern Irrigated Soils". John Wiley & Sons, New York, pp. 283-250
- 381 Jackson ML (1967) Soil Chemical Analysis, Prentice Hall of India Pvt. Ltd., New Delhi.
- 382 Banglapedia (2009) National Encyclopedia of Bangladesh, Asiatic Society of Bangladesh.
- 383 Saxena MM (1989) Environmental analysis: water, soil and air, Agro Botanical Publishers, Bikaner, Rajasthan, pp 121140.
- Juma NG (1999) Introduction to soil science and soil resources. Volume I in the series "The Pedosphere and its Dynamics:
 A Systems Approach to Soil Science." Salman Productions, Sherwood Park. 335.
- Maiti SK, Karmakar NC, Sinha IN (2002) Studies on some physical parameters aiding biological reclamation of mine spoil
 dump a case study from Jharia coalfield, *IME Journal*, 41(6): pp 20 23.

- 388 Mohapatra (2006) Environmental cumulative effects of Meghalaya, North East India. New York Science coal underground
 389 mining. Procedia Earth and Journal 3(9):79-85
- 390 Ghosh AK (1990) "Mining in 2000 AD challenges for India", J. Institution of Engineers (India) 39(2), 1-11.
- Cook AM, Fritz SJ (2002) Environmental impacts of acid leachate derived from coal-storage piles upon groundwater.
 Water Air and Soil Pollution 135, 371–388.
- Tripathy DP, Singh G, Panigrahi DC (1998) Assessment of soil quality in the Jharia coalfield, Proceedings of the Seventh
 National Symposium on Environment, ISM, Dhanbad, pp 205.
- Gupta S, Mallick T, Datta JK, Saha RN (2006) Impact of Opencast Mining on the soil and plant communities of Sonepur Bajari Opencast Coal mine area, West Bengal, India, UU Special Publication in Geology, v. 5, pp.194-198.
- 397 Sumner, M.: Measurement of soil pH: Problems and solutions. Commun. Soil Sci. Plant Anal., 25, 859-879 (1994).
- 398 Alloway BJ (1995) Heavy Metal in Soils. Blackie Academic and Profesional.
- Scullion J, Edwards RW (1980) The effects of coal industry pollutants on the macro-invertebrate fauna of a small river in
 the South Wales coalfield. *Freshwater Biology* 10, 141–162.
- 402 Carlson CL. Carlson CA (1994) Impacts of coal pile leachate on a forested wetland in South Carolina. *Water Air and Soil* 403 *Pollution* 72, 89–109.
- Hall Jr LW, Burton DT (1982) Effects of power plant coal pile and coal waste runoff and leachate on aquatic biota: an
 overview with research recommendations. *Critical Reviews in Toxicology* 10, 287–302.
- 406 Tease B, Coler RA (1984) The effect of mineral acids and aluminum from coal leachate on substrate periphyton composition and productivity. *Journal of Freshwater Ecology* 2, 459–467.
- 408 Carlson CA (1990) Subsurface leachate migration from a reject coal pile in South Carolina. *Water Air and Soil Pollution* 409 53, 345–366.
- Nichols CR (1974) Development document for proposed effluent limitations guidelines and new source performance
 standards for the steam electric power generating point source category. Duluth, U.S.: United States
 Environmental Protection Agency Report No. EPA 440/1-73-029.
- 413 Rendig VV, Taylor HM (1989) Principles of Soil-Plant Interrelationships. New York: McGraw-Hill.
- 414 Francis W (1961) Coal Its Formation and Composition. London: Edward Arnold.
- 415 Swaine DJ (1990) Trace Elements in Coal. London: Butterworths.
- Rao PD, Walsh DE (1997) Nature and distribution of phosphorus minerals in Cook Inlet coals, Alaska. *International Journal of Coal Geology* 33, 19–42.
- Gerhart DZ, Richter JE, Curran SJ, Robertson TE (1980) Algal bioassays with leachates and distillates from western coal.
 Duluth, U.S.: United States Environmental Protection Agency, Report No. EPA-600/3-79-093.
- Ward CR (2002) Analysis and significance of mineral matter in coal seams. *International Journal of Coal Geology* 50, 135–168.
- 422 Swaine DJ, Goodarzi F (eds) (1995) Environmental Aspects of Trace Elements in Coal. Dordrecht: Kluwer.
- 423

424