
CHEMICAL ANALYSIS OF ITOBE LIMESTONE DEPOSIT FOR POTENTIAL IN CEMENT MANUFACTURING

ABSTRACT

In this research, the assessment of the chemical composition of the Itobe marble deposit for comparison with the general limestone requirements for cement making was investigated. Six pits were dug and carefully studied in the area. The research work is aimed at determining the suitability of the Itobe marble deposit in the manufacturing of cement, establish the nature, size and type of the deposit and to estimate the various impurities present and at what concentrations. The soil samples collected were analysed for their chemical properties. Samples were also obtained from river channels and from outcrops of the deposits. The result showed that an appreciable amount of the marble deposit, with CaO in the range of 32.95% to 50.05% and Silica ranging from 1.40% to 7.20%. From these chemical analyses, Itobe limestone showed a great potential in cement production to augment cement availability for building and civil engineering construction in Nigeria.

Key words: Marble deposit, cement, outcrops, river channels.

1. INTRODUCTION

Limestone is a sedimentary rock formed from the skeletons and shells of ocean organisms that consists chiefly of calcium carbonate. It is a primary raw material that is required in the manufacturing of cement and it is of high demand all over the world [1]. Limestone is a general term used to describe sedimentary rock composed primarily of calcium carbonate or combinations of calcium and magnesium

carbonate. There are numerous forms and types of limestone differing in chemical composition, mineralogy,

(Pg) 2 of (II)

crystallinity, colour, texture and hardness. Calcium and dolomite limestone are the two most fundamental types of limestone. Pure high calcium limestone is 100% calcium carbonate [2]. Limestone may contain varying amounts of impurities, the most common of which are Silica and alumina. Others are iron, phosphorous and sulphur. Clay, silt and sand that may have become incorporated in the limestone when it was first deposited or may have accumulated later in crevices and between strata. In some cases, iron, phosphorous and sulphur may also occur as impurities while trace substances such as manganese, copper, titanium, sodium, arsenic and fluorine can also be present [3].

Cement, on the other hand is a fine gray powder of calcined limestone and clay. It can be defined as a calcareous sedimentary rock composed of the mineral calcite (CaCO_3) which upon calcination yields lime (CaO) for commercial use. In its broadest definition the term 'cement' includes any calcareous material such as marble, chalk, travertine, tufa, lime shell, coral and marl, each possessing different distinct physical characteristics. The crystalline equivalents of limestone having the same chemical composition are calcite and aragonite [4]. Cements are finely ground powders that when mixed with water set to a hard mass. Setting and hardening which are as a result of hydration, is a chemical combination of the Cement compound with water which yields gel – like material with a high surface area. Due to the hydrating properties, constructional cements which will sets and hardens under water are often called hydraulic Cements. Cement is produced from raw materials such as limestone, chalk, shale, clay, and sand. These raw materials are quarried, crushed, finely ground, and blended to the correct chemical composition, the most important of these is Portland cement. Other types of Cements are processed slag containing high Silica and alumina [5]. Cement is mainly used in civil and building constructions. It can be used directly ("neat" as grounding materials) but the normal use is in mortar and Concrete in which the cement is mixed with inert material known as aggregate.

The availability of cement to meet the construction requirements of the country has been a great challenge over the years, and this has been responsible for increase in production of cement through importation as well as increased number of cement plants. However, despite these efforts, the available cement has still remained insufficient. It is based on this that this study is conducted with the aim of evaluating the Itobe for potential production of cement to augment the current cement production in the country.

The Itobe marble deposit is located near Allo village, just after Itobe, about 70km North East of Lokoja or about 25km East of Ajaokuta, within Latitude 07' 25.655'N and Longitude 006' 45' 111E/006.45.506'E within the basement complex of North Central Nigeria. The area is characterised by flat lowland with the marble deposit extending as ridge at an elevation of above 575 m. The climate has

distinct wet and dry seasons with an annual rainfall of about 1300mm while the mean temperature is about 30^oC.

(Pg) 3 of (II)

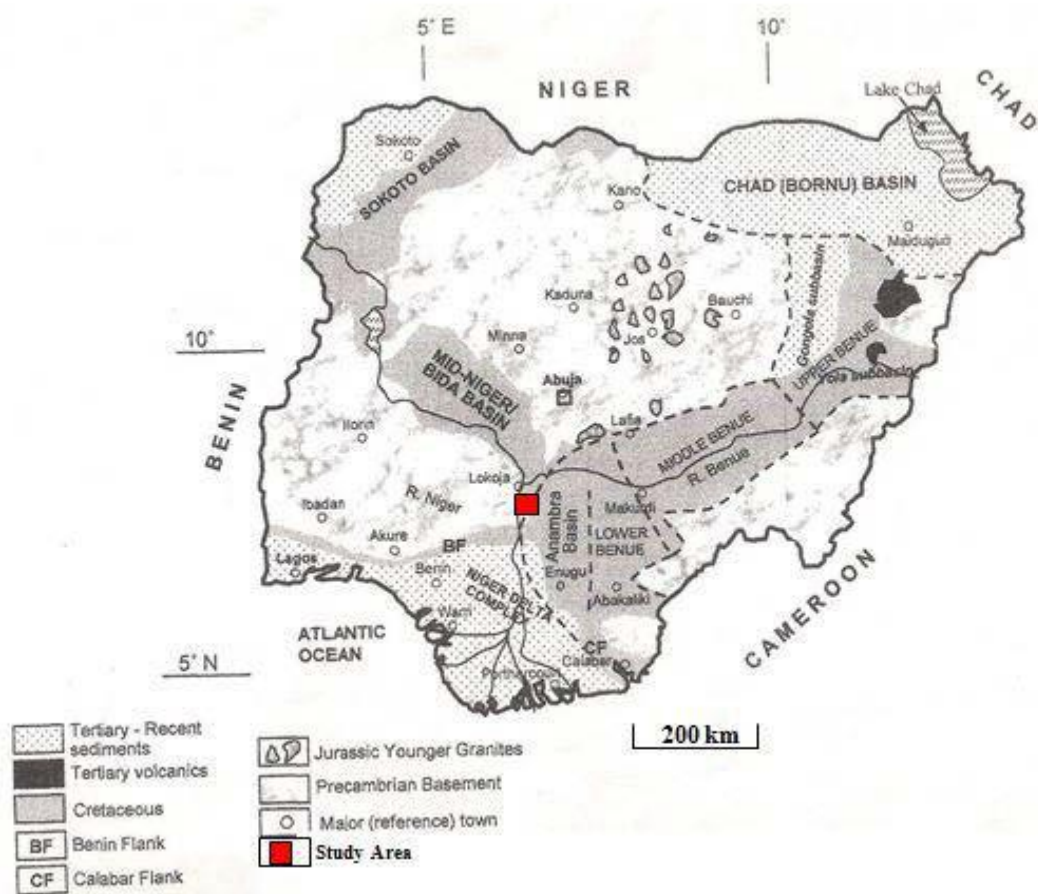


Figure 1: Geological sketch map of Nigeria showing the location of the study area

2. MATERIAL AND METHODS

2.1 Sampling

A Total of seven marble samples, adequately representing the deposits which stretched out to about 1km were obtained from six dug pits. This is in addition to those from river channels and from outcrops of the deposit.

Pit 1: Marble deposits were obtained at a depth of 1.8m. The pit is elevated at about 366ft. and at a distance of about 20 meter North East of the massive deposit. The top soil is thin, 0.1mm (dark

in colour). This is followed by brown lateritic soil that extends to a depth of 1.8m. The marble is crystalline, ash and relatively free from alteration.

Pit 2: Marble deposits were obtained at near surface, occurring in the form of boulders increasing in massiveness. The marble sample was obtained at a distance of about 10m eastward of the massive deposit.

Pit 3 & 4: The general profile of this pit is of top humus soil, dark in colour, extending to about 0.2-0.3m. This is followed by sand silted intercalation. At depth of 3.0m, no marble deposit was found.

Pit 5: Sample was collected at the surface and at a depth of 2.5m. The area is highly weathered with the marble turning to light brown in colour with whitish fine particle dust. The pit area is at an elevation of 450ft, and at a distance of 30m southward.

Clay; Pit 6: In order to obtain suitable clay material within 10km of the marble deposit, 3 pits at 3m depth were dug, however, at that depth, two of the pits showed only silt and sandstone intercalation, thus samples were not obtained at the points. Sampling was done at the third pit located behind the marble ridge at depths of 1m and 2m.

2.3 Experimental

The following **chemical** parameters were analysed for comparison of the general limestone requirement for cement making using the analytical procedures in line with the standards for chemical analysis [6]. They are CaO, MgO, Cl, SiO₂ and Al₂O₃, while K₂O, SO₃, and Na₂O were analysed. Alumina; (Al₂O₃), Sodium oxide; (**Na₂O**) and Potassium oxide; (**K₂O**) were analysed using X-Ray Fluorescence Spectrometer while classical method was used for calcium oxide; (**CaO**), sodium oxide; (**NaO**) and chloride; (**Cl**).

3. RESULTS AND DISCUSSION

All the values of the elements analysed in the marble samples based on their total metal contents expressed in percentages are presented in Table 1 and are within acceptable range as reported worldwide in marble and limestone samples. Although pit 5 shows a rather high Silica content and a much lower values of CaO and MgO content. **The results of these preliminary chemical analyses** gave CaO in the range of 32.95% - 50.05% with silica ranging from 1.40% - 7.20% for all marble samples with

the exception of pit 5 samples. The results in Table 1 is within the range reported by (Boynton, 1980) as shown in Table 2, and that of Britannica encyclopaedia (2011) in Table 3 for typical limestone materials for different parts of the

(Pg) 5 of (II)

world which are being used for cement manufacturing. Although, the result in Table 1 is a little lower than those of Portland cement by (Brandes, 1983) and (Messaoudene and Jauberthie 2010), the results obtained showed an appreciable percent content that is required for any quality cement production. The results of the analysis in Table 1 also show rather lower impurity content expressed in percentages. The impurity content reported by Boynton (1980) are much higher than those of the analysed samples. Also, those of Murray (1954) are also of higher percent content compared to those of the analysed samples. The percent silica content of the analysed clay samples is within the range reported by Britannica Encyclopaedia (2011).

TABLE 1: CHEMICAL COMPOSITION OF THE ITOBE LIME STONE DEPOSITS

S/N	Sample code	TestedParameters							
		CaO	MgO	SO ₃	Cl	SiO ₂	Al ₂ O ₃	K ₂ O	Na ₂ O
		%	%	%	%	%	%	%	%
1	Pit 1(1.8)	50.05	2.32	1.972	ND	2.60	ND	0.22	0.14
2	Pit 2(surface)	46.27	5.34	1.798	ND	2.80	0.60	0.53	0.06
3	Pit 2B(2.5m)	48.51	3.43	1.623	ND	1.40	1.00	0.23	0.10
4	Massive Deposits (surface)	47.11	2.72	2.397	ND	7.20	0.60	0.16	0.10
5	River channel Exposure	32.95	Trace	2.147	ND	4.10	0.80	0.22	0.20
6	Pit (surface)	5A 0.42	0.50	1.623	ND	66.40	20.00	2.20	0.30

7	Pit 5B (2.5m)	0.42	0.30	1.898	ND	60.40	21.20	2.57	0.09
8	Clay (1m)	0.70	1.71	1.398	ND	55.75	-	1.63	0.02
9	Clay (2m)	0.84	0.50	2.0437	ND	54.00	-	1.54	0.04

(Pg) 7 of (II)

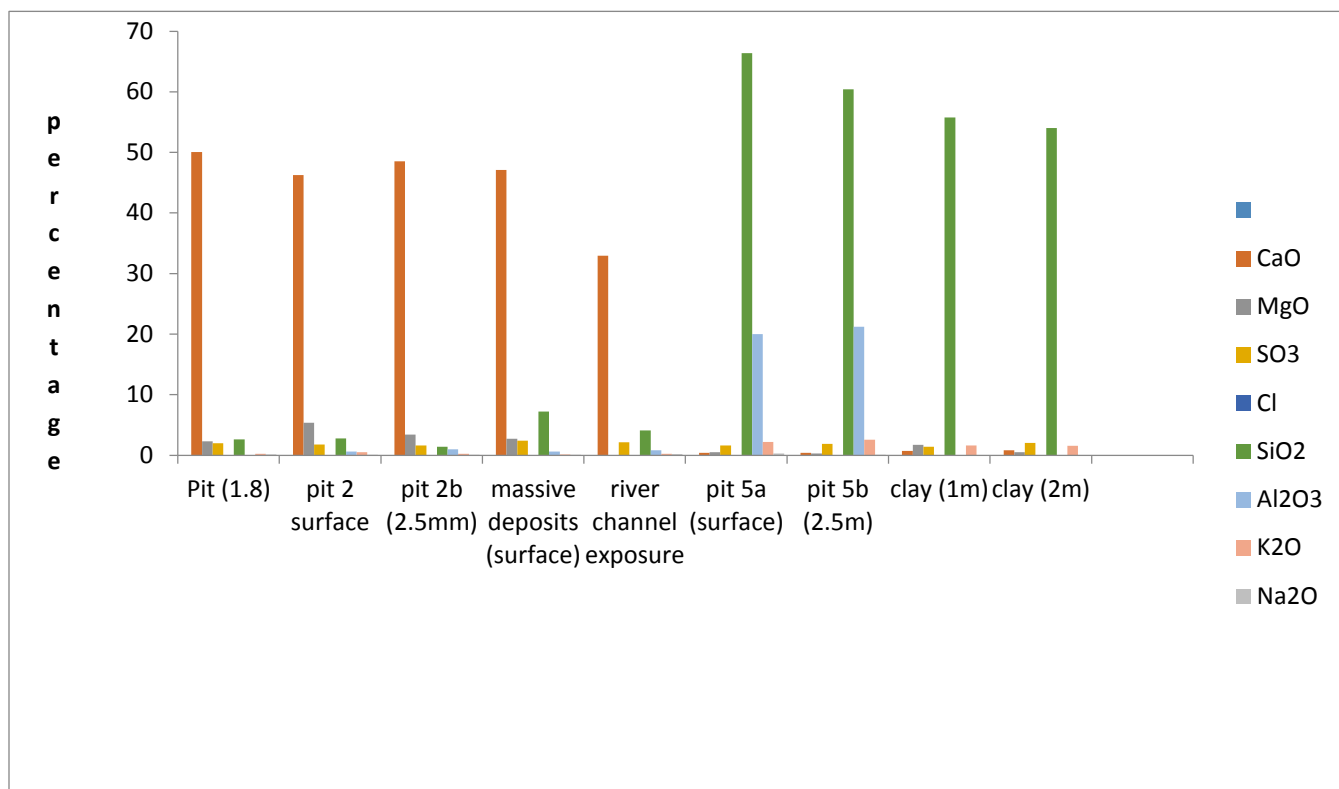


Fig. 1. Chemical Composition of Itope Limestone deposit

Table 2 and 3 show a comparative representation of different types of limestone and their chemical compositions. Table 3 presents typical percentages of impurities in limestone raw materials for cement production and tables 5, 6 and 7 show typical chemical composition of cement from different parts of the world

TABLE 2: REPRESENTATIVE CHEMICAL ANALYSIS (PERCENTAGE COMPOSITION) OF DIFFERENT TYPES OF LIMESTONE (Boyton, 1980)

S/N	%CaO	%MgO	% SiO ₂	% Al ₂ O ₃	% Fe ₂ O ₃	% Na ₂ O
1	54.54	0.59	0.70	0.68	0.08	0.16
2	38.90	2.72	19.82	5.40	1.60	-
3	41.84	1.94	13.44	4.55	0.56	0.31
4	31.20	20.45	0.11	0.30	0.19	0.06
5	29.45	21.12	0.14	0.04	0.10	0.01
6	45.65	7.07	2.55	0.23	0.20	0.04

The sample numbers in Table 2 above corresponds to the followings:

- 1 - Indiana high calcium stone
- 2 - Lehigh valley cement rock

- 3 - Pennsylvania, cement rock
- 4 - Illinois Niagara dolomite stone
- 5 - North-western Ohio Niagara stone
- 6 - New York Magnesium stone

(Pg) 9 of (II)

TABLE 3: PERCENTAGE COMPOSITION OF SOME TYPICAL RAW MATERIALS USED FOR THE MANUFACTURE OF PORTLAND CEMENT (Britanica online encyclopedia, 2011).

Raw material	%CaO	%SiO ₂	%Al ₂ O ₃	%Fe ₂ O ₃	%MgO	%LOI
Limestone	52	3	1	0.5	0.5	42
Chalk	54	1	0.5	0.2	0.3	43
Cement rock	43	11	3	1	2	36
Clay	1	57	16	7	1	14
Slag	42	34	15	1	4	0

TABLE 4: MAJOR IMPURITIES IN HIGH CALCIUM LIMESTONE (Murray, 1954)

Element	percentage
SiO ₂	0.10 -2.89
Al ₂ O ₃	0.13 -0.92
Na ₂ O	0.00 - 0.16

MgO

0.12 - 3.11

Other impurities in raw material that must be strictly limited are fluorine compounds, phosphorus, metal oxides and sulphide and excessive alkaline.

(Pg) 10 of (II)

TABLE 5: CHEMICAL COMPOSITION OF CEMENT (Dunuweera SP and Rajapakse, 2018)

Element	Percentage
SiO ₂	21.5
Al ₂ O ₃	5.20
Fe ₂ O ₃	2.8
CaO	65.6
MgO	1.53
K ₂ O	0.73
Na ₂ O	0.15
SO ₃	2.53
LOI	1.58

Table 6: CHEMICAL COMPOSITION OF PORTLAND CEMENT (Brandes, 1983)

Element	Percentage
SiO ₂	5.5
Al ₂ O ₃	39
Fe ₂ O ₃	10

MgO	5.82
CaO	7.62
FeO	6
LOI	1.13

(Pg) 11 of (II)

TABLE 7: CHEMICAL COMPOSITION OF CEMENT (% BY WEIGHT) (Messaoudene and Jauberthie, 2010)

Element	Percentage
CaO	66.60
MgO	0.95
SiO₂	22.40
Al₂O₃	2.96
Fe₂O₃	2.33
SO₃	2.13
Na₂O	0.10

CONCLUSIONS

From the results of tests conducted and analysed on the Itobe limestone for potential use in cement production, the following conclusions are made

- (i) The analysed marble samples showed an appreciable metal content that is adequate for a good and quality cement production.
- (ii) The results of the total metal contents analysis of the clay sample are within the **range required for cement manufacturing**.
- (iii) The mineral composition of the Itobe marble is essentially calcite with little dolomite and **quartz** which is quite good for a quality cement production.

(Pg) 12 of (II)

REFERENCES

1. Serra R. Dictionary of Geology. Academic (India) Publishers, New Delhi – 110008; 2006.
2. Syamala KD, Vijaya VL and Alakanandana A. Impacts of Cement Industry on Environment - An Overview. Asia Pacific Journal of Research.2017; 1 (57), 156-160.
3. Onimisi M, Obaje N and Daniel A. Geochemical and petrogenetic characteristics of the marble deposit in Itobe area, Kogi state, Central Nigeria. Pelagia Research Library Advances in Applied Science Research. 2013; 4(5):44 -57.
4. Messaoudene I and Jauberthie R. Marble Filler: Does it retard the dissolution of cement constituents? International scholarly research network. ISRN Material Science. 2010; (2011)1-5.
5. US Environmental Protection Agency. Available and Emerging Technologies for Reducing Greenhouse Gas Emissions from the Portland cement Industry, North Carolina, USA. 2010.
6. Annual books of ASTM standards. 1990; section 3, vol. 03-05.
7. Brandes. Smith ells Metal reference book. 6th edition. Butterworth and co. Ltd; 1983.
8. Boynton RS. Chemistry and Technology of Lime and Limestone. Second Edition. John Wiley & Sons; 1980.
9. Britannica online Encyclopaedia. Cement (Building material). 2011
10. Murray JA. Shrinkage of **H**igh Calcium Limestone **D**uring Burning. Journal of America Ceramic Society. 1954; (37): 323 – 328.

11. Dunuweera SP and Rajapakse RMG. Cement Types, Composition, Uses and Advantages of Nano cement, Environmental Impact on Cement Production, and Possible Solutions. *Advances in Materials Science and Engineering*. 2018:1-11.
12. Dexter P. *Mineralogy* 2nd ed. 2001; 142- 143. Prentice Hall publishers.
13. Taylor PD and Wilson MA. Paleocology and Evolution of Marine Hard Substrate Communities. *Earth – science Reviews*. 2003; (62): 1-103.
14. Trewin NH and Davidson RG. Lake level changes, sedimentation and faunas in a middle Devonian basin – margin fish bed. *Geological society*. 1999; (156): 535 – 548.
15. Felix BF and Yomi BG. Geology and Occurrences of Limestone and Marble in Nigeria. *Journal of Natural Sciences Research Journal*. 2013; 3 (11).
16. Ali M, Nathaniel GG and Mohammed SC. Geological Exploration of Marble Deposits in Toto Area, Nasarawa State, Nigeria. *Natural Resources Journal*. 2016; (7) 83-92.
17. The impact of Obajana cement company as a growth pole in Obajana, Kogi State, Nigeria. Musa D and Kpanache D. *Ethiopian Journal of Environmental Studies & Management*. 2014; 7(1): 73 – 81.
18. Elueze AA and Okunlola OA. Compositional Features and Industrial Appraisal of the Metamorphosed Carbonate Rocks of Burum and Jakura Area, Central Nigeria. *Mineral Wealth Journal*. 2003; (128): 41-45.
19. Akpan IO, Amodu AE and Akpan AE. An Assessment of the Major Elemental Composition and Concentration in Limestones Samples from Yandev and Odukpani Areas of Nigeria Using Nuclear Techniques. *Journal of Environmental Science and Technology*. 2011; 4 (3): 332-339.
20. Anonymous. Welcome to the Limestone city. Accessed 13th February 2008. Available: <http://en.wikipedia.org/wiki/Limestone>

